

Contents

1. Description	7
2. Kit List.....	8
3. Introduction	16
3.1 What is Micro:bit?	16
3.2 Comparison between V2.0 & V1.5.....	17
3.3 Pinout	19
3.4 Notes for the application of Micro:bit main board V2.0.....	21
4. Install Micro:bit driver	22
5. Getting Started with Micro:bit.....	22
5.1 Write code and program	22
5.2 Makecode:	30
5.3 Quick Download	31
5.4 Resources and test code.....	35
5.5 Input test code	36
5.6 CoolTerm Installation.....	40
6. Projects.....	43
Project 1: Heartbeat	43
(1) Project Description	43
(2) Components Needed:	44
(3) Test Code:.....	44
(4) Test Results:	46
Project 2: Light A Single LED	46

(1)Project Description:	46
(3)Test Code:	47
(4)Test Results	51
Project 3: LED Dot Matrix	51
(1)Project Description:	52
(2)Components Needed:	52
(3)Test Code 1:	52
(4)Test Results 1:	55
(5) Test Code 2:	56
(6)Test Results 2:	62
Project 4: Programmable Buttons.....	63
(1)Project Description:	63
(2)Components Needed:	63
(3)Test Code 1:	63
(4)Test Results 1:	66
(5) Test Code 2:	66
(6)Test Results 2:	73
Project 5: Temperature Detection.....	73
(1)Project Description:	73
(2)Components Needed:	73
(3)Test Code 1:	74
(4)Test Results 1:	76
(5)Test Code 2:	81
(6)Test Results 2:	84

Project 6: Geomagnetic Sensor	85
(1)Project Description:	85
(2)Components Needed:	85
(3)Test Code 1:	85
(4)Test Results 1:	87
(5) Test Code 2:	88
(6) Test Results 2	99
Project 7: Accelerometer	100
(1)Project Description:	100
(2)Components Needed:	100
(3)Test Code 1:	100
(4)Test Results 1:	105
(5)Test Code 2:	107
(6) Test Results 2	111
Project 8: Light Detection	115
(1)Project Description:	115
(2)Components Needed:	116
(3)Test Code:	116
(4)Test Results:	118
Project 9: Speaker.....	121
(1)Project Description:	121
(2)Components Needed:	121
(3)Test Code:	121
(4)Test Results:	124

Project 10: Touch-sensitive Logo	124
(1)Project Description:	124
(2)Components Needed:	125
(3)Test Code:	125
(4)Test Results:	129
Project 11: Microphone	129
(1)Project Description:	130
(2)Components Needed:	130
(3)Test Code 1:	130
(4)Test Results 1:	132
(5)Test Code 2:	132
(6)Test Results 2:	139
Project 12: Bluetooth Wireless Communication	140
(1)Project Description:	141
(2) Preparation	141
(3) Procedures:.....	141
Project 13: Hello world!	160
Project 14: LED Blinks	166
Project 15: Breathing Effect	168
Project 16: LED Blinks and Breathes	172
Project 17: Make A Sound	175
Project 18: Play Music.....	177
Project 19: Change Colors	185
Project 20: Button Control.....	188

Project 21: Tilt Control.....	191
Project 22: Light Interrupter	193
Project 23: Capacitive Touch.....	197
Project 24: Traffic Light.....	200
Project 25: Magnetic Detection	203
Project 26: Follow Black Line	206
Project 27: Obstacle Avoidance	209
Project 28: Someone Comes.....	212
Project 29: Fire Alarm	215
Project 30: To the Top.....	219
Project 31: Magnetic Switch	223
Project 32: Relay Module.....	226
Project 33: Ultrasonic Ranging	229
Project 34: Light Brightness.....	235
Project 35: Analog Temperature	238
Project 36: Hear Footsteps	242
Project 37: Rotary Potentiometer	246
Project 38: Alcohol Content in the Air	249
Project 39: Flammable Gas in the Air.....	253
Project 40: Ambient Temperature Detection	257
Project 41: Ambient Light.....	261
Project 42: Detect Soil Humidity.....	265
Project 43: Water Level Alarm	270
Project 44: Ultraviolet Detection.....	273

Project 45: Vapor in the Air.....	277
Project 46: Pressure Detection.....	282
Project 47: Light Controlled By Vibration	285
Project 48: Joystick	288
Project 49: Micro Servo	292
Project 50: Add 1602 LCD Display	297
Project 51: Add OLED Display.....	302
Project 52: DHT11 Temperature And Humidity Sensor.....	307
Project 53: IR Remote Control Decoding.....	312
Project 54: IR Remote Control RGB.....	319
Project 55: Fan Module.....	323
Project 56: Knock Sensor	326
Project 57: Magic Light Cup Sensor.....	328
7. Resources	339

1. Description





The [micro: bit](#) is a mighty, and programmable computer designed by the BBC. Only half the size of a credit card, it integrates onboard Bluetooth, an accelerometer, a compass, three buttons, a 5x5 LED matrix, a USB interface and connection pins.





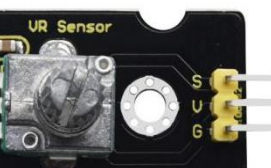



To bring computer science education and STEM topics to every student,





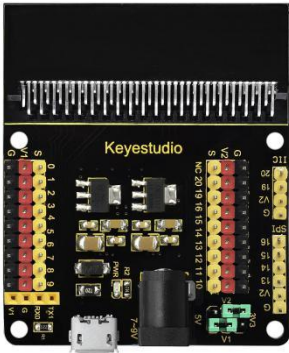


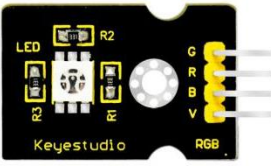

keystudio group launch this kit in consisting of a sensor shield fully compatible with micro:bit and other commonly used sensor modules.



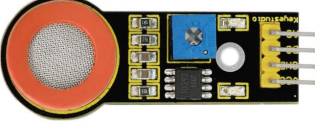
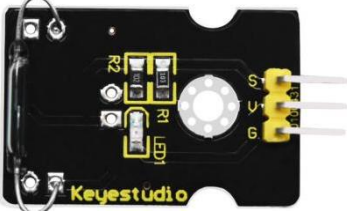


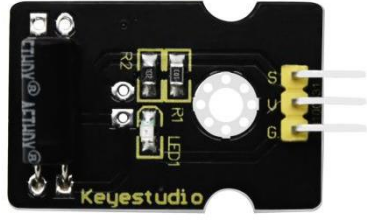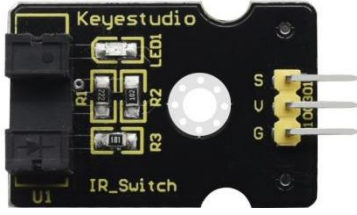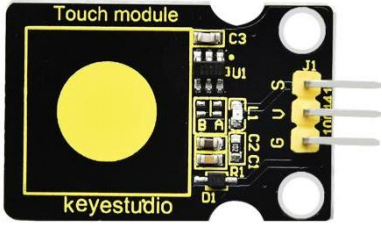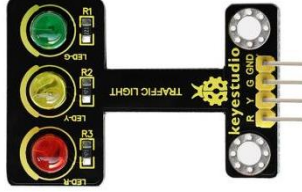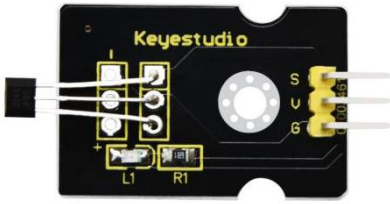


In addition, this sensor kit also provides various learning projects for you, including wiring diagram, source code and more. You make learn and enjoy the programming easily.



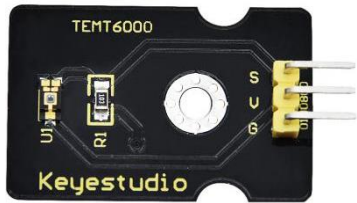

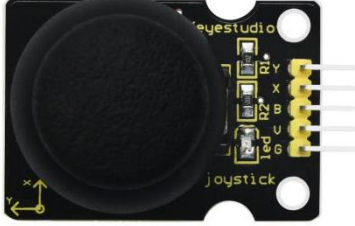

2. Kit List



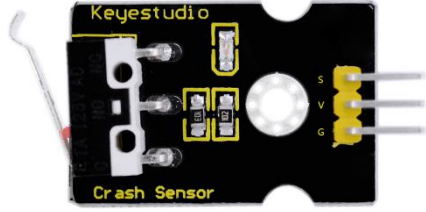




No.	Mode	QTY	Picture
1	Keystudio Micro bit Sensor Shield V2	1	 A black PCB sensor shield for a micro:bit. It features a micro:bit connector on the left, a USB Type-C port at the bottom, and various electronic components including a microcontroller, resistors, and a potentiometer. The board is populated with several sensors and has a breadboard-style pin header on the right side.
2	keystudio White LED Module	1	 A small black PCB module with a white LED. It includes a potentiometer, resistors, and a microcontroller. The board has three pins on the right side labeled S, U, and G.
3	keystudio red LED Module	1	 A small black PCB module with a red LED. It includes a potentiometer, resistors, and a microcontroller. The board has three pins on the right side labeled S, U, and G.
4	keystudio 3W LED Module	1	 A small black PCB module with a 3W LED. It includes a potentiometer, resistors, and a microcontroller. The board has three pins on the right side labeled S, U, and G.


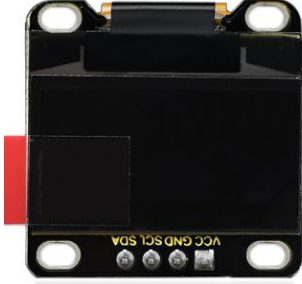
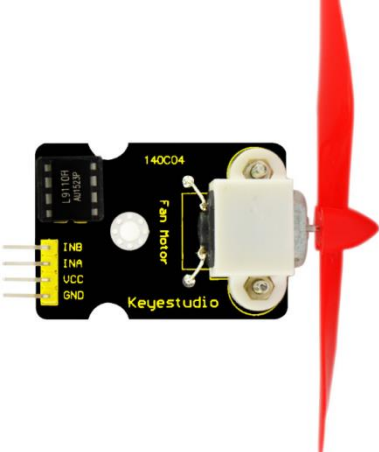
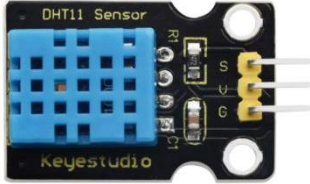

5	keyestudio RGB LED Module	1	 <p>The image shows a black PCB module with three yellow headers labeled G, R, and B. It features an LED, several resistors (R1, R2), and the text 'Keyestudio' and 'RGB'.</p>
6	keyestudio Analog Temperature Sensor	1	 <p>The image shows a black PCB module with a temperature sensor, a potentiometer, and three yellow headers labeled S, U, and G. It includes a resistor (R1) and the text 'Keyestudio'.</p>
7	keyestudio Photocell Sensor	1	 <p>The image shows a black PCB module with a photocell sensor, a potentiometer, and three yellow headers labeled S, U, and G. It includes a resistor (R1) and the text 'Keyestudio'.</p>
8	keyestudio Analog Sound Sensor	1	 <p>The image shows a black PCB module with a microphone, a potentiometer, and three yellow headers labeled S, U, and G. It includes various components like resistors (R1, R2), capacitors (C1, C2, C3, C4, C5, C6), and diodes (D1, D2). The text 'Keyestudio' is visible.</p>
9	keyestudio Analog Rotation Sensor	1	 <p>The image shows a black PCB module with a rotation sensor, a potentiometer, and three yellow headers labeled S, U, and G. It includes a capacitor (C1) and the text 'Keyestudio'.</p>
10	keyestudio Passive Buzzer module	1	 <p>The image shows a black PCB module with a passive buzzer, a potentiometer, and three yellow headers labeled S, U, and G. It includes a resistor (R1) and the text 'Keyestudio'.</p>
11	keyestudio Active Buzzer Module	1	 <p>The image shows a black PCB module with an active buzzer, a potentiometer, and three yellow headers labeled S, U, and G. It includes a resistor (R1) and the text 'Keyestudio'.</p>
12	keyestudio Digital Push Button	1	 <p>The image shows a black PCB module with a yellow push button, a potentiometer, and three yellow headers labeled S, U, and G. It includes a resistor (R1) and the text 'Keyestudio'.</p>

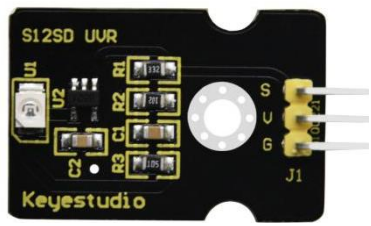
13	keystudio Digital Tilt Sensor	1	 A black PCB module with a central white circular sensor, two LEDs, and three pins labeled S, U, G.
14	keystudio Photo Interrupter Module	1	 A black PCB module with an IR switch (U1), two LEDs (R1, R2), and three pins labeled S, U, G.
15	keystudio Capacitive Touch Sensor	1	 A black PCB module with a large yellow circular touch area, a microcontroller (U1), and three pins labeled S, U, G.
16	Keystudio Traffic Light Module	1	 A black PCB module with three LEDs (R1, R2, R3) in green, yellow, and red, and three pins labeled S, U, G.
17	keystudio Hall Magnetic Sensor	1	 A black PCB module with a white circular sensor, two LEDs (L1, R1), and three pins labeled S, U, G.
18	keystudio Line Tracking Sensor	1	 A black PCB module with two white circular sensors, a microcontroller (U1), and three pins labeled S, U, G.
19	keystudio Infrared Obstacle Detector Sensor	1	 A black PCB module with an infrared sensor (U1), a microcontroller (U2), and three pins labeled S, U, G.
20	keystudio PIR Motion Sensor	1	 A black PCB module with a white circular PIR sensor, a microcontroller (U1), and three pins labeled S, U, G.
21	keystudio Flame Sensor	1	 A black PCB module with a flame sensor (U1), a microcontroller (U2), and three pins labeled S, U, G.

22	keyestudio Crash Sensor	1	 A black PCB module with a white circular sensor in the center, labeled 'Crash Sensor' and 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
23	keyestudio Analog Gas Sensor	1	 A black PCB module with a circular metal mesh sensor on the left, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
24	keyestudio Analog Alcohol Sensor	1	 A black PCB module with a circular red and black mesh sensor on the left, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
25	keyestudio Reed Switch Module	1	 A black PCB module with a circular white sensor in the center, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
26	keyestudio Water Sensor	1	 A black PCB module with a series of horizontal metal strips on the left, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
27	keyestudio Soil Humidity Sensor	1	 A black PCB module with two long, thin metal probes on the left, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
28	keyestudio LM35 Linear Temperature Sensor	1	 A black PCB module with a circular white sensor in the center, labeled 'LM35' and 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
29	Keyestudio Vibration Sensor	1	 A black PCB module with a circular white sensor in the center, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.
30	keyestudio Thin-film Pressure	1	 A black PCB module with a long, thin metal probe on the left, labeled 'Keyestudio'. It has three pins on the right labeled 'S', 'V', and 'G'.

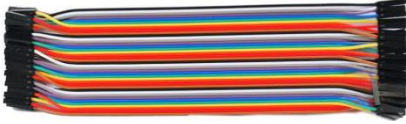
	Sensor		
31	keyestudio GUVA-S12SD 3528 Ultraviolet Sensor	1	
32	keyestudio 1602 I2C Module	1	
33	keyestudio TEMT6000 Ambient Light Sensor	1	
34	HC-SR04 Ultrasonic Module	1	
35	keyestudio Joystick Module	1	
36	keyestudio Micro Servo	1	

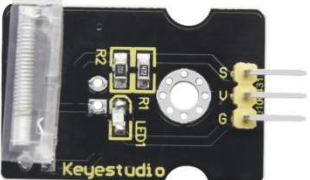37	keyestudio Single Relay Module	1	 <p>The image shows a black PCB relay module with a blue relay component in the center. The relay is labeled 'SONGLE' and 'SRD-05VDC-SL-C'. It has a 4-pin header on the right side with pins labeled S, U, G, and A. Other components include a 5-pin header labeled 'CON2', a diode 'D1', a resistor 'R1', and a transistor 'Q1'.</p>
38	keyestudio Steam Sensor	1	 <p>The image shows a black PCB steam sensor module. It features a white circular sensor element in the center. The PCB is labeled 'Steam Sensor' at the top and 'Keyestudio' at the bottom. It has a 3-pin header on the right side with pins labeled S, U, and G. Other components include a resistor 'R1', a capacitor 'C1', and a transistor 'Q1'.</p>
39	F-F Dupont Jumper Wire 40pin	1	 <p>The image shows a bundle of 40 multi-colored jumper wires with Dupont-style connectors on both ends.</p>
40	USB Cable	1	 <p>The image shows a black USB cable with a standard USB-A connector on one end and a micro-USB connector on the other.</p>
41	Premium Battery Holder 6-cell AA	1	 <p>The image shows a black plastic battery holder designed for six AA batteries. It has a red and black wire extending from the bottom, which is connected to a USB-A connector.</p>
42	Keyestudio Knock Sensor Module	1	 <p>The image shows a black PCB knock sensor module. It features a clear plastic sensor element on the left side. The PCB is labeled 'Keyestudio' at the bottom. It has a 3-pin header on the right side with pins labeled S, U, and G. Other components include a resistor 'R1', a capacitor 'C1', and a transistor 'Q1'.</p>
43	Keyestudio Digital IR Receiver Module	1	 <p>The image shows a black PCB digital IR receiver module. It features a clear plastic IR receiver window on the left side. The PCB is labeled 'Keyestudio' at the top and 'IR Receiver' at the bottom. It has a 3-pin header on the right side with pins labeled S, U, and G. Other components include a resistor 'R1', a diode 'D1', a capacitor 'C1', and a transistor 'Q1'.</p>

44	Keyestudio Magic Light Cup Sensor	2	
45	Keyestudio 0.96inch OLED Module	1	
46	Keyestudio L9110 Fan Module	1	
47	Keyestudio DHT11 Temperature and Humidity Sensor	1	
48	Keyestudio 18B20 Temperature Sensor	1	

49	Keyestudio IR Remote Control	1	
----	------------------------------	---	--

KS4010

50	<p>Keyestudio BBC</p> <p>Micro bit</p> <p>motherboard</p>	1	
----	--	---	--

KS4009

The micro bit motherboard is not included in KS4009 kit

3. Introduction

3.1 What is Micro:bit?


Designed by BBC, Micro:bit main board aims to help children aged above 10 years old to have a better learning of programming.

It is equipped with loads of components, including a 5*5 LED dot matrix, 2 programmable buttons, a compass, a Micro USB interface and a Bluetooth module and others. Though it is just the size of a credit card, it boasts multiple functions. To name just a few, it can be applied in programming video games, making interactions between light and sound, controlling a robot, conducting scientific experiments, developing wearable devices and make some cool inventions like robots and musical instruments, basically everything imaginable.


This new version, that's the version 2.0, of Micro:bit main board has a touch-sensitive logo and a MEMS microphone. And there is a buzzer built in the other side of the board which makes playing all kinds of sound possible without any external equipment. The golden fingers and gears added provide a better fixing of crocodile clips. Moreover, this board has a sleeping mode to lower the power consumption of battery and it can be entered if users long press the Reset & Power button on the back of it. More importantly, the CPU capacity of this version is much better than that of the V1.5 and the V2 has more RMA.

In final analysis, the Micro:bit main board V2 can allow customers to explore more functions so as to make more innovative products.

3.2 Comparison between V2.0 & V1.5

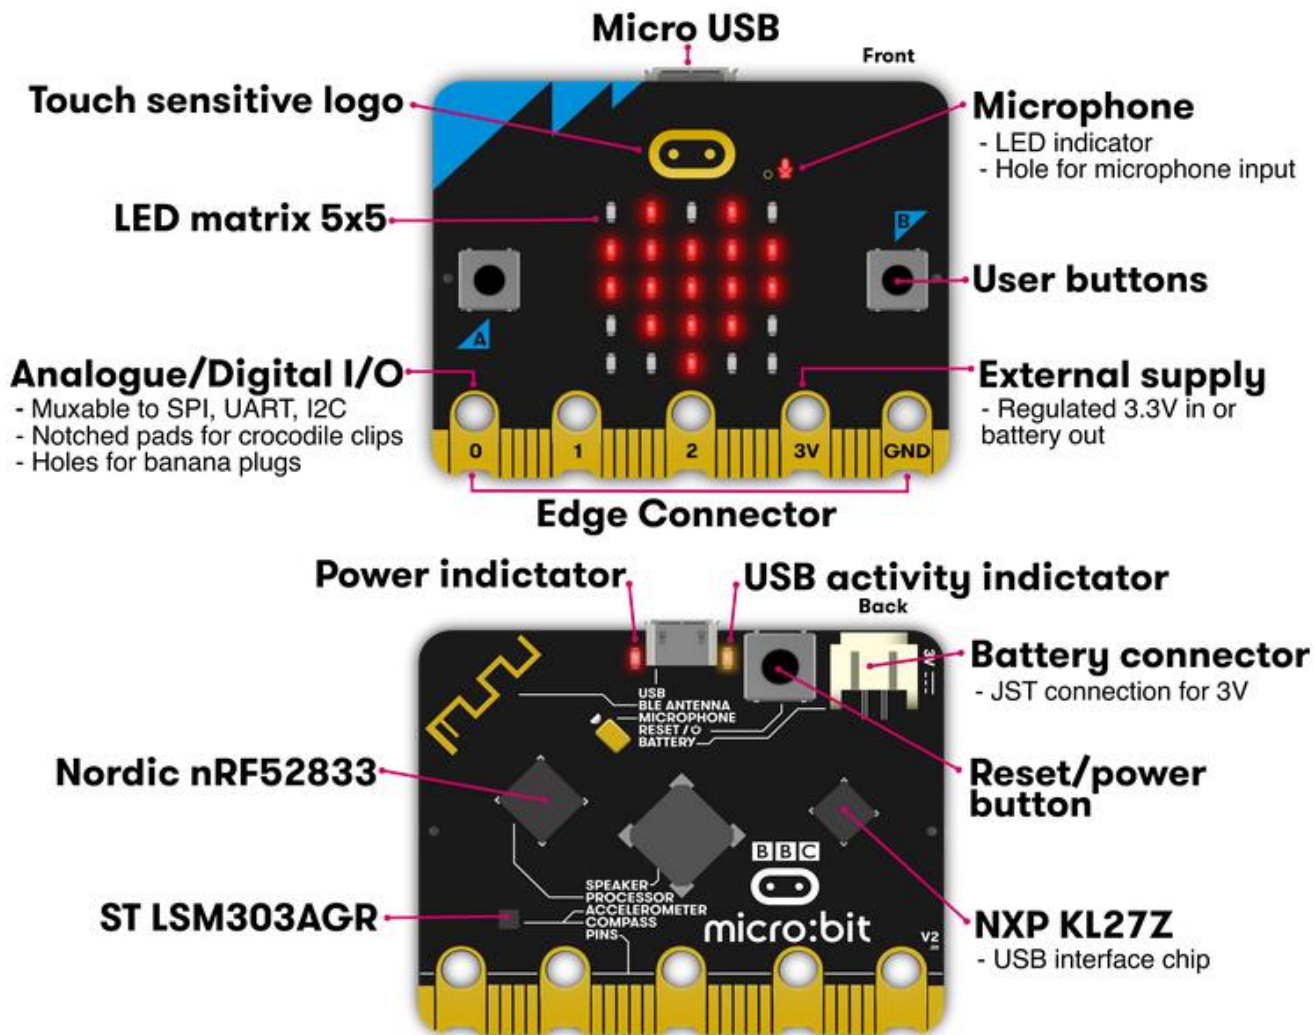

Micro:bit main board V2.0

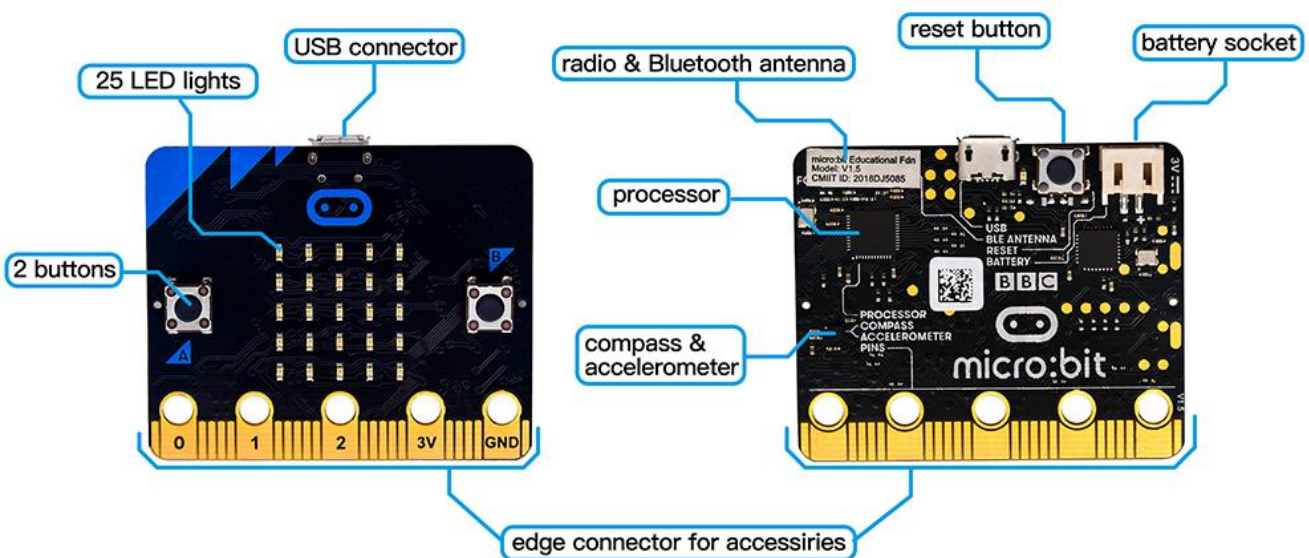

Micro:bit main board V1.5

More details:



	V1.5	V2
PROCESSOR	Nordic Semiconductor nRF51822	Nordic Semiconductor nRF52833
MEMORY	256KB Flash, 16KB RAM	512KB Flash, 128KB RAM
INTERFACECHIP	NXP KL26Z, 16KB RAM	NXP KL27Z, 32KB RAM
MICROPHONE	N/A	MEMS microphone and LED indicator
SPEAKER	N/A	On board speaker
TOUCH	N/A	Touch sensitive logo
EDGE CONNECTOR	25pins,PWM,I2C,SPI and Extension interface. 3 ring pins for connectin crocodile clips/banana plugs.	
	3 dedicated GPIO	4 dedicated GPIO Notched for easier connection
I2C	Shared (mux) I2C bus	Dedicated I2C bus
WIRELESS	2.4GHz Radio/BLE Bluetooth 4.0	2.4GHz Radio/BLE Bluetooth 5.0
POWER	Micro USB 5V power supply, 3V port or battery power supply	Micro USB 5V power supply, 3V port or battery power supply LED Indicator, Power off (push and hold power button)
CURRENT AVAILABLE	90mA	200mA
MOTION SENSOR	ST LSM 303	
PROGRAMMING SOFTWARE	C++, Makecode, Python, Scratch	
SIZE	5cm(W) x 4cm(H)	

For the Micro: Bit main board V2, pressing the Reset & Power button , it will reset the Micro: Bit and rerun the program.If you hold it tight, the red LED will slowly get darker.When the power indicator becomes darker, releasing the button and your Micro: Bit board will enter sleep mode for power saving .This will make your battery more durable. And you could press this button again to 'wake up' your Micro:bit.

For more information,please resort to following links:

<https://tech.microbit.org/hardware/>



<https://microbit.org/new-microbit/>

<https://www.microbit.org/get-started/user-guide/overview/>

<https://microbit.org/get-started/user-guide/features-in-depth/>

3.3 Pinout

Micro:bit main board V2.0 VS V1.5

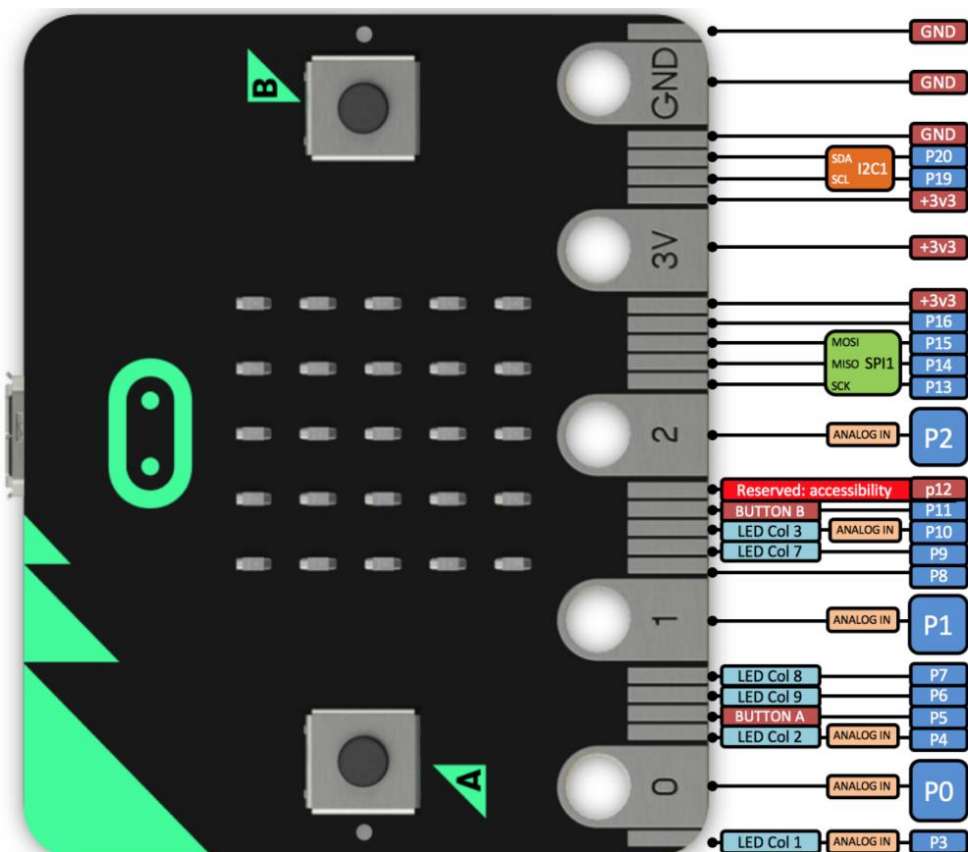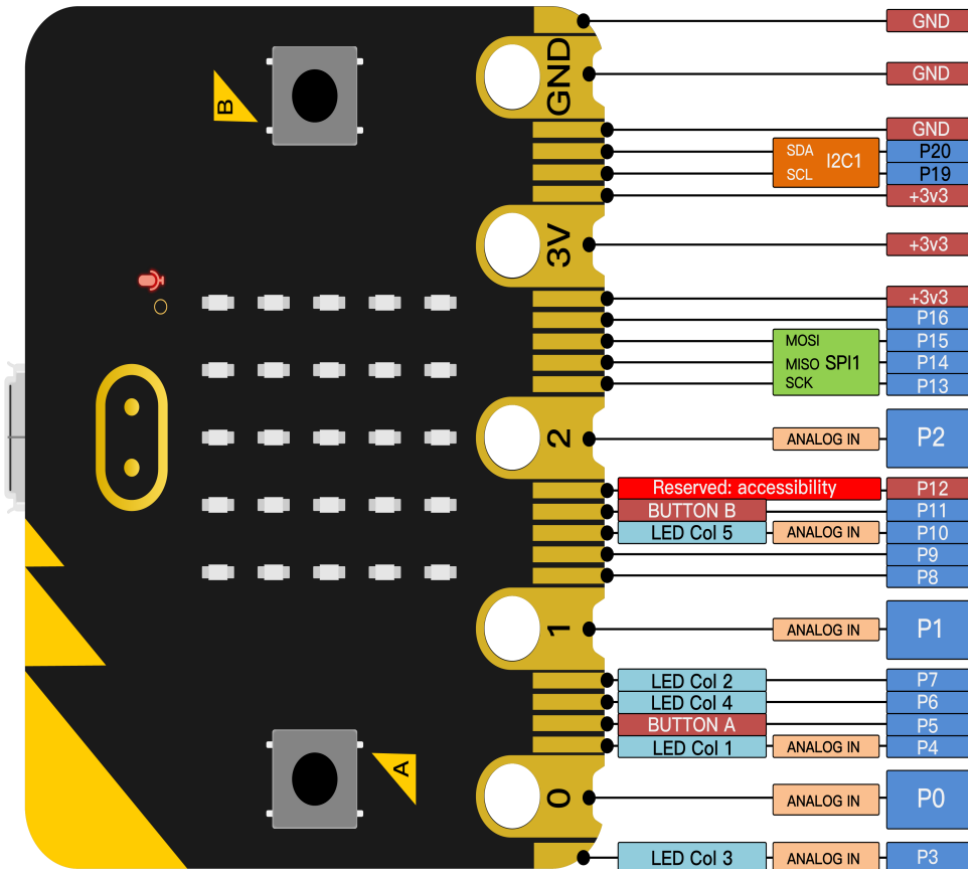

Browse the official website for more details:

<https://tech.microbit.org/hardware/edgeconnector/>

<https://microbit.org/guide/hardware/pins/>

3.4 Notes for the application of Micro:bit main board V2.0

- a. it is recommended to cover it with a silicone protector to prevent short circuit for it has a lot of sophisticated electronic components.
- b. its IO port is very weak in driving since it can merely handle current less than 300mA. Therefore, do not connect it with devices operating in large current, such as servo MG995 and DC motor or it will get burnt. Furthermore, you must figure out the current requirements of the devices before you use them and it is generally recommended to use the board together with a Micro:bit shield.
- c. It is recommended to power the main board via the USB interface or via the battery of 3V. The IO port of this board is 3V, so it does not support sensors of 5V. If you need to connect sensors of 5 V, a Micro: Bit expansion board is required.
- d. When using pins (P3, P4, P6, P7, P10) shared with the LED dot matrix, blocking them from the matrix or the LEDs may display randomly and the data about sensors maybe wrong.
- e. The battery port of 3V cannot be connected with battery more than 3.3V or the main board will be damaged.
- f. Forbid to use it on metal products to avoid short circuit.

To put it simple, Micro:bit V2 main board is like a micro computer which has made programming at our fingertips and enhanced digital innovation. And

about programming environment, BBC provides a website:

<https://microbit.org/code/>, which has a graphical MakeCode program easy for use.

4. Install Micro:bit driver

If you have downloaded micro:bit driver, then no need to download it again.


If it is your first time to use micro:bit main board, then you will have to download the driver.

First of all, connect the micro:bit to your computer using a USB cable.

And enter website

https://www.dropbox.com/sh/w5mv8mvufti0uj/AADTFPTV8NBN0IxQj_3TZ8E

[Ta?dl=0](#) to download the driver file of micro:bit



5. Getting Started with Micro:bit

The following instructions are applied for Windows system but can also serve as a reference if you are using a different system.

5.1 Write code and program

This chapter describes how to write program with the App Micro: Bit and load the program to the Micro: Bit main board V2.

You are recommended to browse the official website of Micro:bit for more details, and the link is attached below:


<https://microbit.org/guide/quick/>

Step 1: connect the Micro: Bit main board V2 with your computer


Firstly, link the Micro: Bit main board V2 with your computer via the USB cable. Macs, PCs, Chromebooks and Linux (including Raspberry Pi) systems are all compatible with the Micro: Bit main board V2.

Note that if you are about to pair the board with your phone or tablet, please refer to this link:

<https://microbit.org/get-started/user-guide/mobile/>

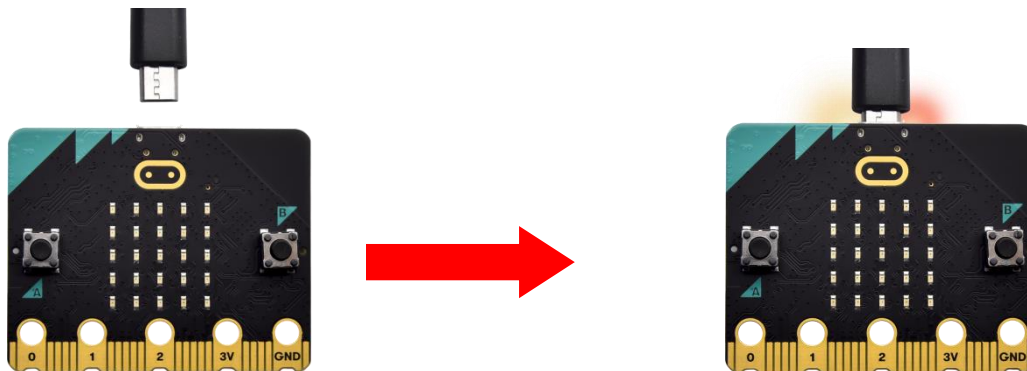

Secondly, if the red LED on the back of the board is on, that means the board is powered. Then Micro: Bit main board V2 will appear on your computer as a driver named 'MICROBIT'. Please note that it is not an ordinary USB disk as shown below.

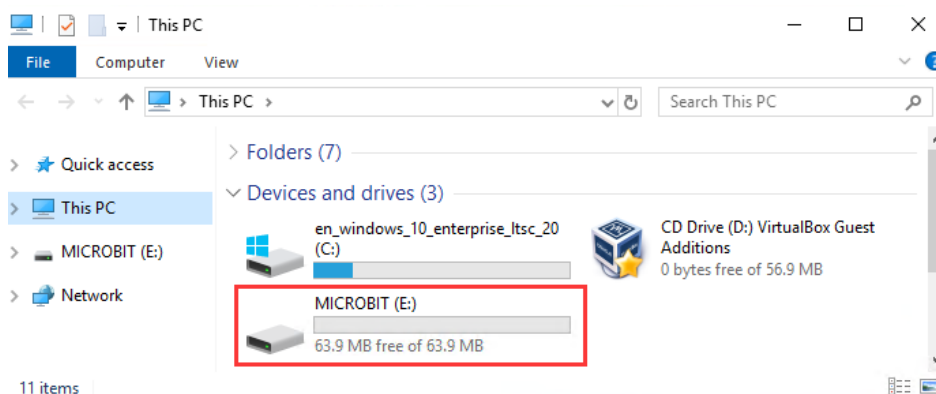


Step 2: write programs


View the link <https://makecode.microbit.org/> in your browser;

Click 'New Project' ;

The dialog box 'Create a Project' appears, fill it with 'heartbeat' and click 'Create ✓' to edit.

(If you are running Windows 10 system, it is also viable to edit on the APP MakeCode for micro:bit , which is exactly like editing in the website. And the link to the APP is <https://www.microsoft.com/zh-cn/p/makecode-for-micro-bit/9pjc7sv48lcx?ocid=badge&rtc=1&activetab=pivot:overviewtab>)

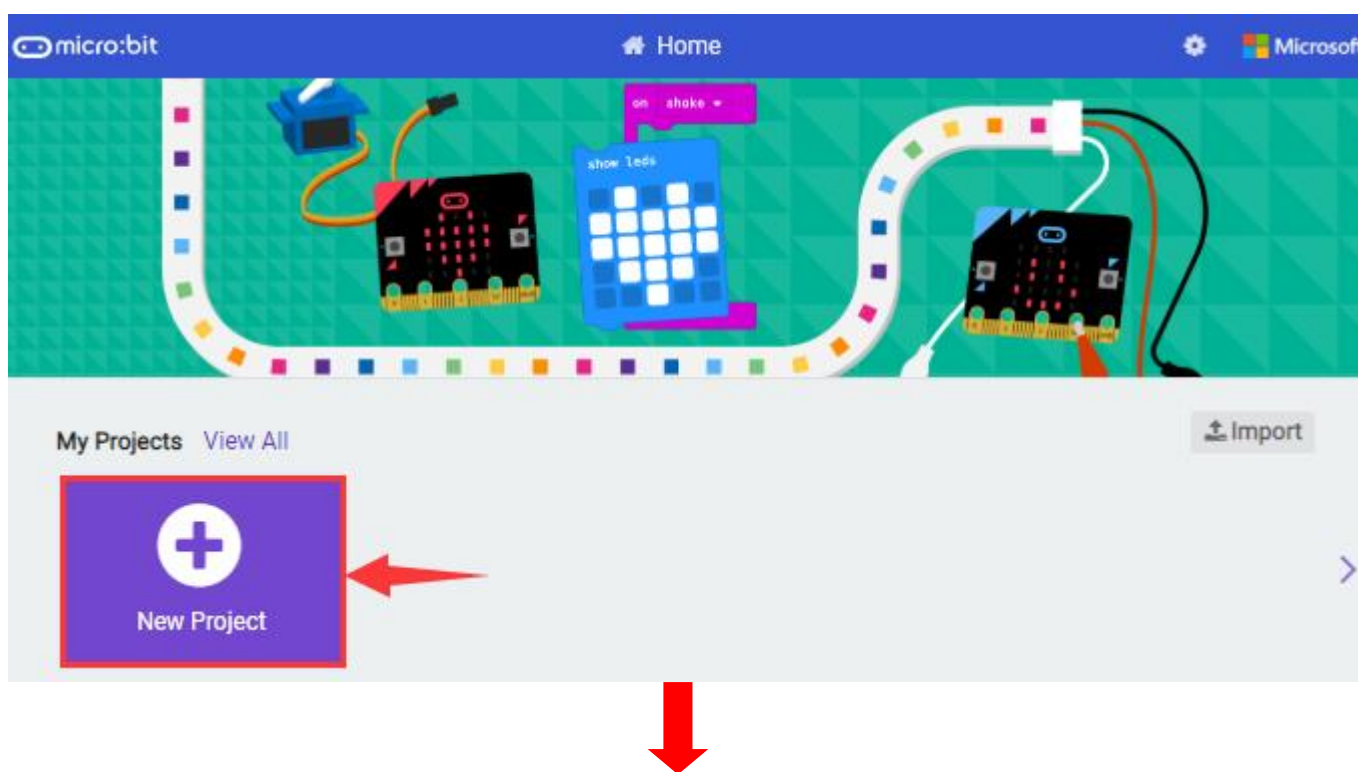


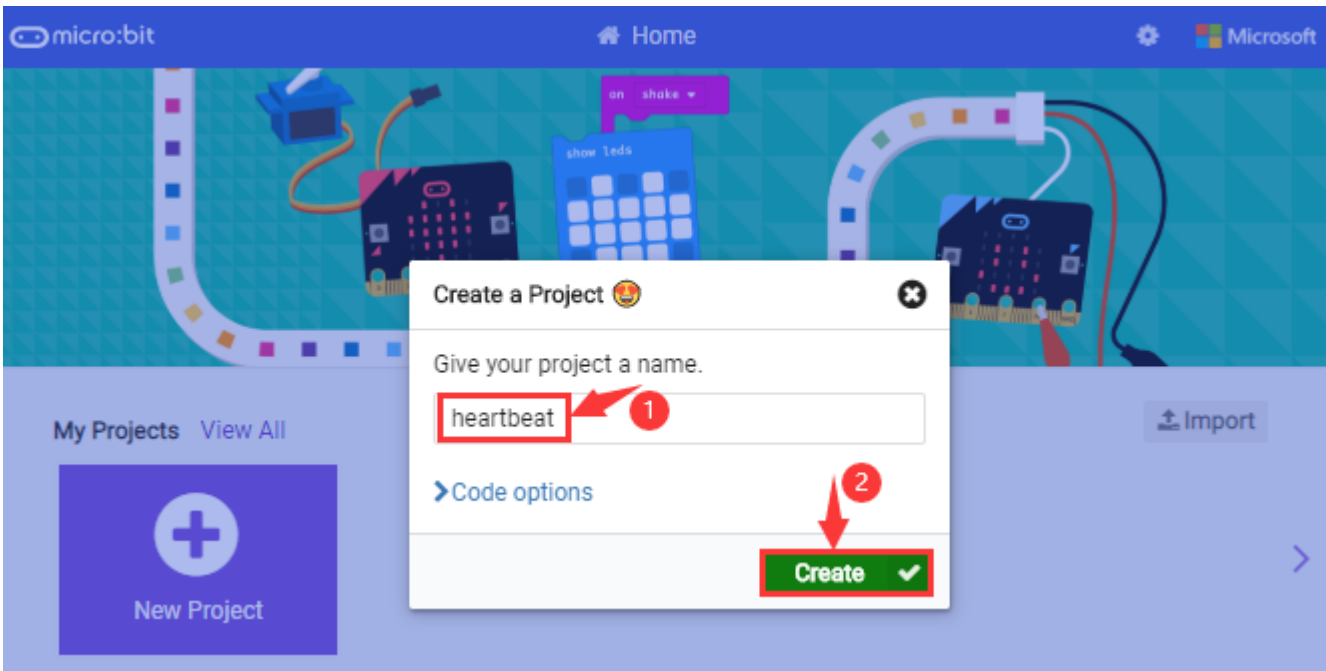

Write a set of micro:bit code. You can drag some modules in the Blocks to the editing area and then run your program in Simulator of MakeCode editor as shown in the picture below which demonstrates how to edit 'heartbeat' program .

As for loading test code , please turn to Chapter 5.5.

And introduction of Makecode is on the next chapter 5.2.

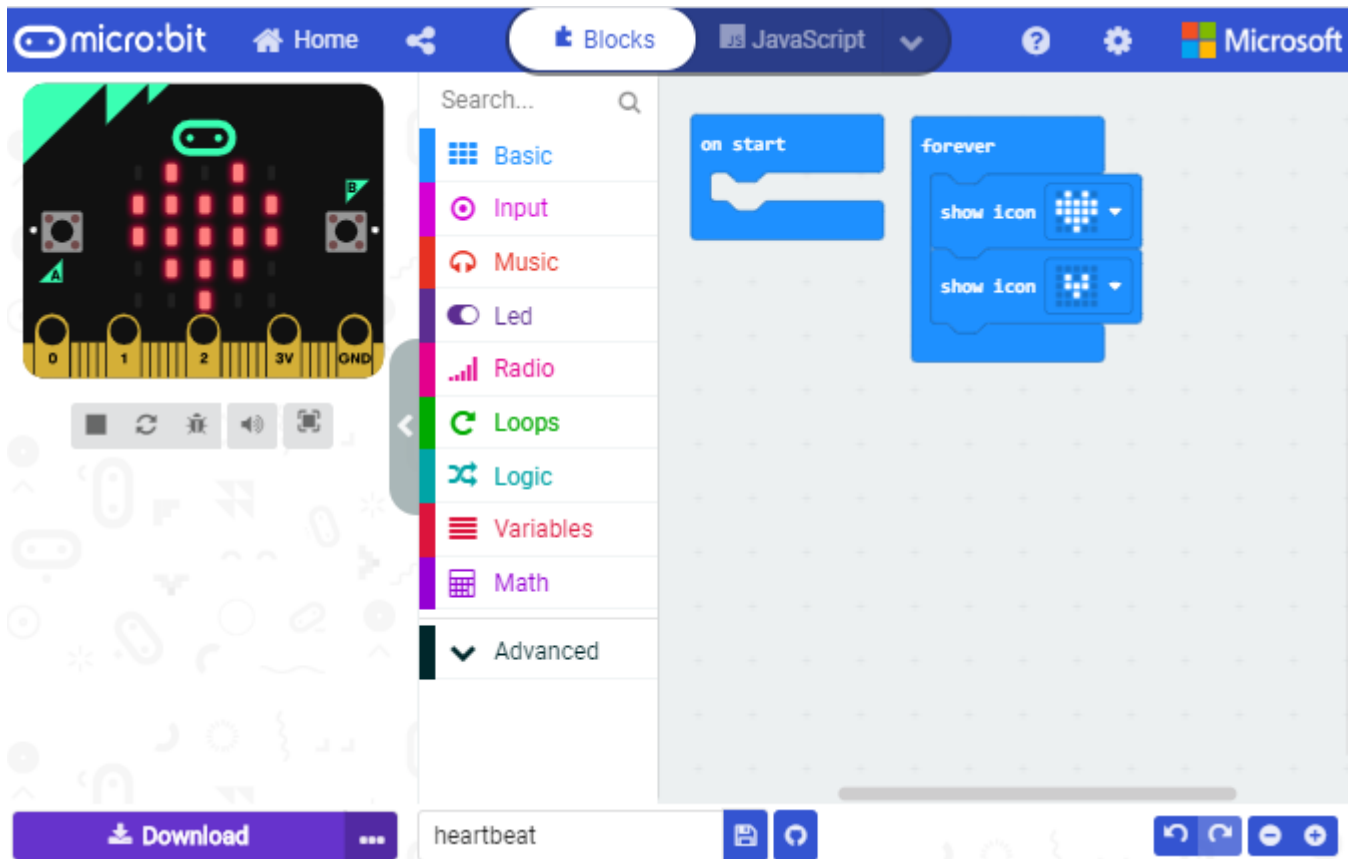


Step 3: download test code


If your computer is Windows 10 and you have downloaded the APP MakeCode for micro:bit to write program, what you will have to do to download the program to your Micro: Bit main board V2 is merely clicking the 'Download' button, then all is done.


If you are writing programs through the website, following these steps:

Click the 'Download' in the editor to download a "hex" file, which is a compact program format that the Micro: Bit main board can read. Once the hexadecimal file is downloaded, copy it to your board V2 just like the process that you copy the file to the USB driver. If you are running Windows system, you can also right-click and select 'Send to → Microbit (E)' to copy the hex file to the Micro: Bit main board V2

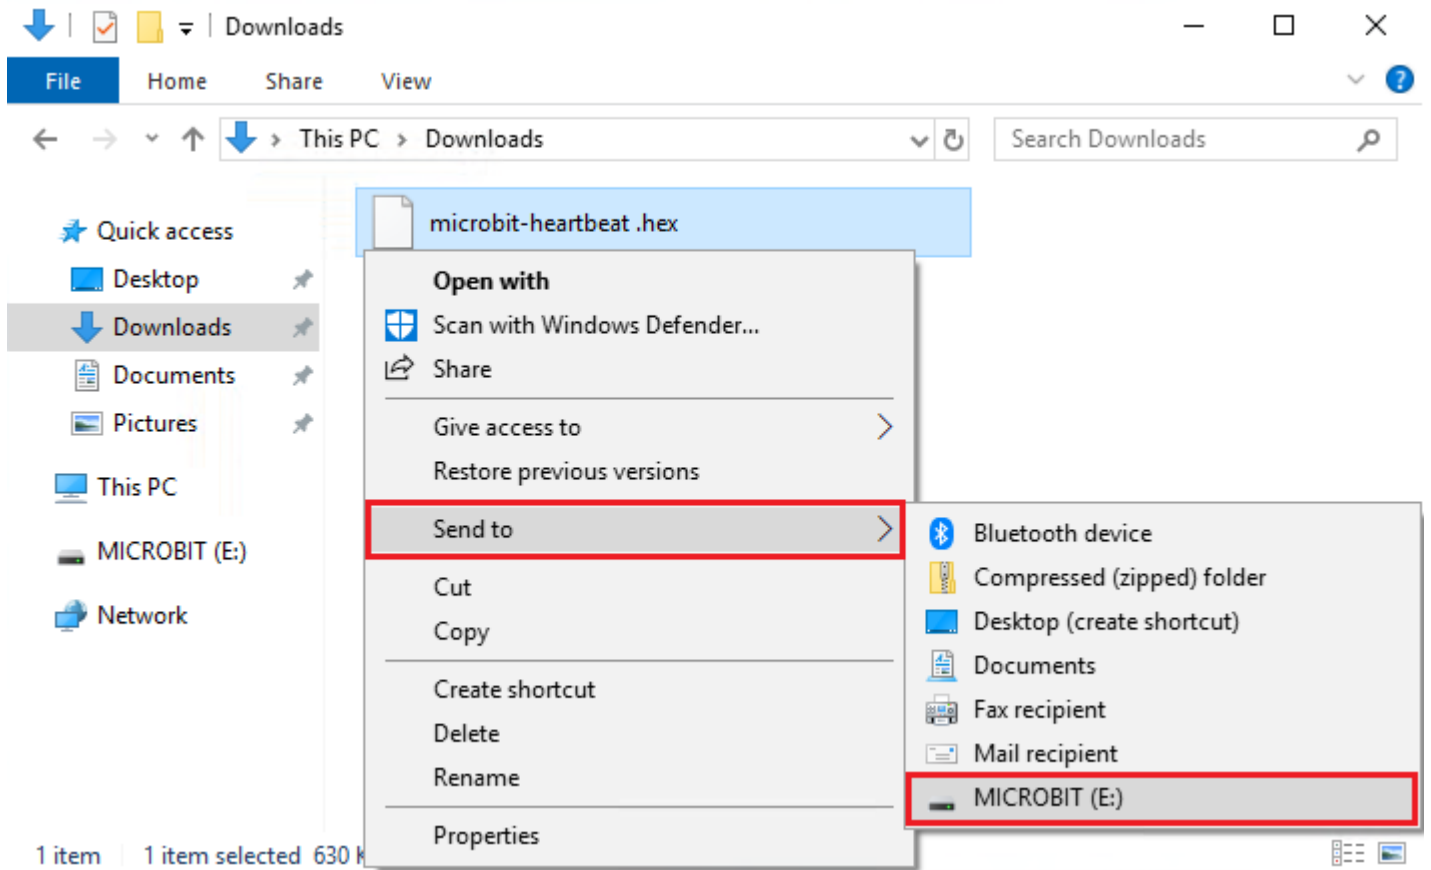

You can also directly drag the "hex" file onto the MICROBIT (E:) disk.

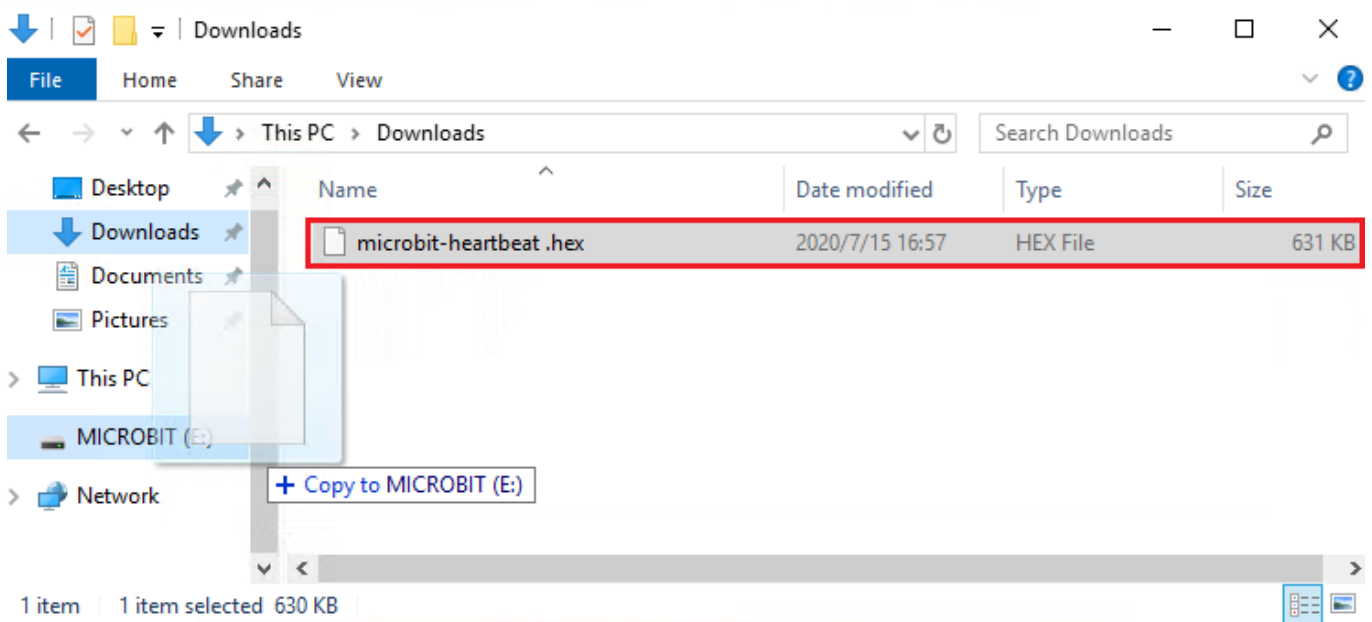


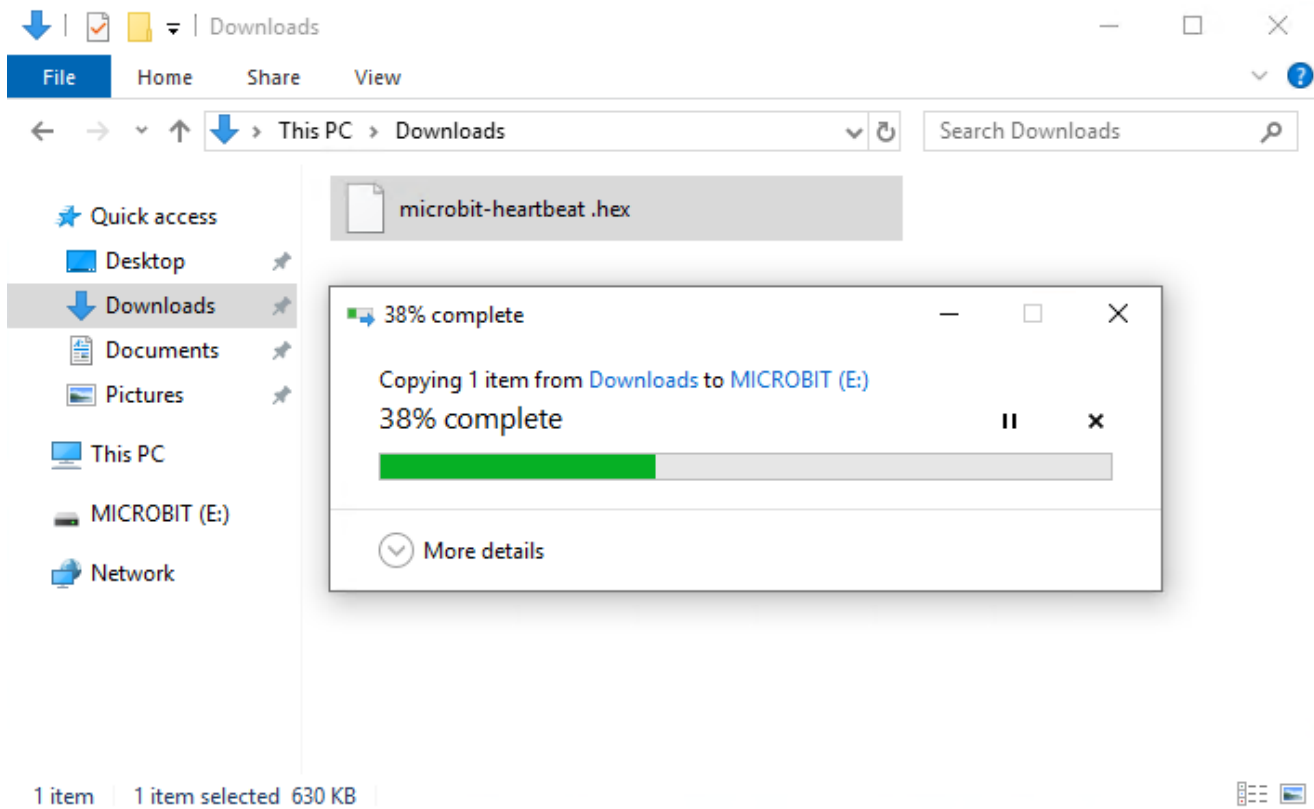


During the process of copying the downloaded hex file to the Micro: Bit main board V2, the yellow signal light on the back side of the board flashes. When the copy is completed, the yellow signal light will stop flashing and remain on.

Step 4: run the program

After the program is uploaded to the Micro: Bit main board V2, you could still power it via the USB cable or change to via an external power. The 5 x 5 LED dot matrix on the board displays the heartbeat pattern.

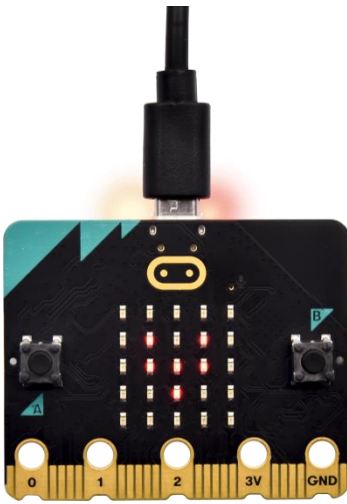

Power via micro USB cable

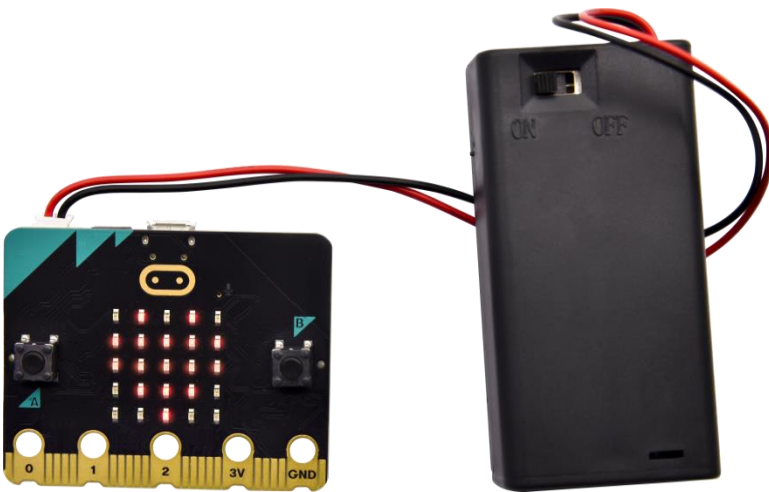

Power via external power (3V)


Step 5: learn about other programming languages

This chapter has described how to use the Micro: Bit main board V2.


But except for the Makecode graphical programming introduced you can also write Micro: Bit programs in other languages. Go to the link: <https://microbit.org/code/> to know about other programming languages , or view the link: <https://microbit.org/projects/>, to find something you want to have a go.

5.2 Makecode:

Browse <https://makecode.microbit.org/> and enter Makecode online editor or open the APP MakeCode for micro:bit of Windows 10.

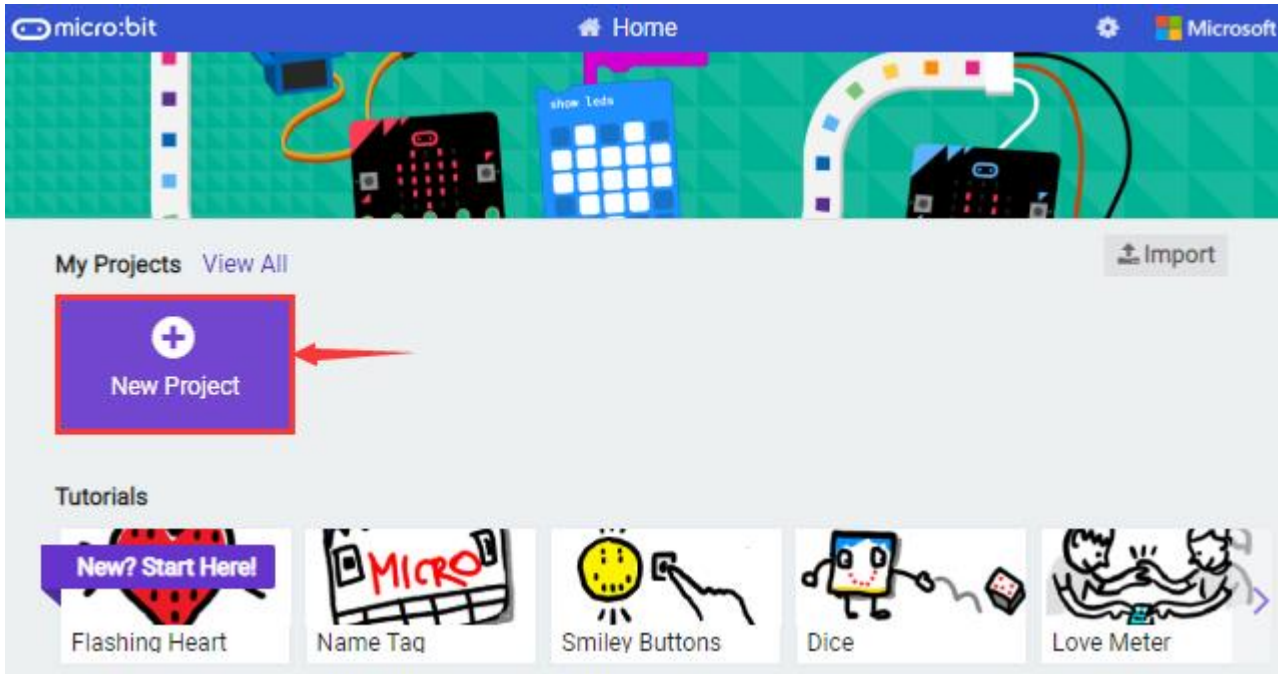

Click "New Project" , and input "heartbeat" , then enter Makecode editor, as shown below:

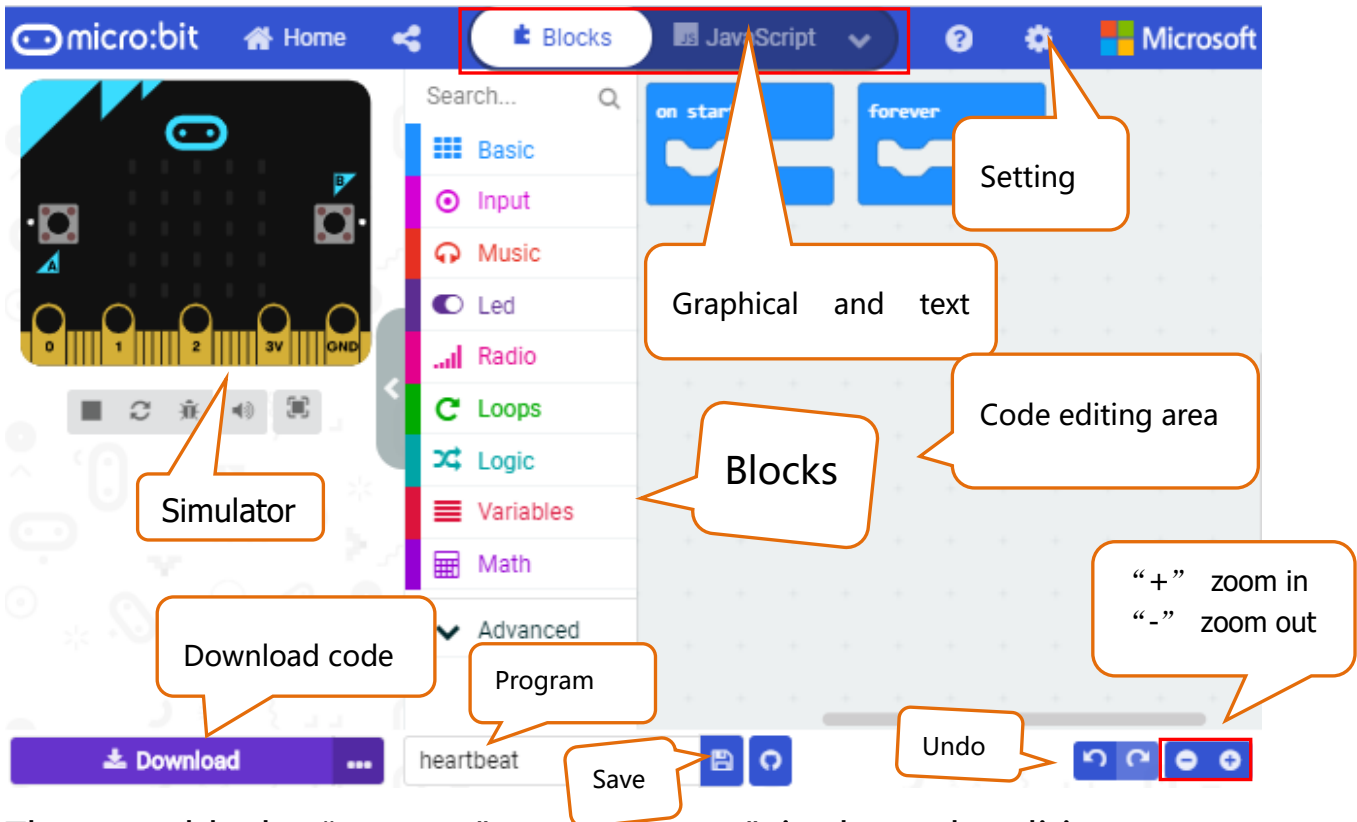

There are blocks "on start" and "forever" in the code editing area.

When the power is plugged or reset, "on start" means that the code in the block only executes once, while "forever" implies that the code runs cyclically.

5.3.Quick Download

As mentioned before, if your computer is Windows 10 and you have downloaded the APP MakeCode for micro:bit to write programs, the program written can be quickly downloaded to the Micro: Bit main board V2 by selecting 'Download' .


While it is a little more trickier if you are using a browser to enter makecode. However, if you use Google Chrome, suitable for Linux, macOS and Windows 10, the process can be quicker too.

We use the webUSB function of Chrome to allow the internet page to access the hardware device connected USB.

You could refer to the following steps to connect and pair devices.

Device pairing:

Connect micro:bit to your computer by USB cable. Click “...” beside “Download” and click “Pair device” .

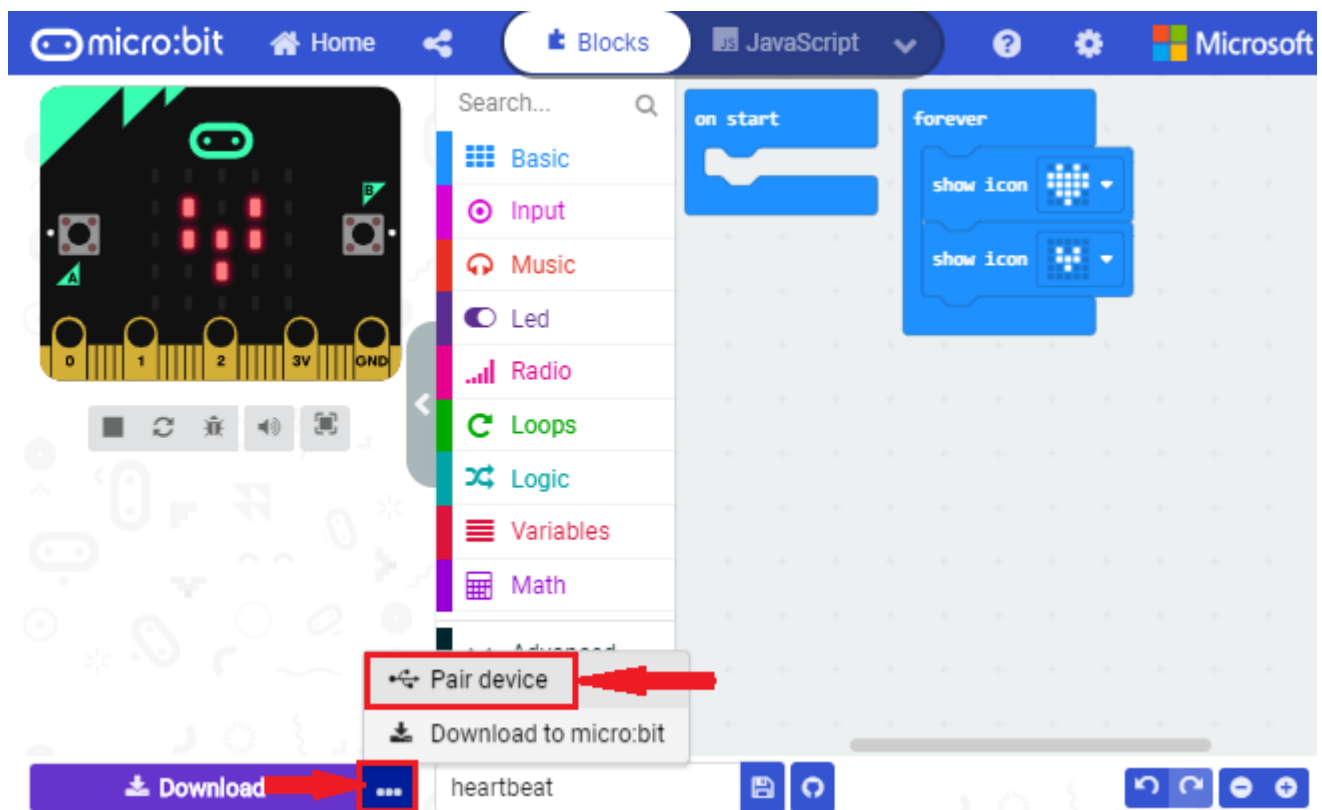

Then click another “Pair device” as shown below.




Then select "BBC micro:bit CMSIS-DPA" and click "Connect". If "BBC micro:bit CMSIS-DPA" does not show up for selection, please refer to <https://makecode.microbit.org/device/usb/webusb/troubleshoot>


We also provide [7. Troubleshooting-WebUSB](#) in the resource link <https://fs.keyestudio.com/KS4009-4010>.

What's more, if you don't know how to update the firmware of micro:bit, refer to the link: <https://microbit.org/guide/firmware/> or browse folder

4. How to Update the Firmware [we provide](#).

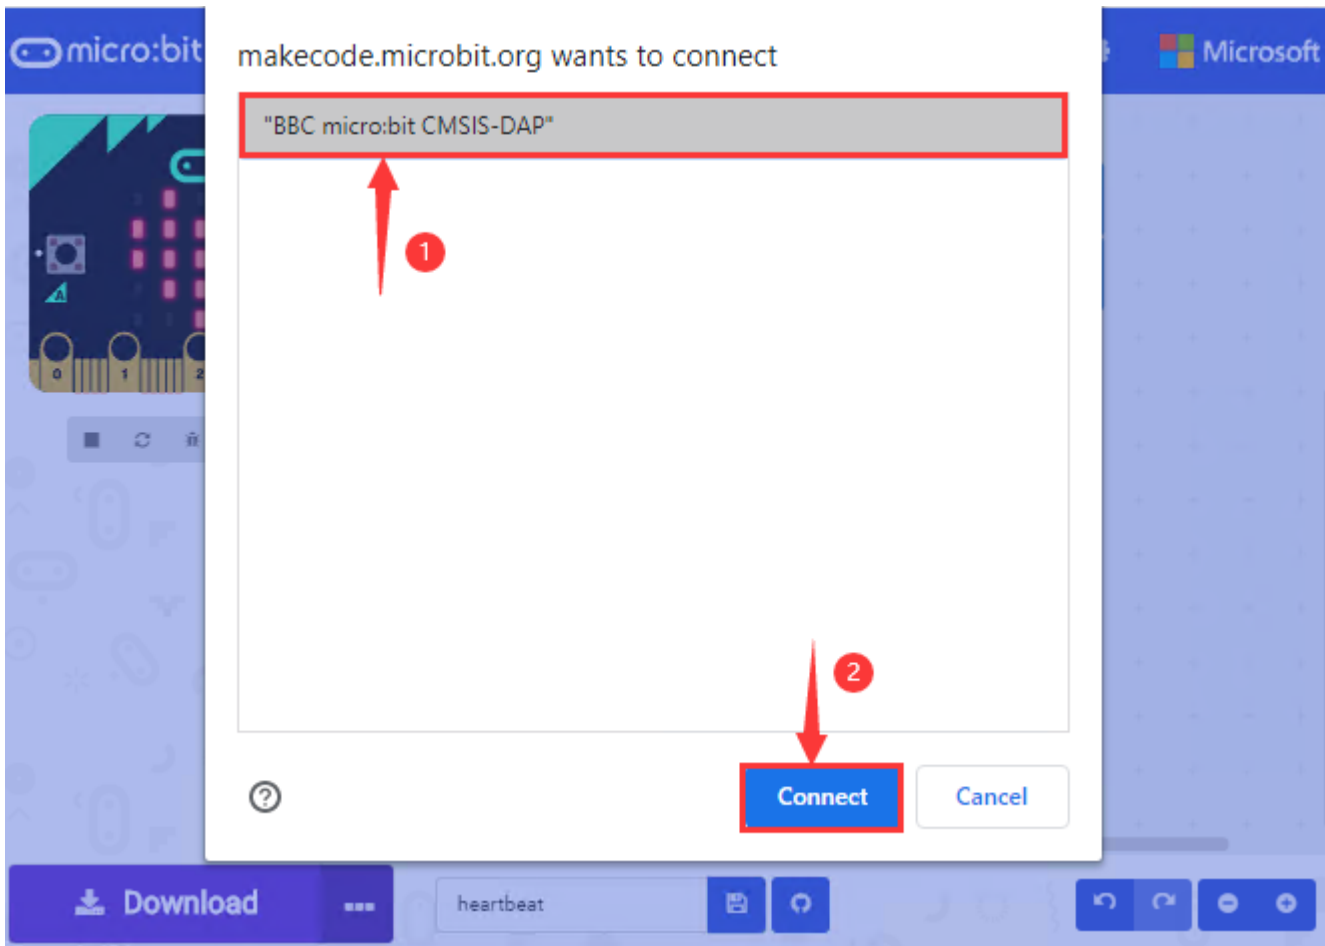

Then click " Download" . The program is directly downloaded to Micro: Bit main board V2 and the sentence "Download completed!" appears.

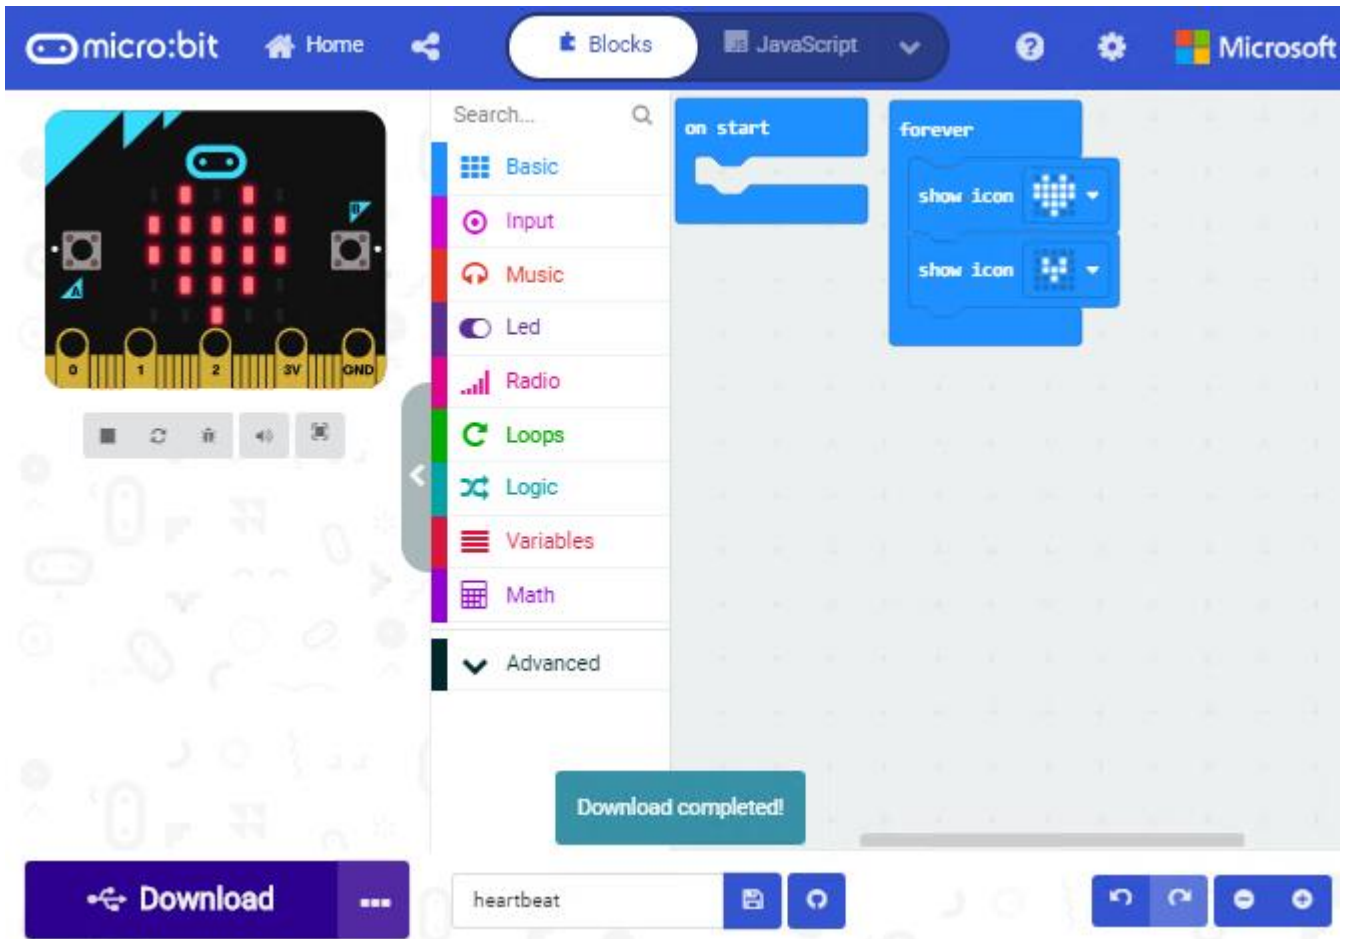


5.4 Resources and test code


Tools ,test code and other resources can be downloaded via the link <https://fs.keyestudio.com/KS4009-4010> and it contains following files:


> V2.0 Microbit


Overview


Upload ▾ | Share | Create ▾ |  Open ▾


Name ↑


 1. About keystudio


 2. Project Code


 3. Tutorial

 4. How to Update the Firmware

 5. Microbit Driver Installation

 6. Troubleshooting-MAINTENANCE Mode

 7. Troubleshooting-WebUSB


 8. Cool Term Download

5.5 Input test code


We provide hexadecimal code files (project files) for each project. The file contains all the contents of the project and can be imported directly, or you can manually drag the code blocks to complete the program for each project. For simple projects, dragging a block of code to complete the program is recommended. For complex projects, it is recommended to conduct the program by importing the hexadecimal code file we provide.

Let's take the "Heatbeat" project as an example to show how to load the code.

Open the Web version of Makecode or the Windows 10 App version of Makecode.


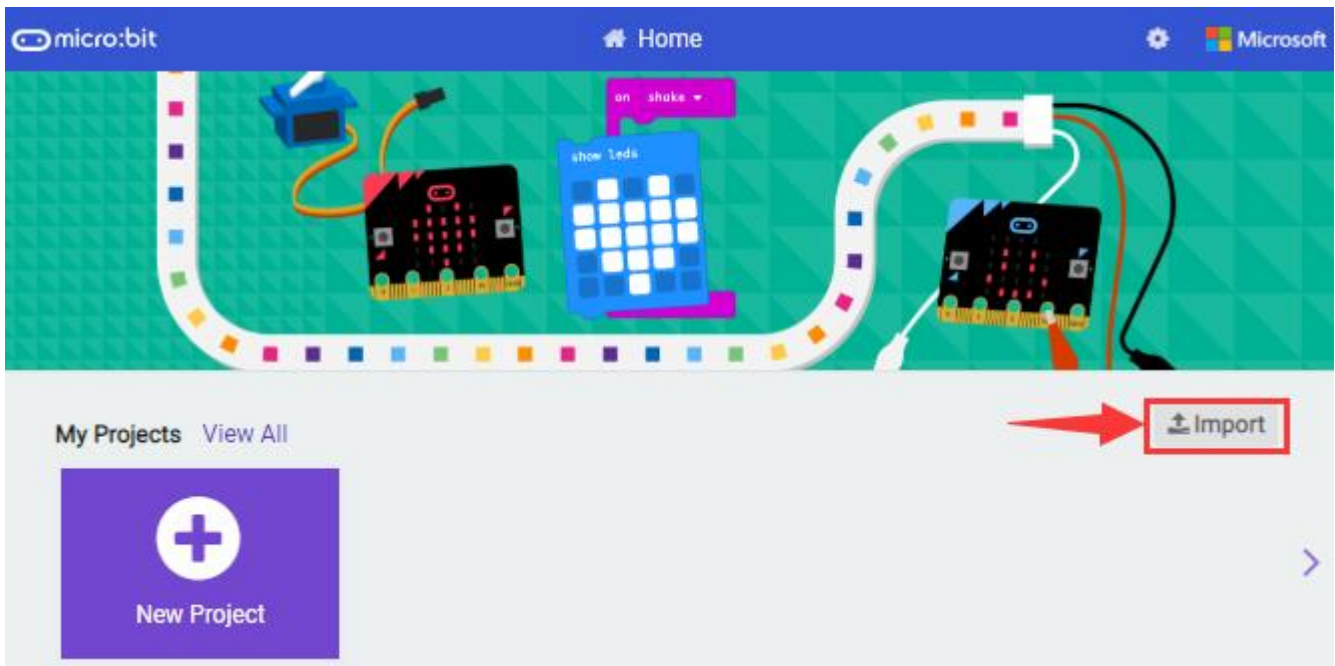


Click "Import File" ;

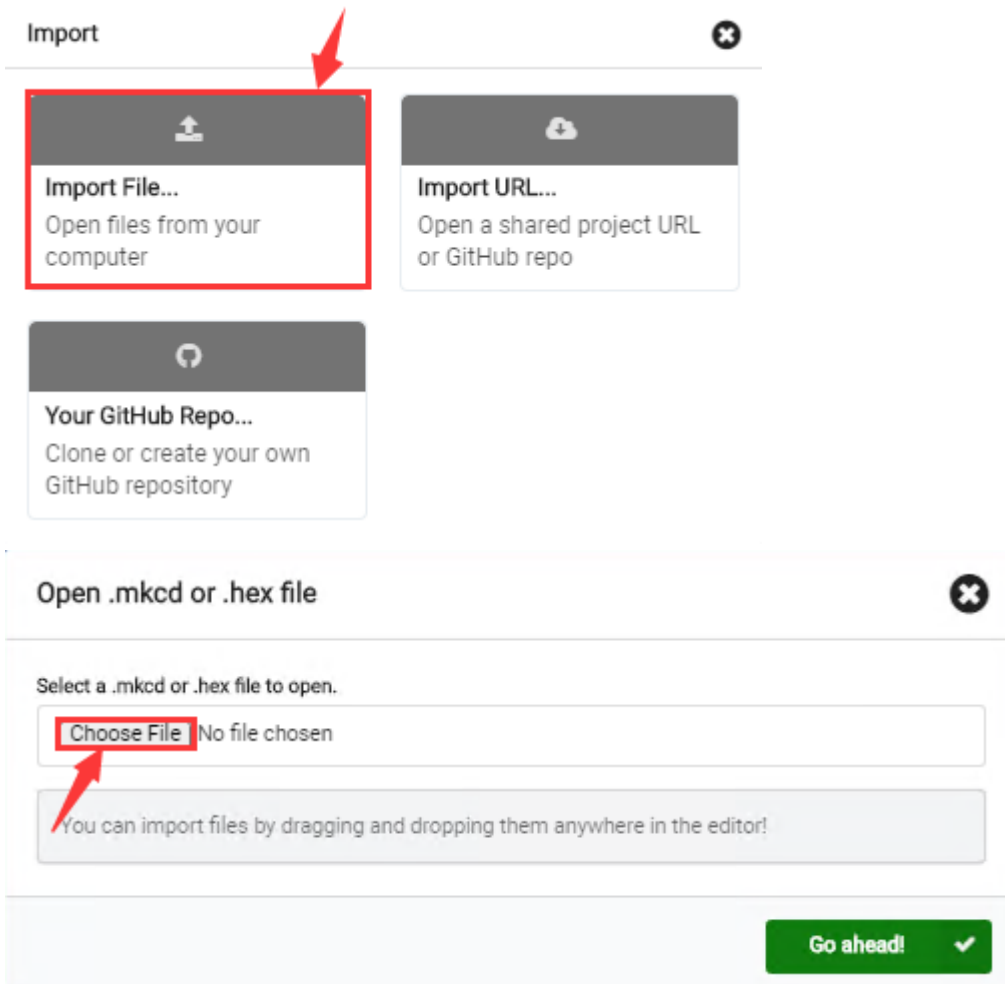


Select " ../Makecode Code/Project 1_ Heart beat/Project 1_ Heart beat.hex" ;


Then click "Go ahead" .

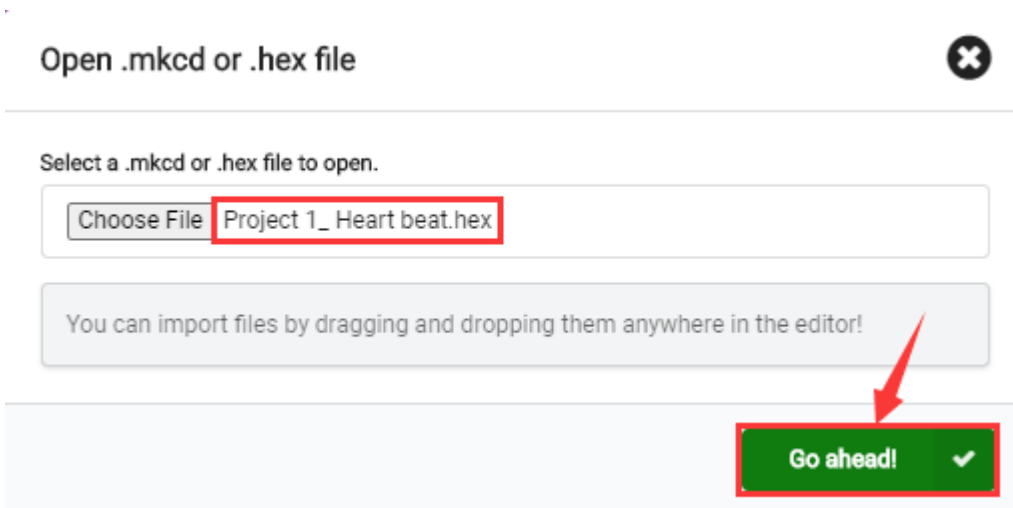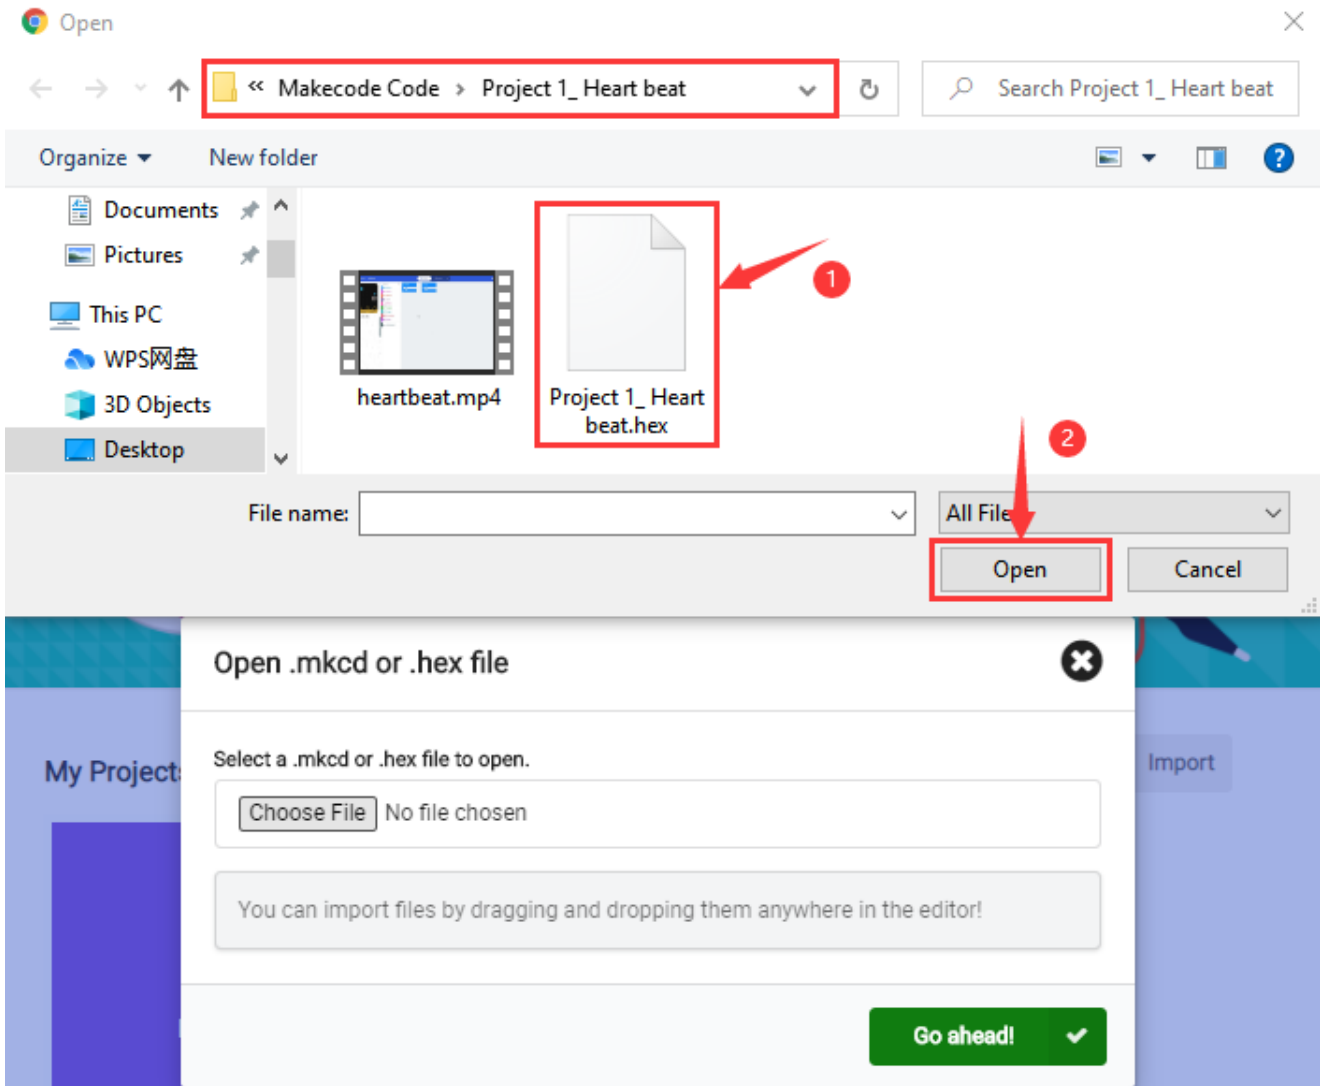

In addition to importing the test code file provided into the Makecode compiler above, you can also drag the the test code file provided into the code editing area of the Makecode compiler, as shown in the figure below:

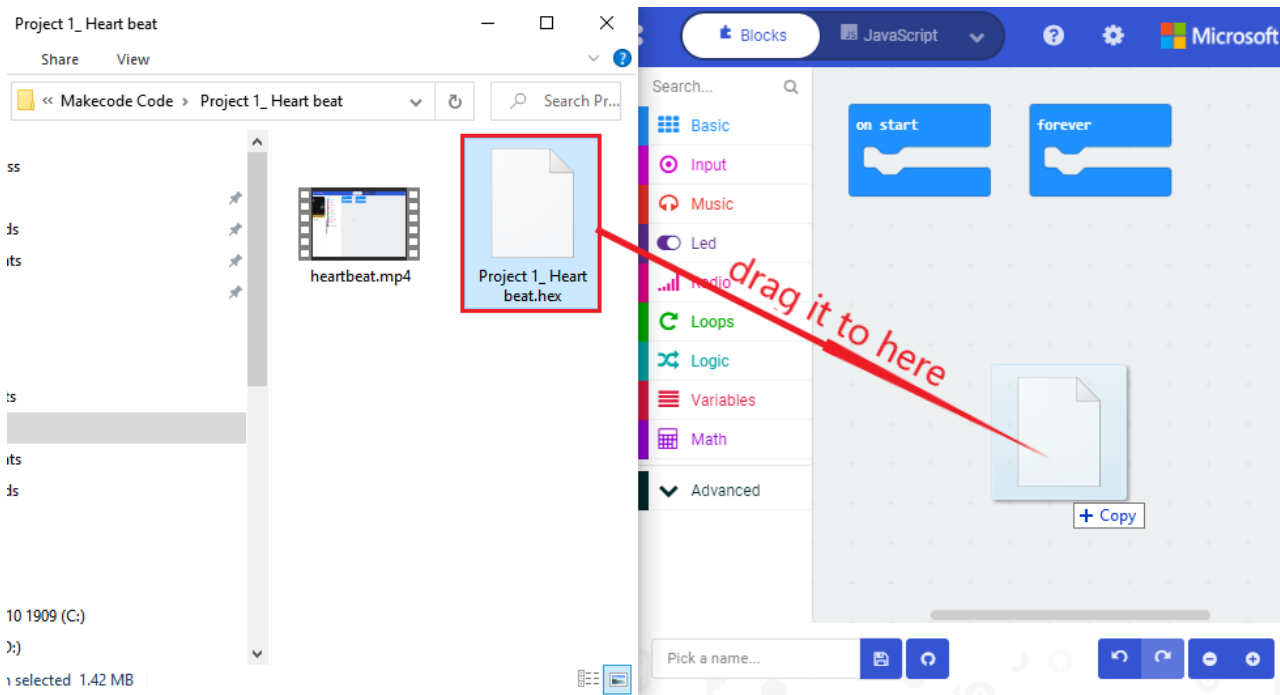

After a few seconds, it is done.

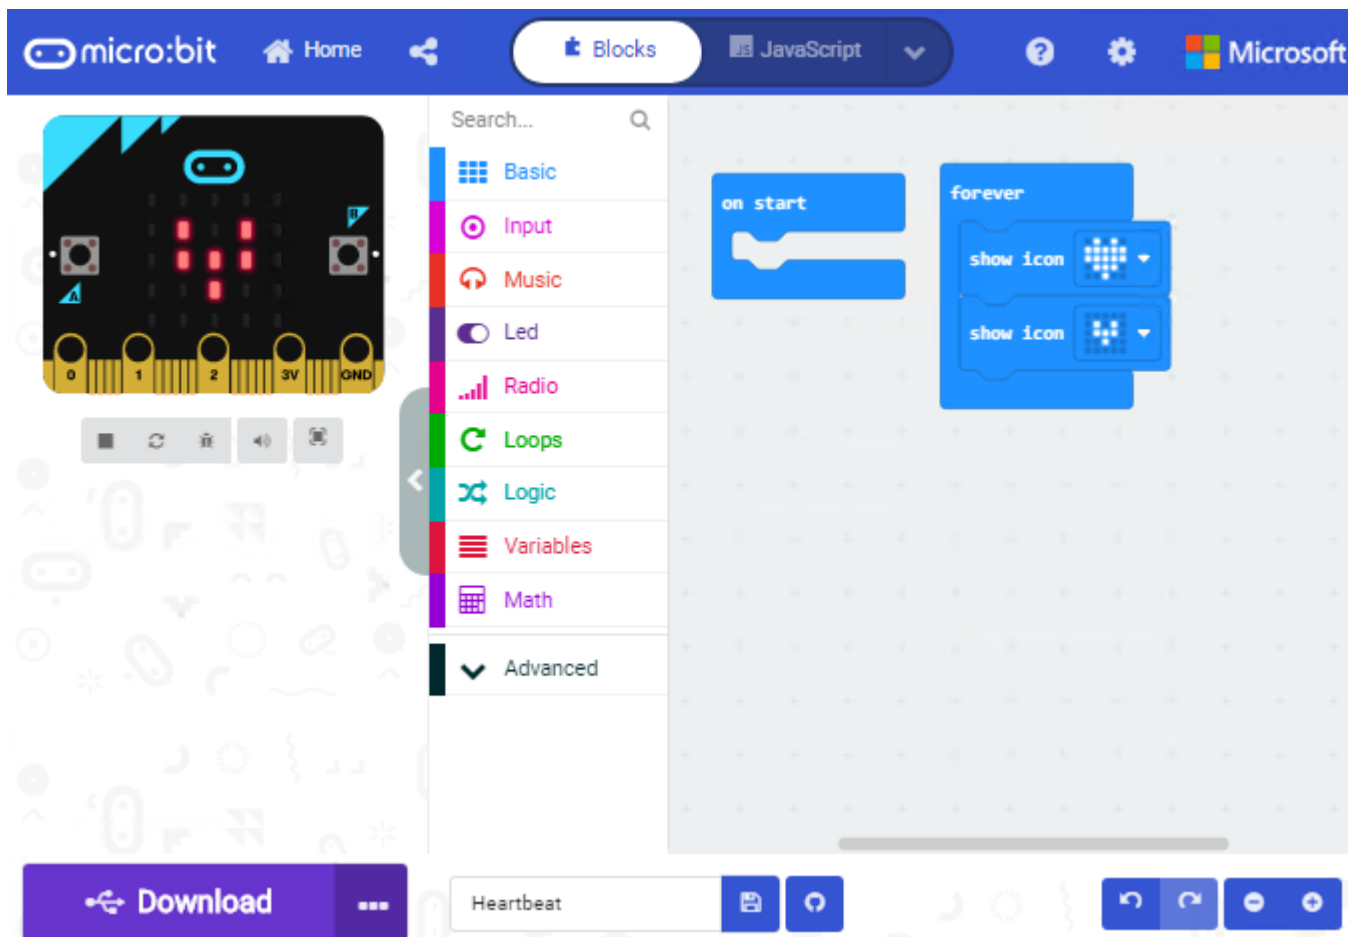

Note: if your computer system is Windows7 or 8 instead of Windows 10, the pairing cannot be done via Google Chrome. Therefore, digital signal or analog

signal of sensors and modules cannot be shown on the serial port simulator. However, you need to read the corresponding digital signal or analog signal. So what can we do? You can use the CoolTerm software to read the serial port data of the micro:bit. Next chapter is about how to install CoolTerm.

5.6 CoolTerm Installation

CoolTerm program is used to read the data on serial port.

Download CoolTerm program:

<https://freeware.the-meiers.org/>

(1) After the download, we need to install **CoolTerm program file**, below is Window system taken as an example.


(2) Choose "win" to download the zip file of CoolTerm

(3) Unzip file and open it. **(also suitable for Mac and Linux system)**








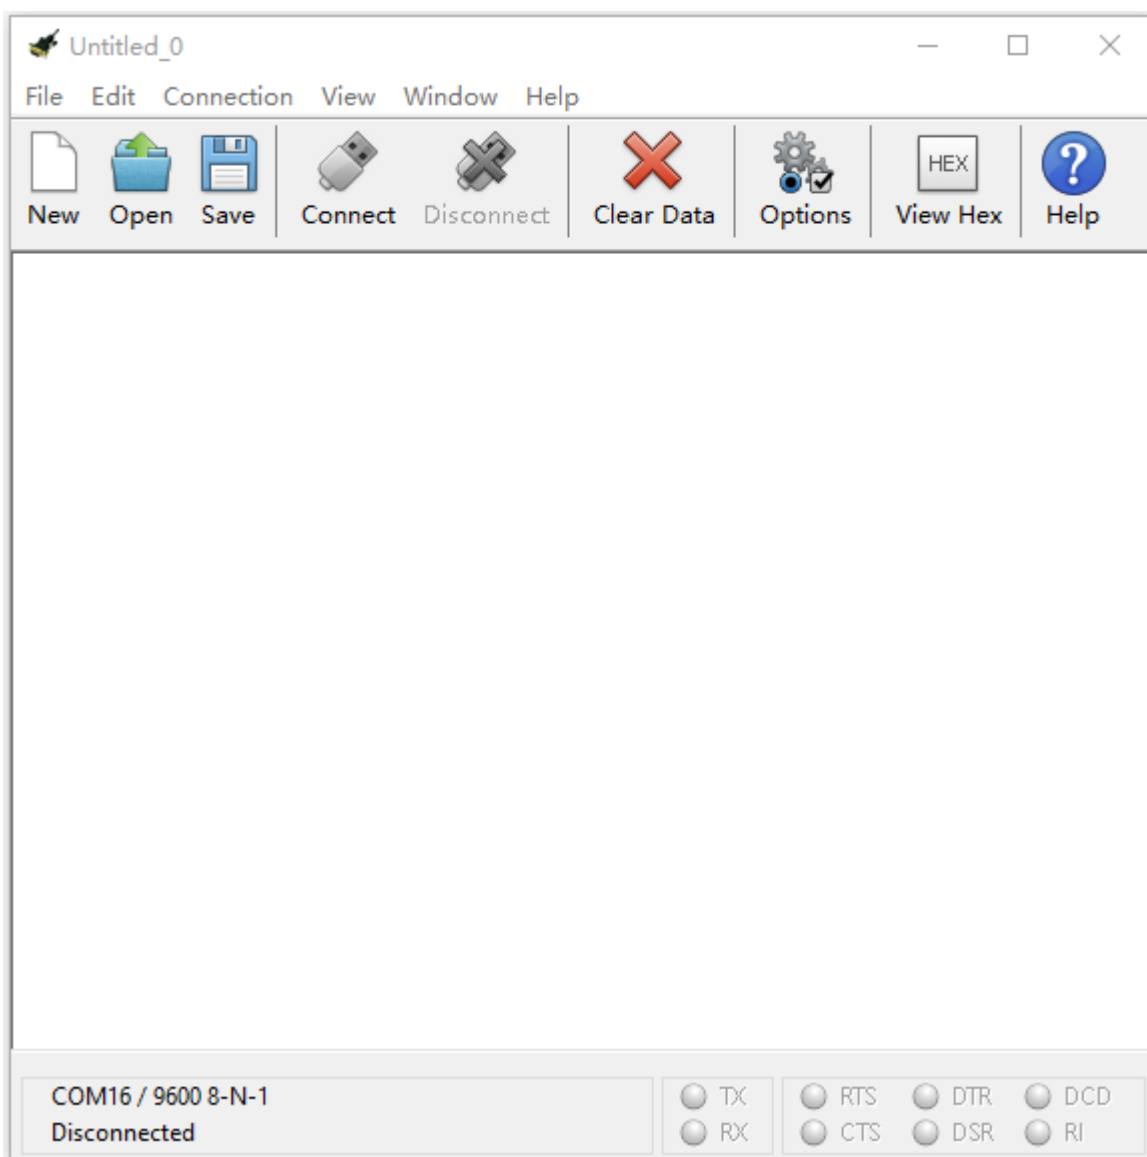

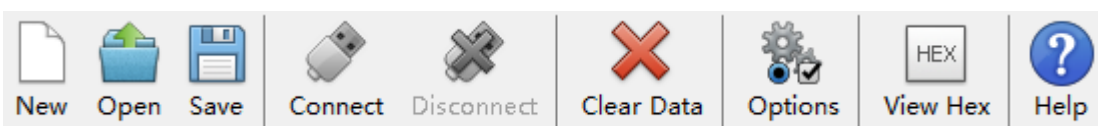


	CoolTerm Libs	2020/4/21 11:20	File folder	
	CoolTerm Resources	2020/4/21 11:20	File folder	
	CoolTerm.exe	2019/5/17 22:56	Application	5,314 KB
	msvcp120.dll	2019/4/3 14:33	Application extension	645 KB
	msvcp140.dll	2019/4/3 14:33	Application extension	625 KB
	msvcr120.dll	2019/4/3 14:33	Application extension	941 KB
	ReadMe.txt	2019/5/18 20:35	Text Document	31 KB
	vccorlib140.dll	2019/4/3 14:33	Application extension	387 KB
	vcruntime140.dll	2019/4/3 14:33	Application extension	88 KB
	Windows System Requirements.txt	2018/1/7 14:29	Text Document	1 KB
	XojoGUIFramework64.dll	2019/4/3 14:33	Application extension	30,801 KB

(2) Double-click CoolTerm.exe .



The functions of each button on the Toolbar are listed below:




 <p>New</p>	<p>Opens up a new Terminal</p>
 <p>Open</p>	<p>Opens a saved Connection</p>
 <p>Save</p>	<p>Saves the current Connection to disk</p>
 <p>Connect</p>	<p>Opens the Serial Connection</p>
 <p>Disconnect</p>	<p>Closes the Serial Connection</p>
 <p>Clear Data</p>	<p>Clears the Received Data</p>
 <p>Options</p>	<p>Opens the Connection Options Dialog</p>
 <p>View Hex</p>	<p>Displays the Terminal Data in Hexadecimal Format</p>
 <p>Help</p>	<p>Displays the Help Window</p>

6. Projects

(Note: project 1 to 12 will be conducted with the built-in sensors and LED dot matrix of the Micro:bit main board V2)

Project 1: Heartbeat

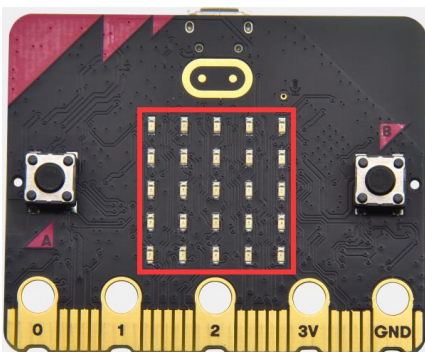

(1)Project Description

This project is easy to conduct with a micro:bit V2 main board, a Micro USB cable and a computer. The micro:bit LED dot matrix will display a relatively big heart-shaped pattern and then a smaller one. This alternative change of this pattern is like heart beating. This experiment serves as a starter for your entry to the programming world.

(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code:

Attach the Micro:bit main board V2 to your computer via the Micro USB cable and begin editing.

Firstly, click" basic" module and find and drag the block "show icon



" to module "forever" ;



Secondly, click" basic" module again and find and drag the block "show icon



" to module "forever" and click the little triangle to select "show icon



" ;




Thirdly, click" basic" module and find and drag the block"




" to the code block and click the littler triangle to select 500;

Complete Program:

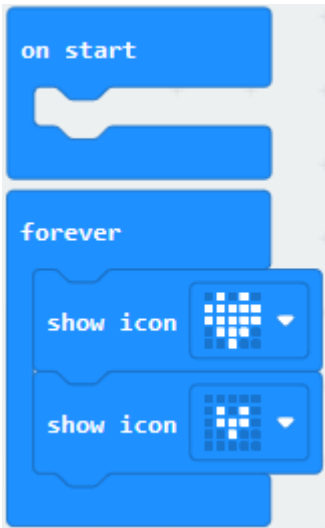

Note:the “on start” means that blocks in the code are only executed once, “forever” implies that code will run cyclically.

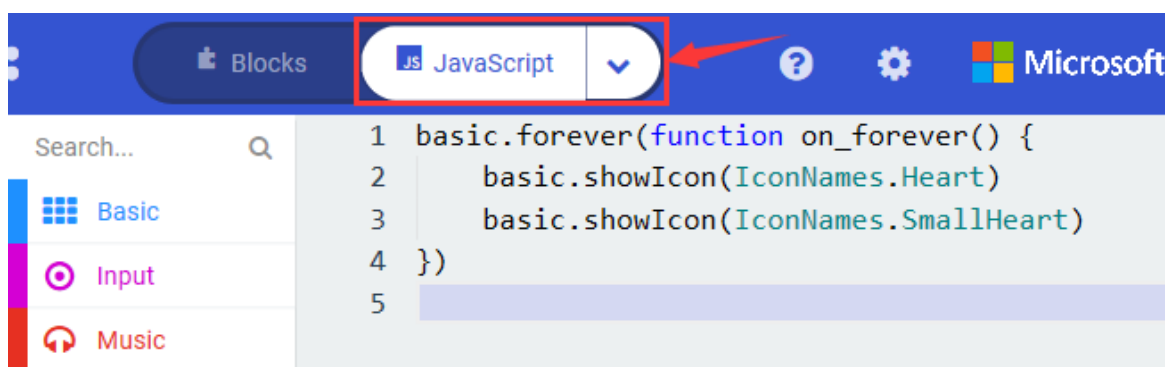

Click” JS JavaScript” , you will find the corresponding programming languages.



Click the little triangle” of JS JavaScript” to choose “Python” , you will find the corresponding Python programming languages.




(4)Test Results:

After uploading test code to micro:bit main board V2 and keeping the connection with the computer to power the main board, the LED dot matrix shows pattern “” and then “” alternatively.

(Please refer to chapter 5.3 to know how to download test code quickly.)

If the downloading is not smooth, please remove the micro USB from the main board and then reconnect them and reopen Makecode to try again.


Project 2: Light A Single LED

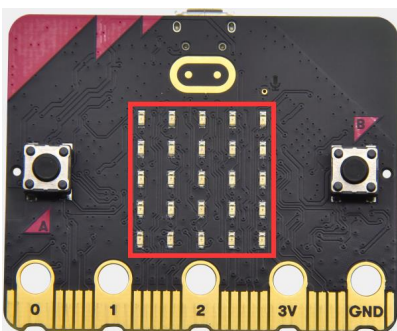

(1)Project Description:

The LED dot matrix consists of 25 LEDs arranged in a 5 by 5 square. In order to locate these LEDs quickly, as the figure shown below, we can regarded this matrix as a coordinate system and create two axes by marking those in rows

from 0 to 4 from top to bottom, and the ones in columns from 0 to 4 from the left to the right. Therefore, the LED sat in the second of the first line is (1,0) and the LED positioned in the fifth of the fourth column is (3,4) and others likewise.

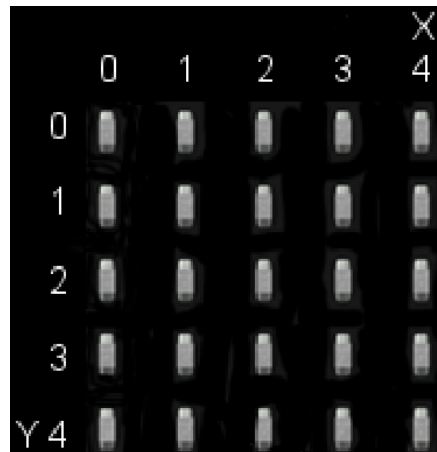


(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1


(3)Test Code:

Attach the Micro:bit main board V2 to your computer via the Micro USB cable and begin editing.

Firstly, click" Led" module and then the" more" module to find and drag the block "led enable false " to block "on start" ; click the little triangle of "led enable false " to select" true" ;

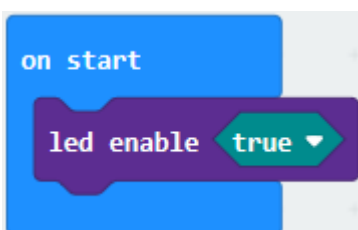


Secondly, click "Led" module and to find and drag the block "toggle x 0 y 0" to block "forever" and alter "x0" to "x1" ;

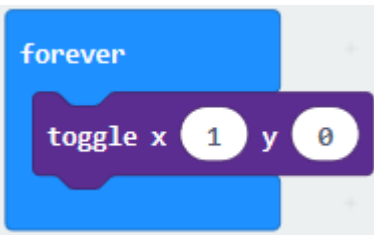

Thirdly, click "Basic" module to find and drag the block "pause(ms)100" to "forever" block and set pause to 500;




Fourthly, copy the block



and place it into forever" block;



Fifthly, click "Led" module to find and drag the block "plot x 0 y 0" to "forever" block and change the "x 0 y 0" to "x 3 y 4" ;

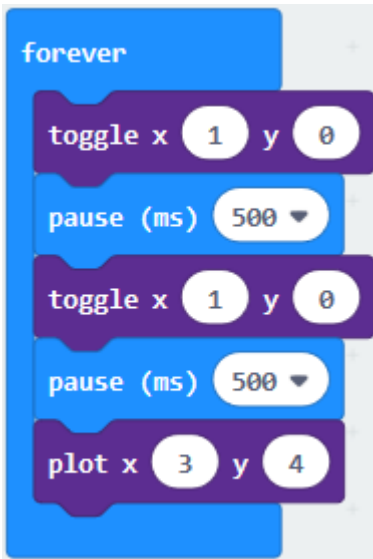


Sixthly, copy the block "pause(ms)500" and place it into "forever" block;



Lastly, click "Led" module to find and drag the block "unplot x 0 y 0" to "forever" block and change "x 0 y 0" to "x 3 y 4" ;and copy and place the block "pause(ms)500" to block "forever" ;


Complete Program:

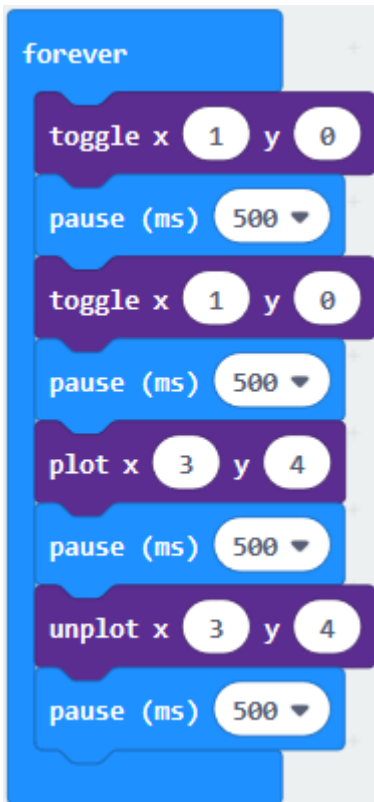

Click "JS JavaScript", you will find the corresponding programming languages.




Click the little triangle” of JS JavaScript” to choose “Python” , you will find the corresponding Python programming languages.

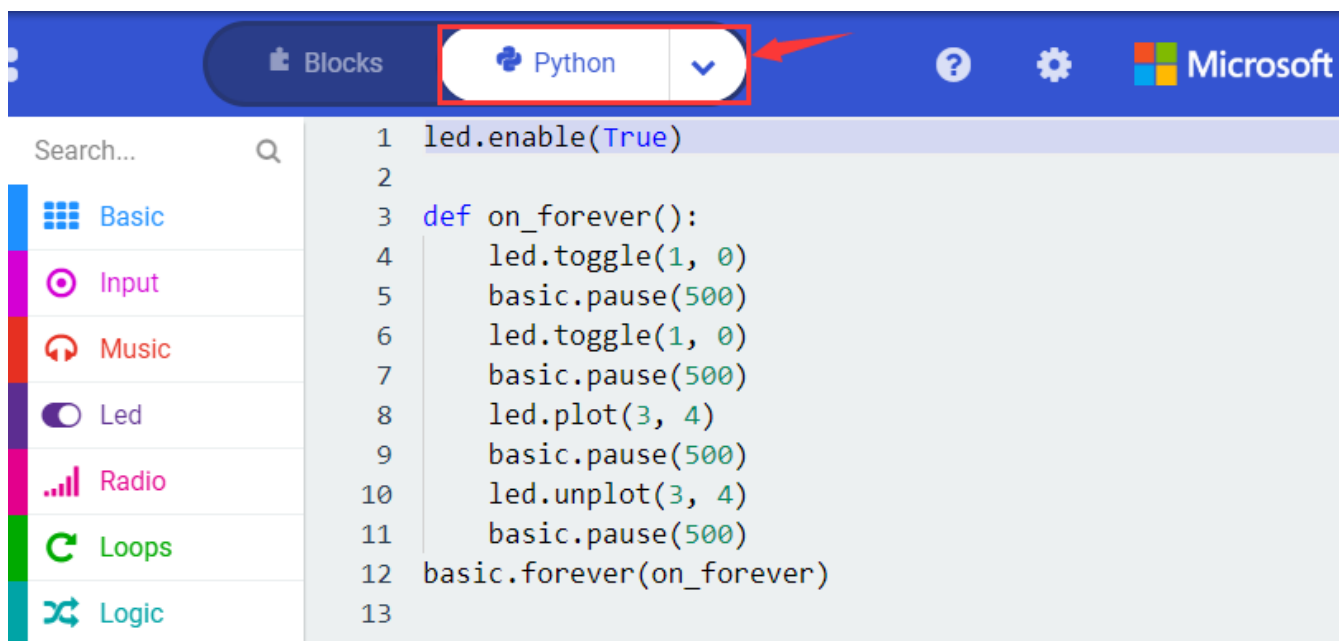

(4)Test Results

After uploading test code to micro:bit main board V2 and powering the main board via the USB cable, the LED in (1,0) lights up for 0.5s and the one in (3,4) shines for 0.5s and repeat this sequence.

Project 3: LED Dot Matrix

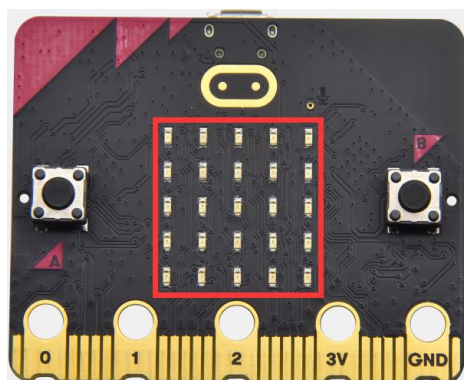

(1)Project Description:

Dot matrices are very commonplace in daily life. They have found wild applications in LED advertisement screens, elevator floor display, bus stop announcement and so on.

The LED dot matrix of Micro: Bit main board V2 contains 25 LEDs in a grid. Previously, we have succeeded in controlling a certain LED to light by integrating its position value into the test code. Supported by the same theory, we can turn on many LEDs at the same time to showcase patterns, digits and characters.

What' s more, we can also click" show icon " to choose the pattern we like to display. Last but not the least, we can our design patterns buy ourselves.


(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code 1:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor.


(1) A. Enter "Led" → "more" → "led enable false"

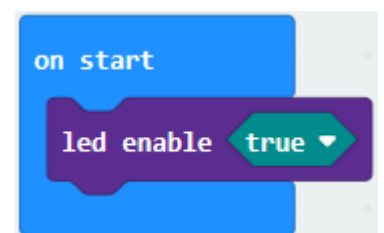


B. Click the drop-down triangle button to select "true"

C. Combine it with "on start" block

(2) Click "Led" to move "plot x 0 y 0" into "forever" , then replicate "plot x 0 y 0" for 8 times, respectively set to "x 2" y 0" , "x 2" y 1" , "x 2" y 2" , "x 2" y 3" , "x 2" y 4" , "x 1" y 3" "x 0" y 2" , "x 3" y 3" , "x 4" y 2" .

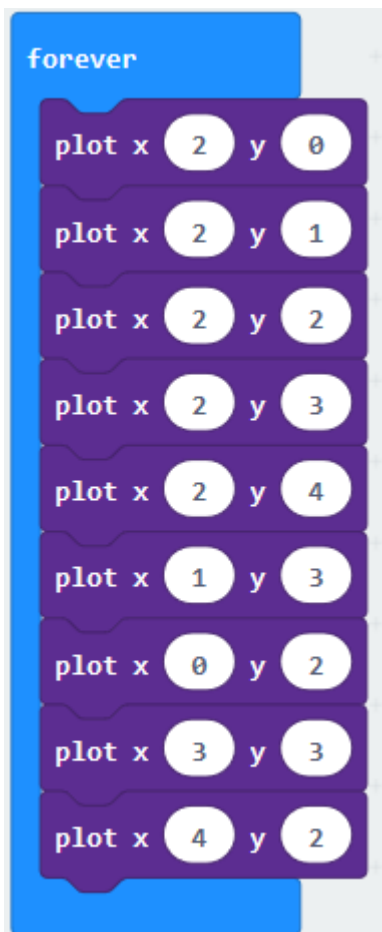

Complete Program:

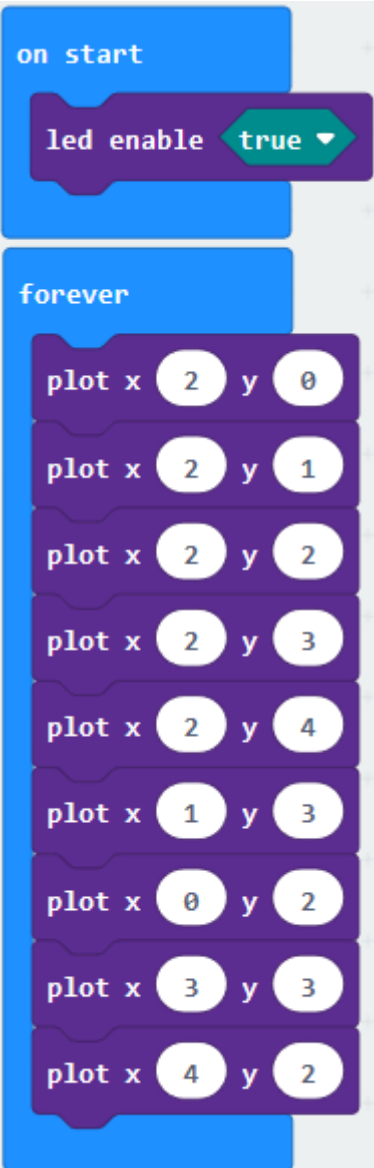

The image shows a Scratch script with the following blocks:

- on start** (blue command block):
 - led enable** (purple block) with a dropdown menu set to **true**.
- forever** (blue loop block) containing a stack of **plot x** (purple) blocks with the following coordinates:
 - plot x 2 y 0
 - plot x 2 y 1
 - plot x 2 y 2
 - plot x 2 y 3
 - plot x 2 y 4
 - plot x 1 y 3
 - plot x 0 y 2
 - plot x 3 y 3
 - plot x 4 y 2

“on start” : command block only runs once to start program.

Turn on LED dot matrix.

The program under the block “forever” runs cyclically.

Toggle the LED brightness at coordinate point “x 2, y 0” , “x 2, y 1” , “x 2, y 2” , “x 2, y 3” , “x 2, y 4” , “x 1, y 3” , “x 0, y 2” , “x 3, y 3” and “x 4, y 2”

Select “ JavaScript” and “Python” to switch into JavaScript and Python language code:

```
Blocks JavaScript ? ⚙ Microsoft
1 led.enable(true)
2 basic.forever(function () {
3     led.plot(2, 0)
4     led.plot(2, 1)
5     led.plot(2, 2)
6     led.plot(2, 3)
7     led.plot(2, 4)
8     led.plot(1, 3)
9     led.plot(0, 2)
10    led.plot(3, 3)
11    led.plot(4, 2)
12 })
13
```

```
Blocks Python ? ⚙ Microsoft
1 led.enable(True)
2
3 def on_forever():
4     led.plot(2, 0)
5     led.plot(2, 1)
6     led.plot(2, 2)
7     led.plot(2, 3)
8     led.plot(2, 4)
9     led.plot(1, 3)
10    led.plot(0, 2)
11    led.plot(3, 3)
12    led.plot(4, 2)
13 basic.forever(on_forever)
14
```

(4)Test Results 1:

Upload code 1 and power on , we will see the




icon

(5) Test Code 2:


Link computer with micro:bit board by micro USB cable, and program in MakeCode editor.

(1) A. Enter "Basic" → "show number 0" block,


B. Duplicate it for 4 times, then separately set to "show number 1" , "show number 2" , "show number 3" , "show number 4" , "show number 5" .

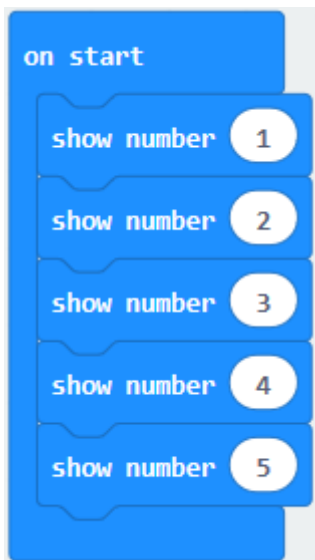


(2) Click "Basic" → "show leds" , then put it into "forever" block, tick blue boxes to light LED and generate "↓" pattern.

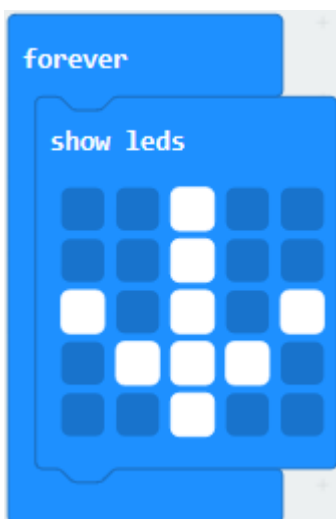

(3) Move out the block "show string" from "Basic" block, and leave it beneath the "show leds" block

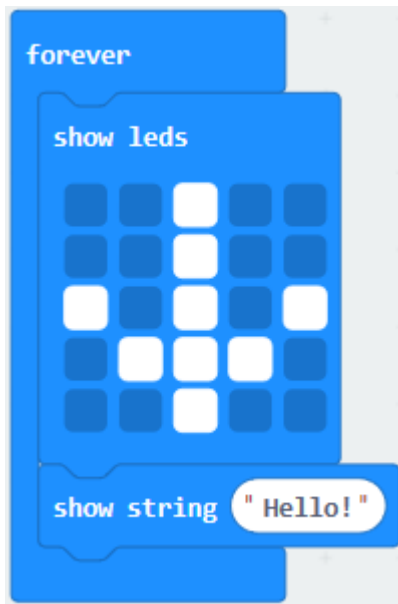


Choose "show icon" from "Basic" block, and leave it beneath the block "show string "Hello!" block

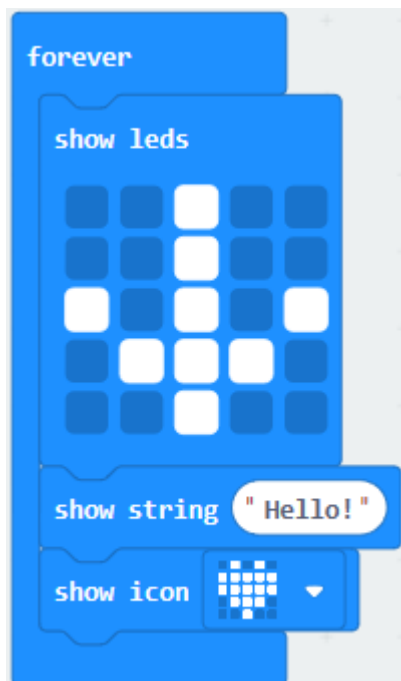


(4) A. Enter "Basic" → "show arrow North" ;

B. Leave it into "forever" block, replicate "show arrow North" for 3 times, respectively set to "North East", "South East", "South West", "North West".

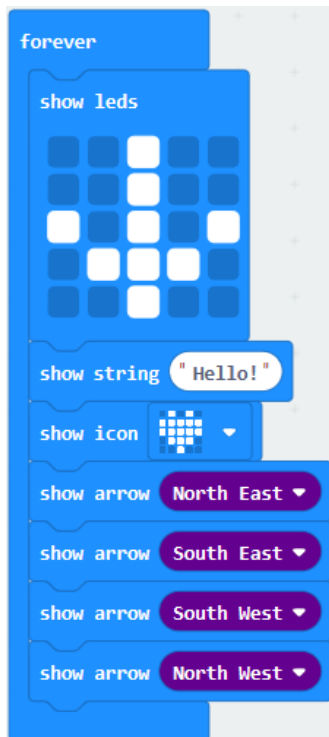


(5) Click "Basic" to get block "clear screen" then remain it below the block "show arrow North West"

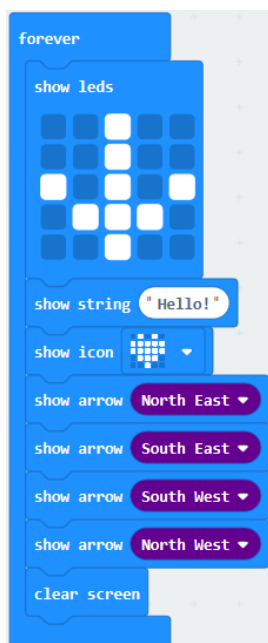


(5) Drag "pause (ms) 100" block from "Basic" block and set to 500ms, then leave

it below "clear screen" block.

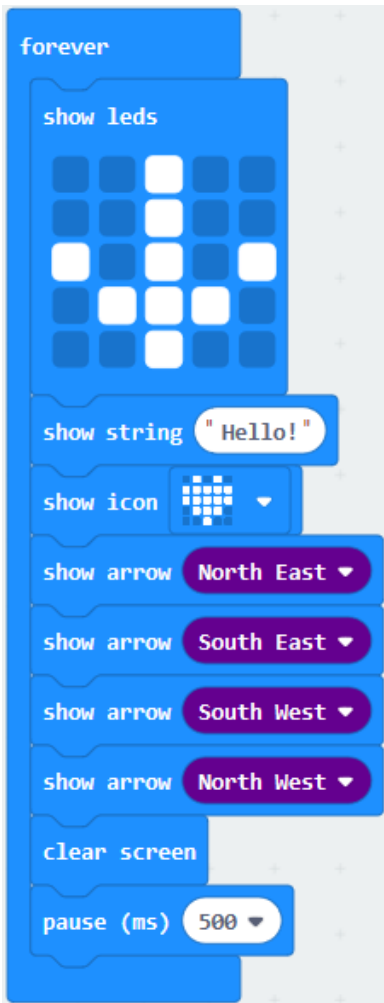

Complete Program:

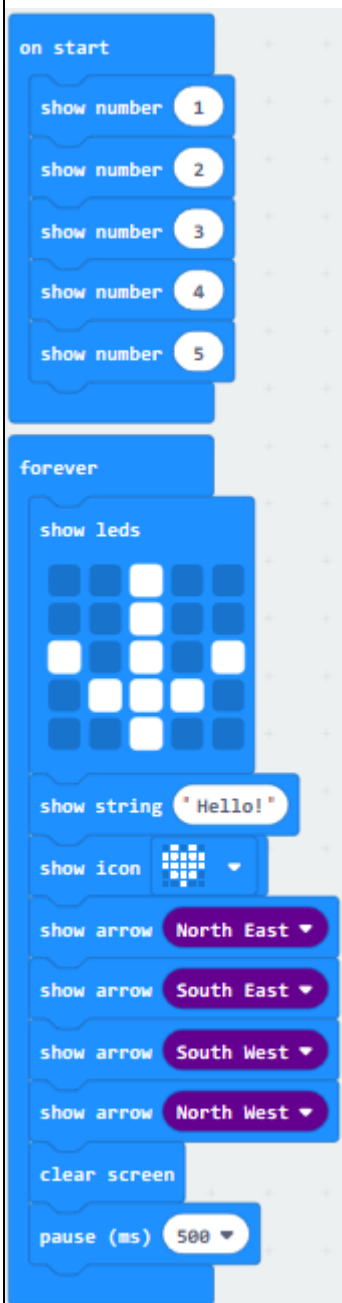

"on start": command block only runs once to start program.

LED dot matrix displays 1,2,3,4,5

Under the block "forever", program runs cyclically.

Dot matrix shows the "↓" pattern

Dot matrix scrolls to show "Hello!"

"♥" is shown on dot matrix

LED dot matrix displays "North East" arrow.

The "South East" arrow shows up on LED dot matrix

The "South West" arrow appears up on LED dot matrix

The "North West" arrow is displayed on LED dot matrix

Clear the screen

Delay in 500ms

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



```
1 basic.showNumber(1)
2 basic.showNumber(2)
3 basic.showNumber(3)
4 basic.showNumber(4)
5 basic.showNumber(5)
6 basic.forever(function () {
7     basic.showLeds(`
8         . . # . .
9         . . # . .
10        # . # . #
11        . # # # .
12        . . # . .
13        `)
14     basic.showString("Hello!")
15     basic.showIcon(IconNames.Heart)
16     basic.showArrow(ArrowNames.NorthEast)
17     basic.showArrow(ArrowNames.SouthEast)
18     basic.showArrow(ArrowNames.SouthWest)
19     basic.showArrow(ArrowNames.NorthWest)
20     basic.clearScreen()
21     basic.pause(500)
22 })
23
```


```

Blocks Python
1 basic.show_number(1)
2 basic.show_number(2)
3 basic.show_number(3)
4 basic.show_number(4)
5 basic.show_number(5)
6
7 def on_forever():
8     basic.show_leds("""
9         . . # . .
10        . . # . .
11        # . # . #
12        . # # # .
13        . . # . .
14        """)
15    basic.show_string("Hello!")
16    basic.show_icon(IconNames.HEART)
17    basic.show_arrow(ArrowNames.NORTH_EAST)
18    basic.show_arrow(ArrowNames.SOUTH_EAST)
19    basic.show_arrow(ArrowNames.SOUTH_WEST)
20    basic.show_arrow(ArrowNames.NORTH_WEST)
21    basic.clear_screen()
22    basic.pause(500)
23 basic.forever(on_forever)
24


```

(6)Test Results 2:

Upload code 2 and plug micro:bit to power. Micro: bit starts showing number 1,

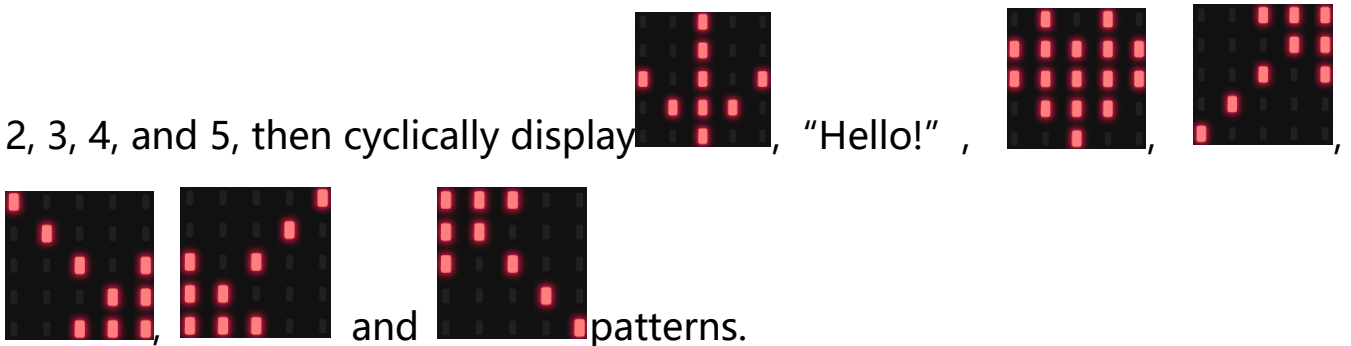

Project 4: Programmable Buttons

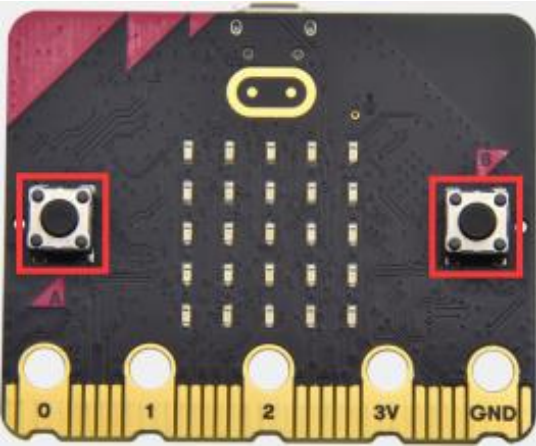

(1)Project Description:

Buttons can be used to control circuits. In an integrated circuit with a button, the circuit is connected when pressing the button and it is open the other way around.

Micro: Bit main board V2 boasts three buttons, two are programmable buttons(marked with A and B), and the one on the other side is a reset button. By pressing the two programmable buttons can input three different signals. We can press button A or B alone or press them together and the LED dot matrix shows A,B and AB respectively. Let' s get started.

(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1



(3)Test Code 1:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,


(1) Delete "on start" and "forever" firstly, then click "Input" → "on button A pressed"

(1) A. Click "Basic" → "show string" ;


B. Then place it into "on button A pressed" block, change "Hello!" into "A" .

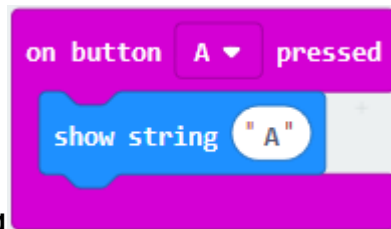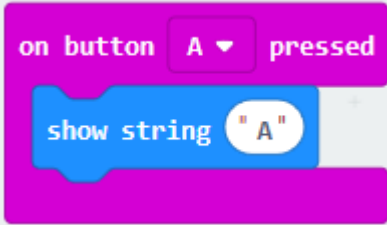



(2) Copy code string  once, tap the drop-down button "A"

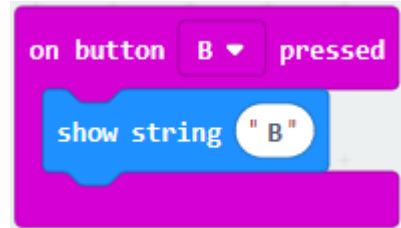

to select "B" and modify character "A" into "B" .

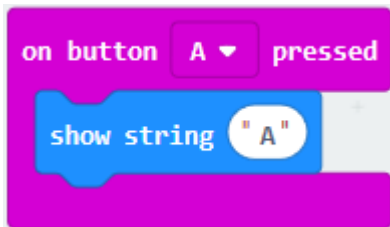

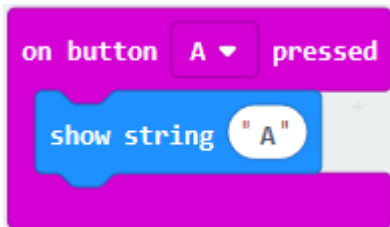
(3) Copy  once , and set to "on button A+B pressed" and "show string "AB"

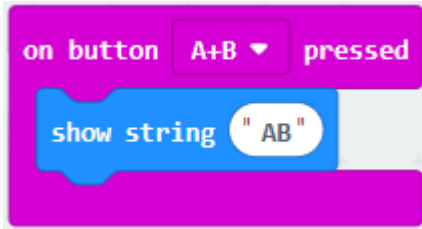


Complete Code:

	<p>Press button A on Micro: bit main board</p> <p>Show the character "A"</p>
	<p>Press button B on Micro: bit main board</p> <p>Show the character "B"</p>
	<p>Press button A and B at same time</p> <p>Display the character "AB"</p>

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

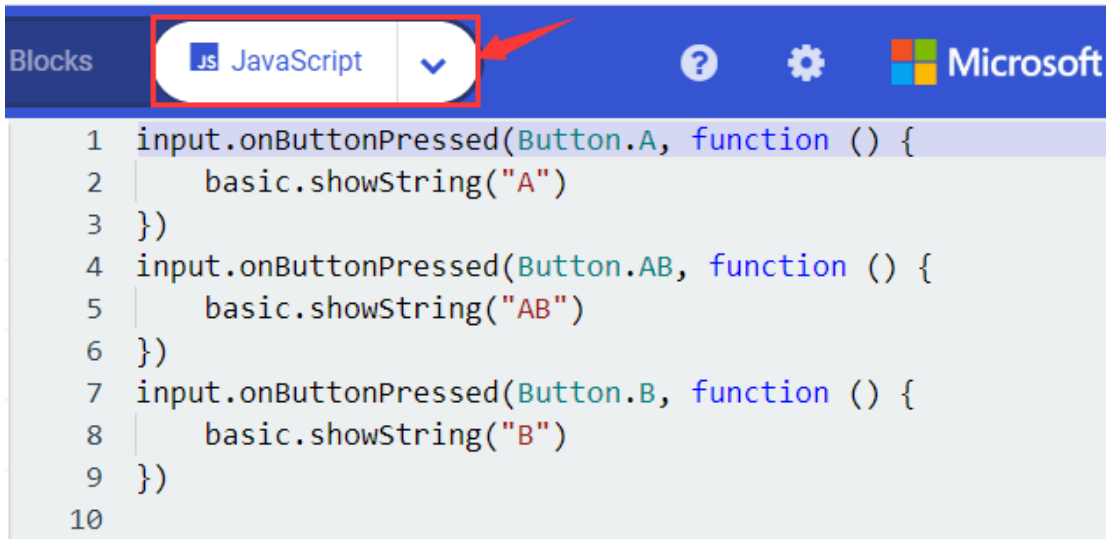

```
1 input.onButtonPressed(Button.A, function () {
2   basic.showString("A")
3 })
4 input.onButtonPressed(Button.AB, function () {
5   basic.showString("AB")
6 })
7 input.onButtonPressed(Button.B, function () {
8   basic.showString("B")
9 })
10
```

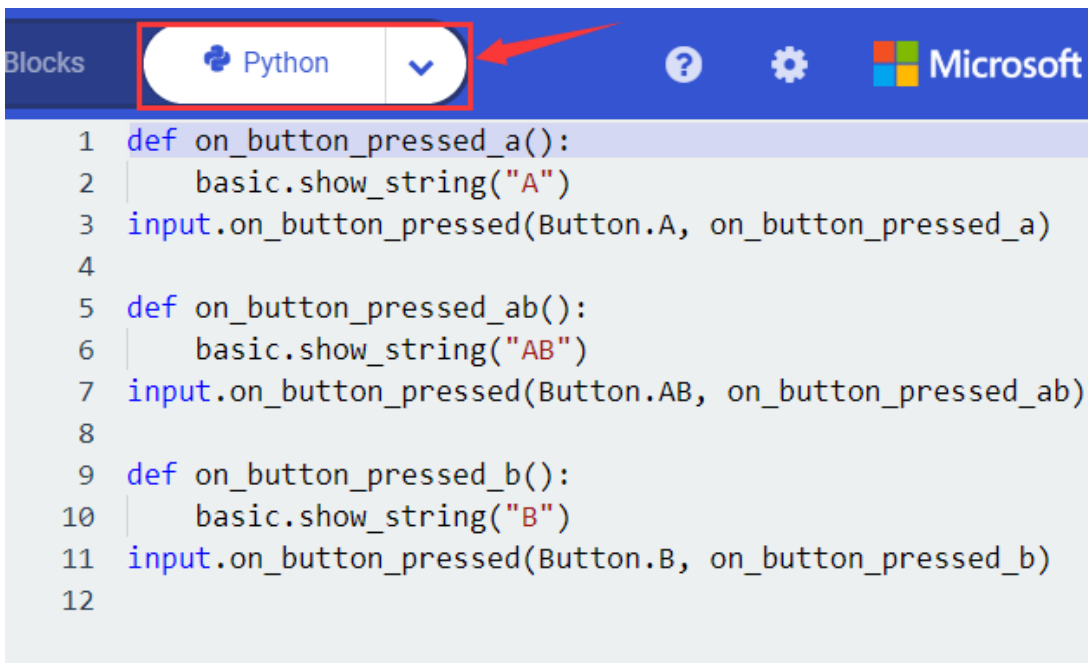

```
1 def on_button_pressed_a():
2   basic.show_string("A")
3 input.on_button_pressed(Button.A, on_button_pressed_a)
4
5 def on_button_pressed_ab():
6   basic.show_string("AB")
7 input.on_button_pressed(Button.AB, on_button_pressed_ab)
8
9 def on_button_pressed_b():
10  basic.show_string("B")
11 input.on_button_pressed(Button.B, on_button_pressed_b)
12
```


(4) Test Results 1:

After uploading test code 1 to micro:bit main board V2 and powering the main board via the USB cable, the 5*5 LED dot matrix shows A if button A is pressed, B if button B pressed, and AB if button A and B pressed together.

(5) Test Code 2:

(1) A. Click "Led" → "more" → "led enable false" ,

B. Put it into the block "on start" , click drop-down triangle button to select

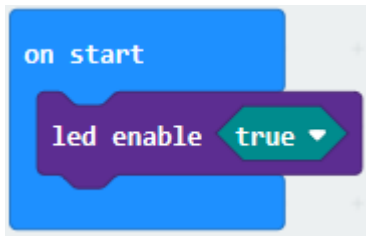


"true"

(2) A. Tap "Variables" → "Make a Variable..." → "New variable name: "

B. Enter "item" in the dialog box and click "OK" , then variable "item" is produced.

And move "set item to 0" into "on start" block

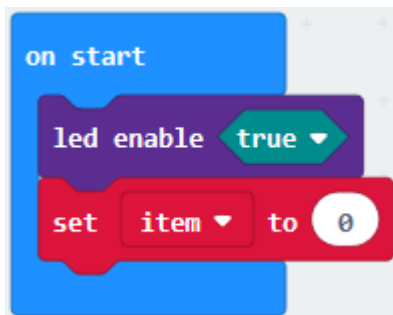

(3) A. Click "Input" → "on button A pressed" .

B. Go to "Variables" → " change item by 1 "

C. Place it into "on button A pressed" and 1 is modified into 5.





(4) Duplicate code string once, click the drop-down




button to select "B" , then set "change item by -5" .

(5) A. Enter "Led" → "plot bar graph of 0 up to 0"

B. Keep it into "forever" block

C. Go to "Variables" to move "item" into 0 box, change 0 into 25.

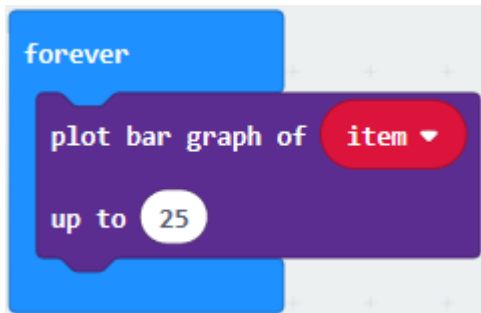

(6)A. Go to "Logic" to move out "if...true...then..." and "=" blocks,

B. Keep "=" into "true" box and set to ">"

C. Select "item" in the "Variables" and lay it down at left box of ">" , change 0 into 25;

D. Enter "Variables" to drag "set item to 0" block into "if...true..then..." , alter 0 into 25.

```
forever
  plot bar graph of item
  up to 25
  if item > 25 then
    set item to 25
```

```
if item > 25 then
  set item to 25
```

(7) A. Replicate code string once


B. ">" is modified into "<" and 25 is changed into 0,

```
if item < 0 then
  set item to 25
```

C. Leave it beneath code string.

```
forever
  plot bar graph of item
  up to 25
  if item > 25 then
    set item to 25
  if item < 0 then
    set item to 0
```

Complete Program:

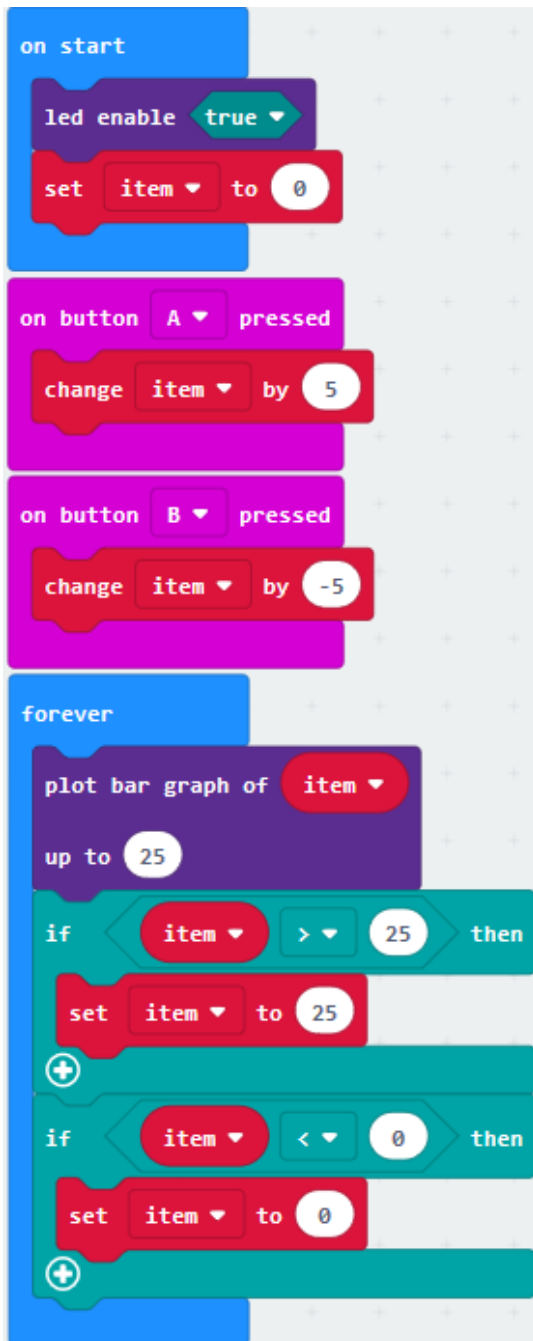

"on start": command block runs once to start program.

Turn on LED dot matrix

Set the initial value of item to 0

Press button A on Micro:bit board

Change item by 5

Press button B on Micro:bit board

Change item by -5

The program under the block "forever" runs cyclically. Light on LED in dot matrix to draw bar graph, light up up to 25 LEDs

If item is greater than 25

Then set item to 25

If item is less than 0

Then Set item to 0

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

Blocks

JavaScript

```
1 input.onButtonPressed(Button.A, function () {
2   item += 5
3 })
4 input.onButtonPressed(Button.B, function () {
5   item += -5
6 })
7 led.enable(true)
8 let item = 0
9 basic.forever(function () {
10   led.plotBarGraph(
11     item,
12     25
13   )
14   if (item > 25) {
15     item = 25
16   }
17   if (item < 0) {
18     item = 0
19   }
20 })
21
```

Blocks

Python

```
1 def on_button_pressed_a():
2   global item
3   item += 5
4 input.on_button_pressed(Button.A, on_button_pressed_a)
5
6 def on_button_pressed_b():
7   global item
8   item += -5
9 input.on_button_pressed(Button.B, on_button_pressed_b)
10
11 led.enable(True)
12 item = 0
13
14 def on_forever():
15   global item
16   led.plot_bar_graph(item, 25)
17   if item > 25:
18     item = 25
19   if item < 0:
20     item = 0
21 basic.forever(on_forever)
22
```


(6)Test Results 2:

After uploading test code 2 to micro:bit main board V2 and powering the main board via the USB cable, when pressing the button A the LEDs turning red increase while when pressing the button B the LEDs turning red reduce.

Project 5: Temperature Detection



(1)Project Description:


Actually ,the Micro:bit main board V2 is not equipped with a temperature sensor, but uses the temperature sensor built into NFR52833 chip for temperature detection. Therefore, the detected temperature is more closer to the temperature of the chip, and there maybe deviation from the ambient temperature.

(2)Components Needed:


- Micro:bit main board V2 *1
- Micro USB cable*

(3) Test Code 1:


(1) Click "Advanced" → "Serial" → "serial redirect to USB" into "on start"

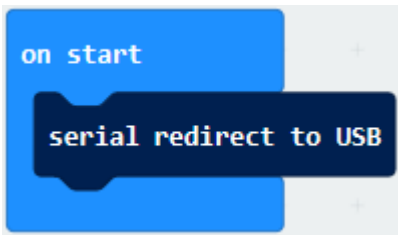

(2) A. Go to "Serial" → "serial write value "x" =0" into "forever"

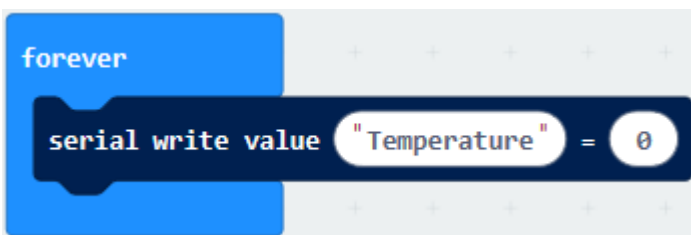

(3) Click "Input" → "temperature(°C)" into "into serial write value "x" =0 and change " 0" into "temperature"

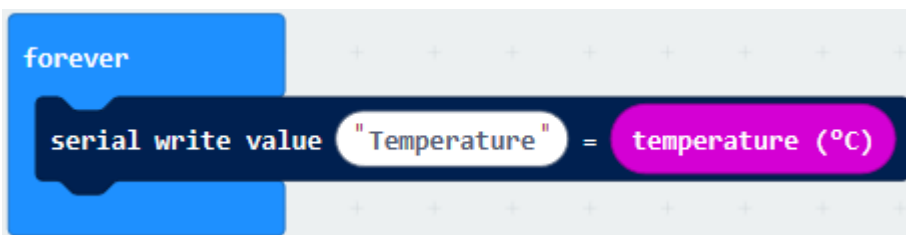

(4) Go to "Basic" → "pause (ms) 100" into "forever" and set pause to 500


```
forever
  serial write value "Temperature" = temperature (°C)
  pause (ms) 500
```

Complete Program:

```
on start
  serial redirect to USB







forever
  serial write value "Temperature" = temperature (°C)
  pause (ms) 500
```

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

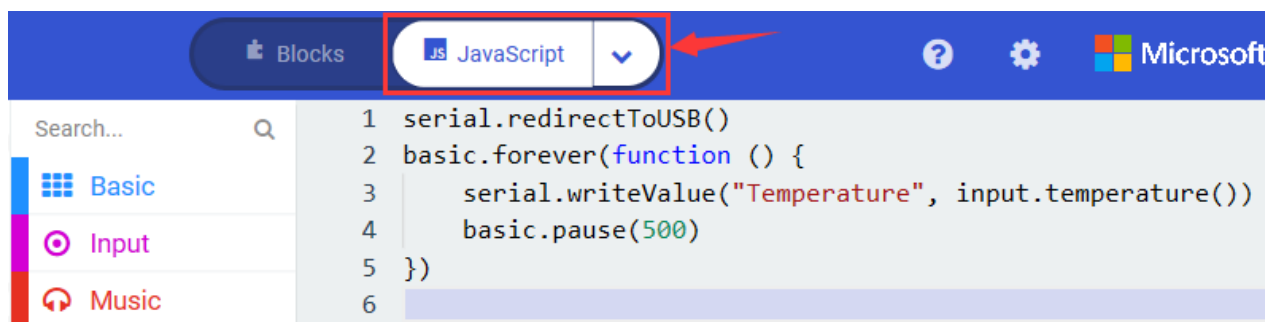

(4)Test Results 1:

After uploading test code 1 to micro:bit main board V2, powering the main board via the USB cable, and clicking "Show console Device", the data of temperature shows in the serial monitor page as shown below.

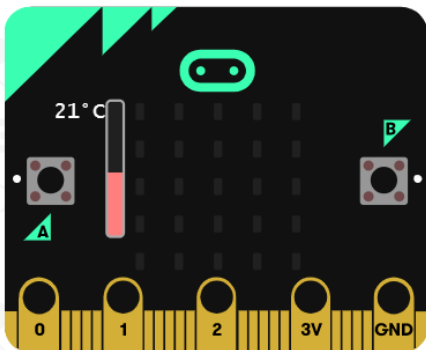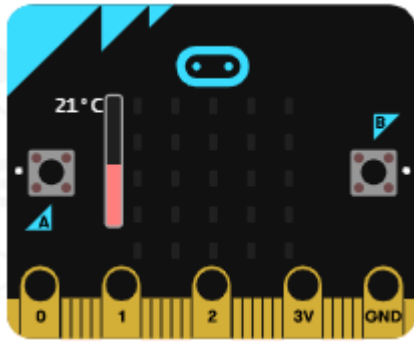



```
23 Temperature:24
31 Temperature:25
2 Temperature:24
3 Temperature:25
6 Temperature:24
2 Temperature:25
```


If you're running Windows 7 or 8 instead of Windows 10, via Google Chrome won't be able to match devices. You'll need to use the CoolTerm serial monitor software to read data.


You could open CoolTerm software, click Options, select SerialPort, set COM port and baud rate to 115200 (after testing, the baud rate of USB SerialPort

communication on Micro: Bit main board V2 is 115200), click OK, and Connect. The CoolTerm serial monitor shows the change of temperature in the current environment, as shown in the figures below :

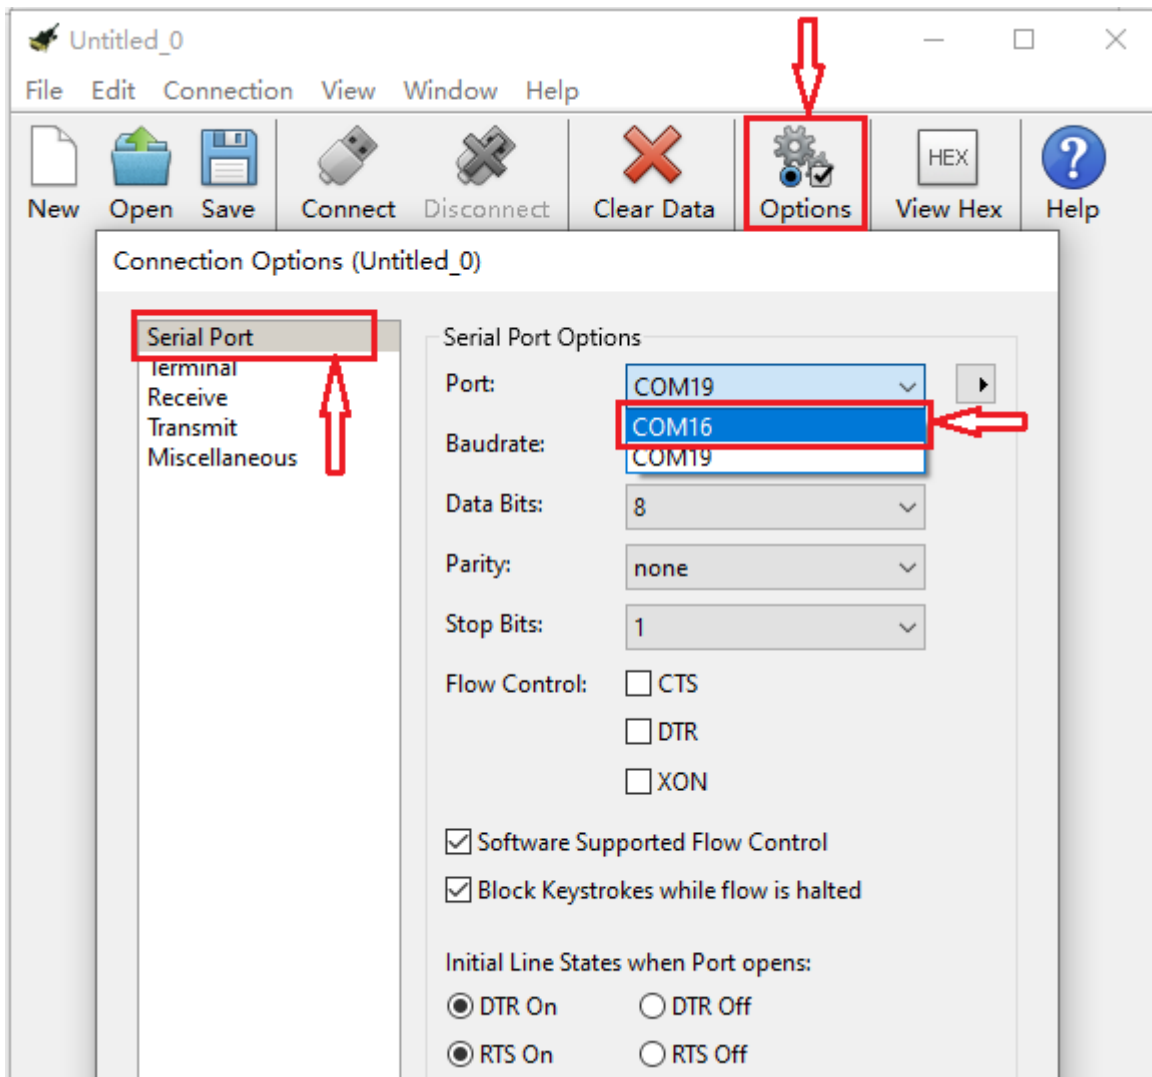

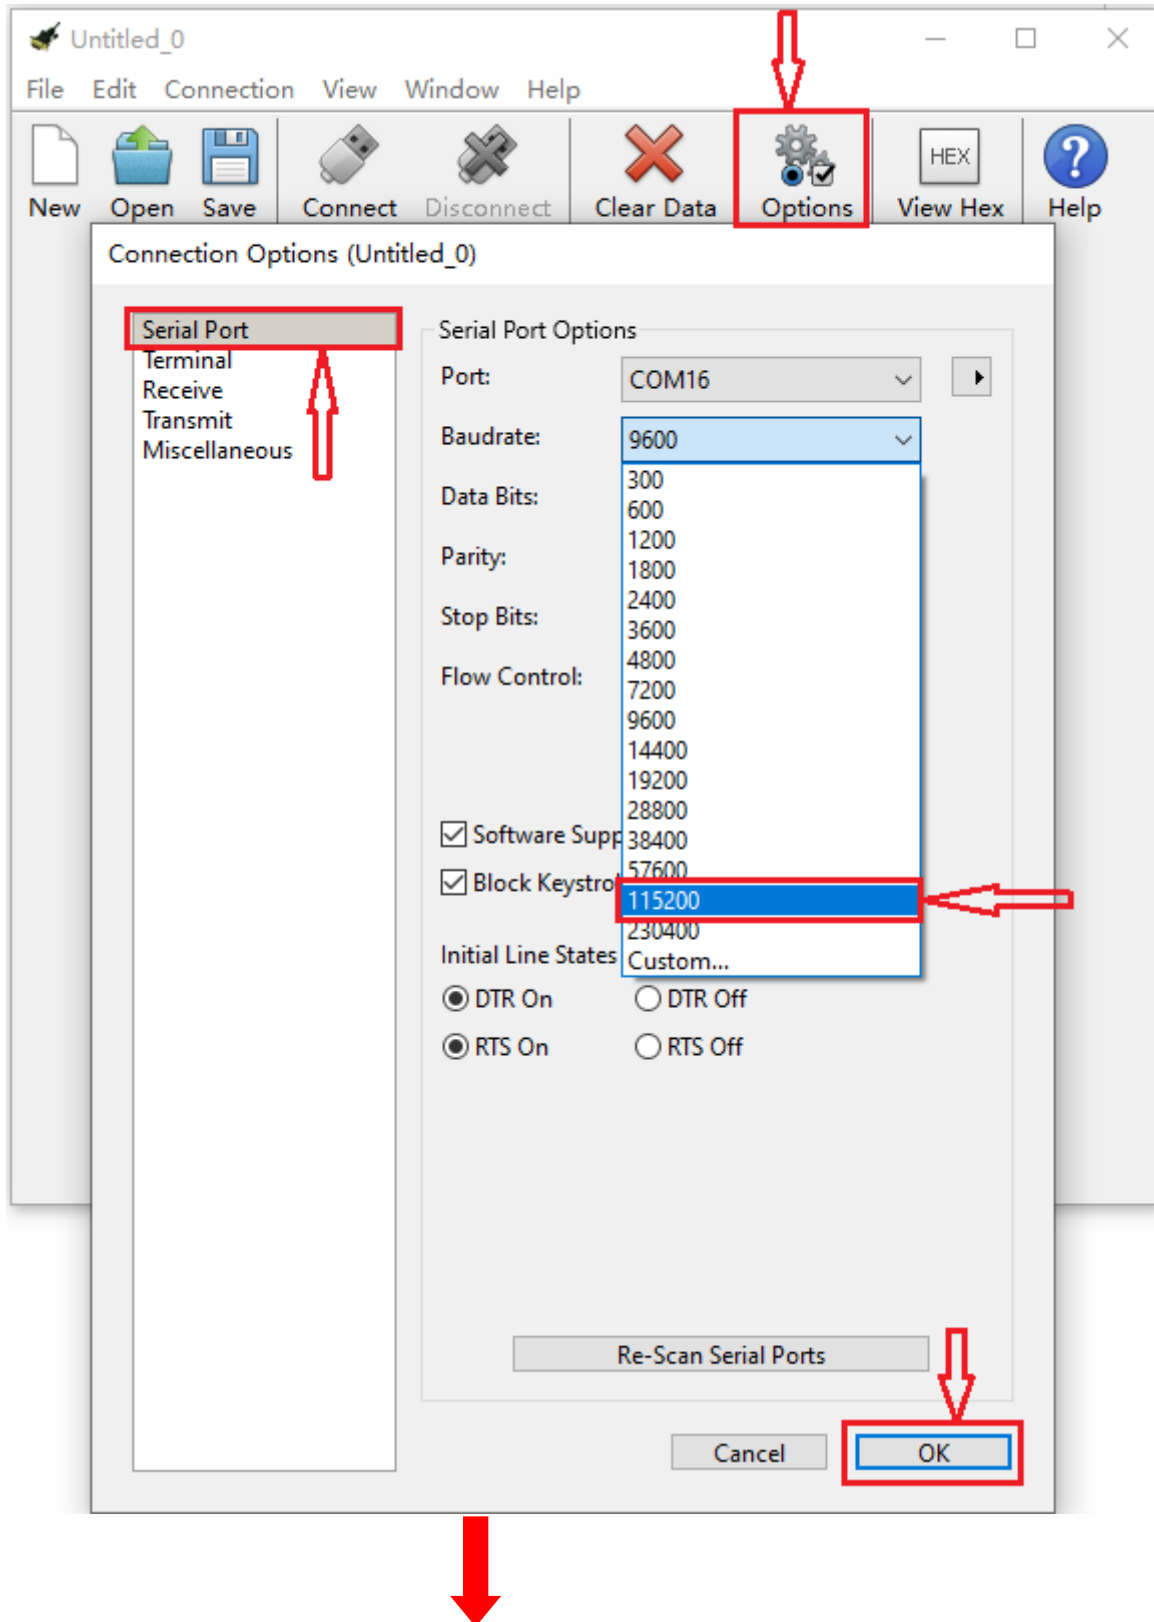

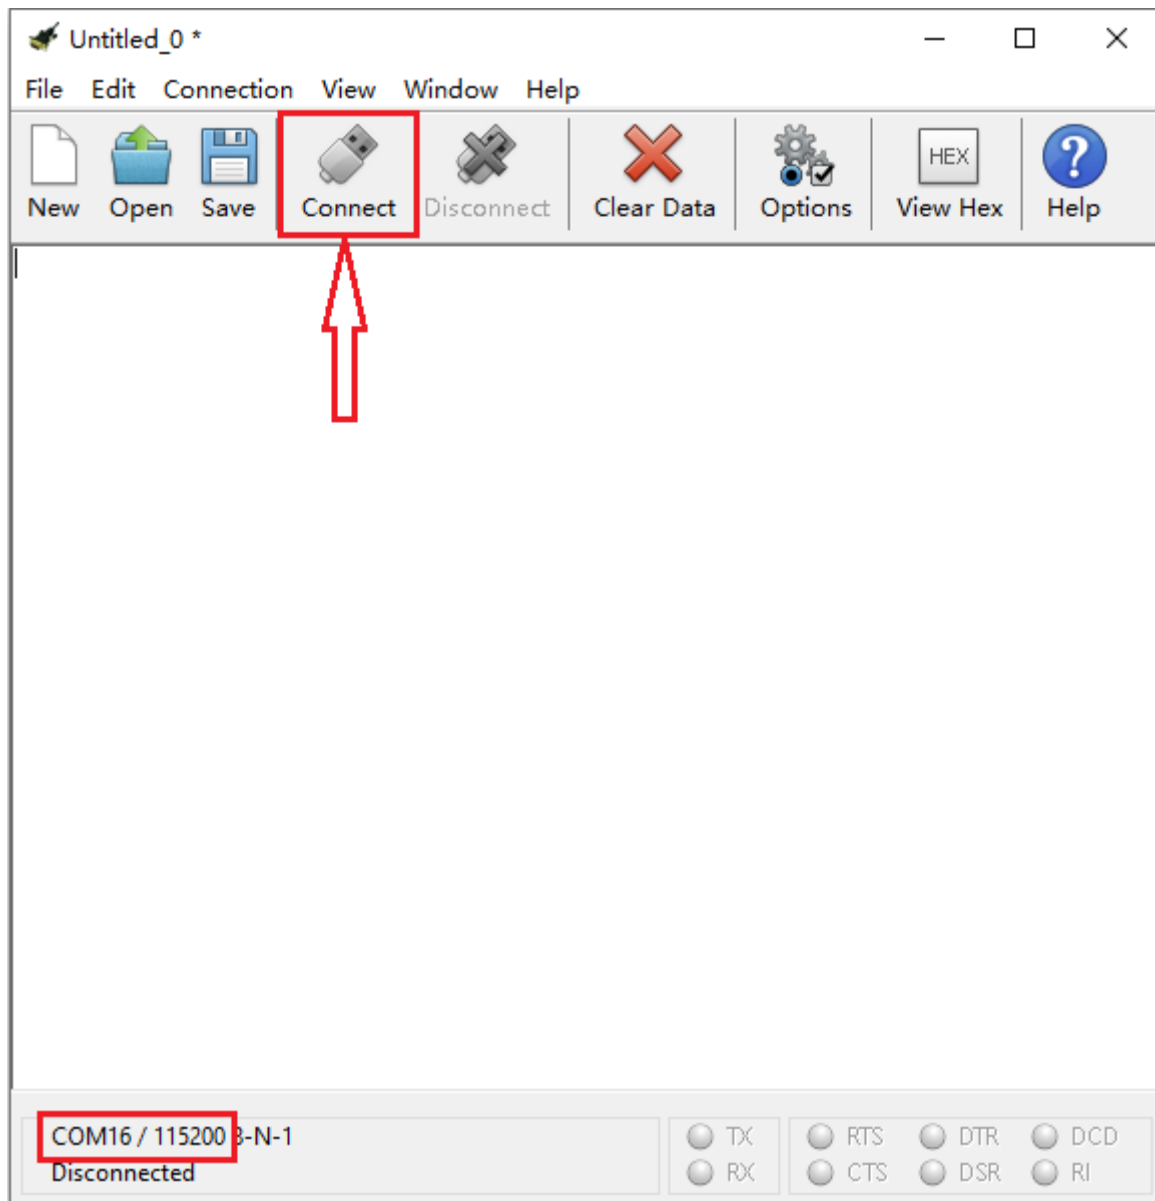

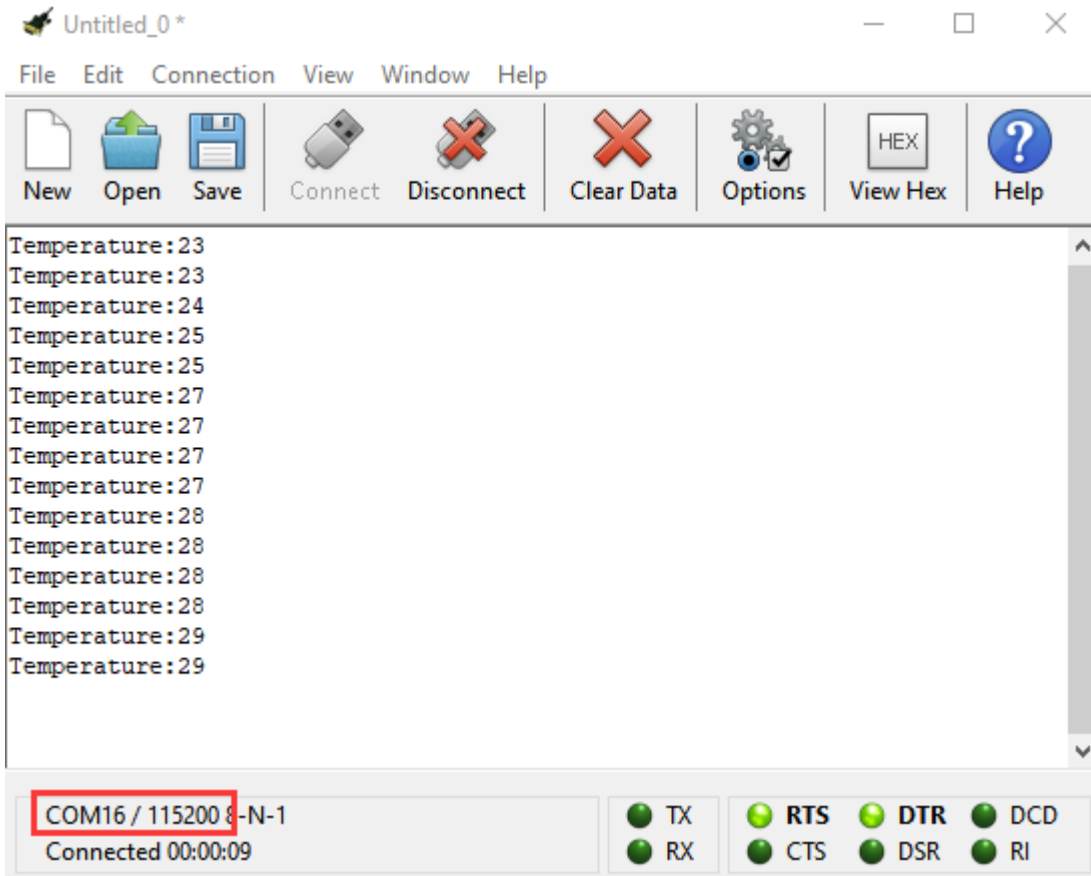


(5)Test Code 2:


Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

(1) A. Go to “Led” → “more” → “led enable false” block,


B. Keep it into the “on start” block, tap the triangle button to select “true” .

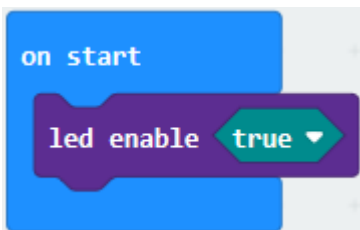

(2) Tap “Logic” and drag “if...then...else” into “forever” block; and then drag “=” into “true”

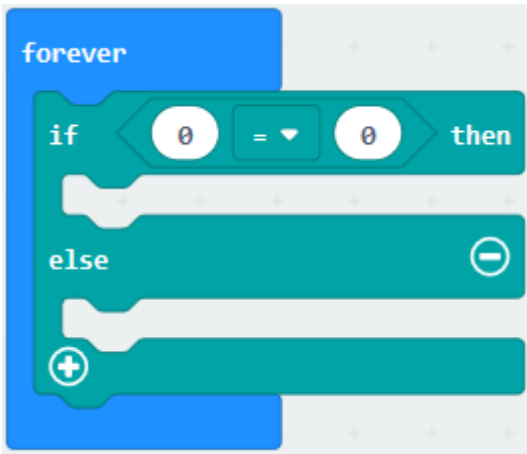

(3) Enter "Input" to move "temperature(°C)" into the left side of "=" ; click the little triangle of "=" to choose "≥" ,and change the "0" to "35"

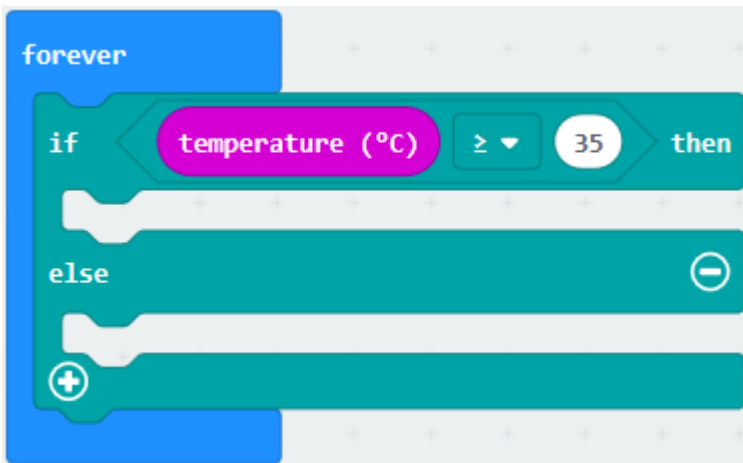

(4) Click "Basic" to find out block "show icon" and move it into "then" ; copy and place the block "show icon" to "else" and click the little triangle of

"" to select ""


```
forever
  if temperature (°C) >= 35 then
    show icon [grid icon]
  else
    show icon [grid icon]
```

Complete Program:

```
on start
  led enable true


forever
  if temperature (°C) >= 35 then
    show icon [grid icon]
  else
    show icon [grid icon]
```

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

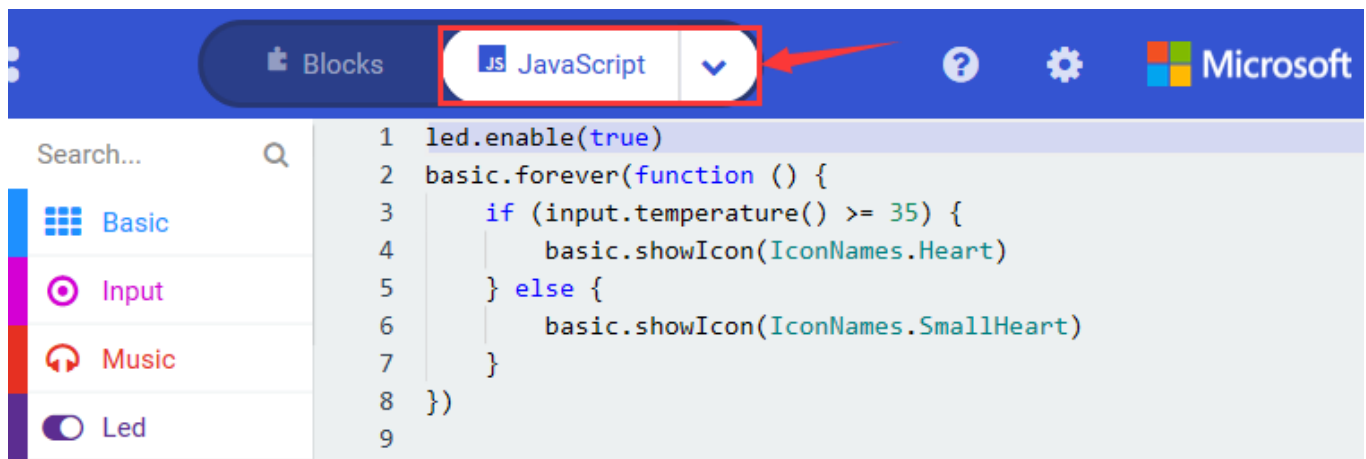

The screenshot shows the Microsoft MakeCode IDE interface. The top bar is blue and contains the 'Blocks' button, a dropdown menu currently set to 'JavaScript', a help icon, a settings gear, and the Microsoft logo. A red box highlights the 'JavaScript' dropdown, with a red arrow pointing to it. On the left, there is a search bar and a sidebar with categories: Basic, Input, Music, and Led. The main editor area displays JavaScript code:

```
1 led.enable(true)
2 basic.forever(function () {
3     if (input.temperature() >= 35) {
4         basic.showIcon(IconNames.Heart)
5     } else {
6         basic.showIcon(IconNames.SmallHeart)
7     }
8 })
9
```




The screenshot shows the Microsoft MakeCode IDE interface with the language dropdown set to 'Python'. A red box highlights the 'Python' dropdown, with a red arrow pointing to it. The main editor area displays Python code:


```
1 led.enable(True)
2
3 def on_forever():
4     if input.temperature() >= 35:
5         basic.show_icon(IconNames.HEART)
6     else:
7         basic.show_icon(IconNames.SMALL_HEART)
8 basic.forever(on_forever)
9
```

(6)Test Results 2:

After uploading the code 2, when the ambient temperature is less than 35°C,

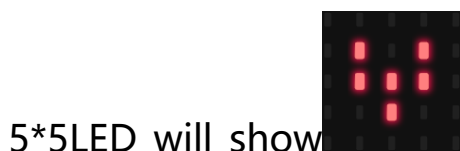

When the temperature is equivalent to or greater

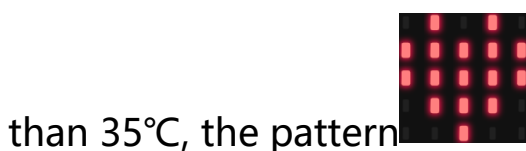

will appear.

Project 6: Geomagnetic Sensor



(1)Project Description:

This project aims to explain the use of the Micro: bit geomagnetic sensor, which can not only detect the strength of the geomagnetic field, but also be used as a compass to find bearings. It is also an important part of the navigation attitude reference system (AHRS). Micro: Bit main board V2 uses LSM303AGR geomagnetic sensor, and the dynamic range of magnetic field is ± 50 gauss. In the board, the magnetometer module is used in both magnetic detection and compass. In this experiment, the compass will be introduced first, and then the original data of the magnetometer will be checked. The main component of a common compass is a magnetic needle, which can be rotated by the geomagnetic field and point toward the geomagnetic North Pole (which is near the geographic South Pole) to determine direction.

(2)Components Needed:


- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code 1:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor.

(1) A. Click "Input" → "more" → "calibrate compass"


B. Lay down it into block "on start" .




(2) A. Go to "Input" → "on button A pressed" .

B. Enter "Basic" → "show number" , put it into "on button A pressed" block;

C. Tap "Input" → "compass heading(°C)" , and place it into "show number"

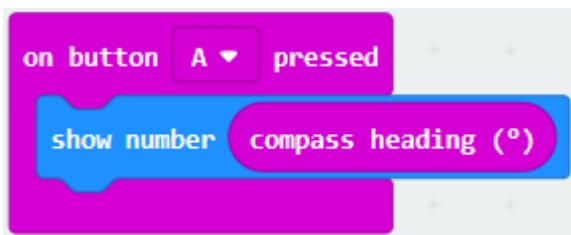

Complete Program:

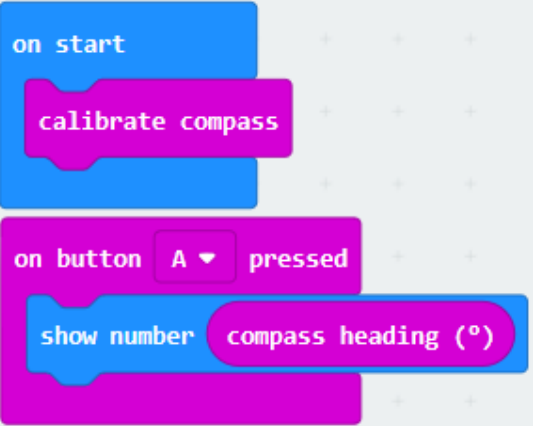


① "on start": command block only runs once to start program.

② Calibrate compass

③ Press button A on Micro:bit main board

④ Dot matrix shows the direction of compass heading


Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



```

1 input.onButtonPressed(Button.A, function () {
2     basic.showNumber(input.compassHeading())
3 })
4 input.calibrateCompass()
5

```




```

1 def on_button_pressed_a():
2     basic.show_number(input.compass_heading())
3 input.on_button_pressed(Button.A, on_button_pressed_a)
4
5 input.calibrate_compass()

```

(4)Test Results 1:

After uploading test code to micro:bit main board V2 and powering the board via the USB cable, and pressing the button A, the board asks us to calibrate compass and the LED dot matrix shows "TILT TO FILL SCREEN" . Then enter the calibration page. Rotate the board until all 25 LEDs are on red as shown below.

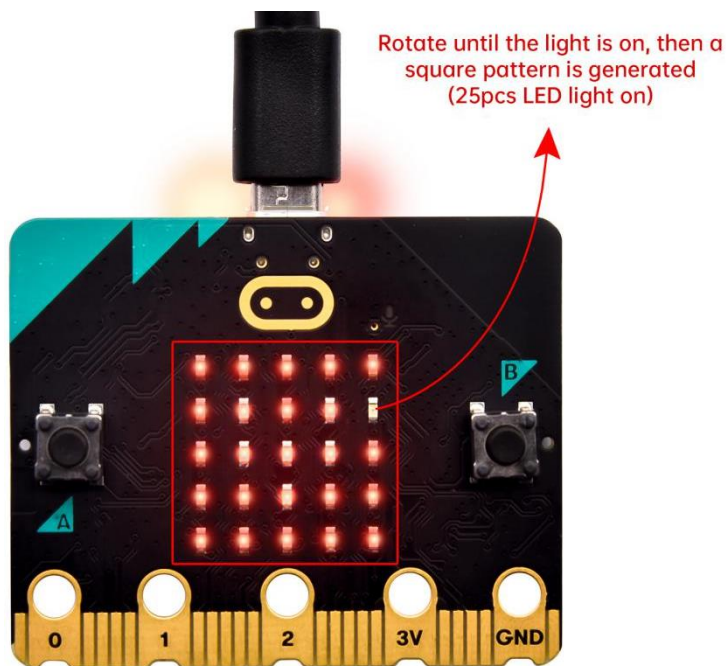

Rotate until the light is on, then a square pattern is generated (25pcs LED light on)

After that, a smile pattern  appears, which implies the calibration is done.

When the calibration process is completed, pressing the button A will make the magnetometer reading display directly on the screen. And the direction north, east, south and west correspond to 0°, 90°, 180° and 270°.


(5) Test Code 2:


```

forever
  set x to compass heading (°)
  if x ≥ 293 and x < 338 then
    show leds
  else if x ≥ 23 and x < 68 then

```

This module can keep readings to determine direction, so does point to the current magnetic North Pole by arrow.

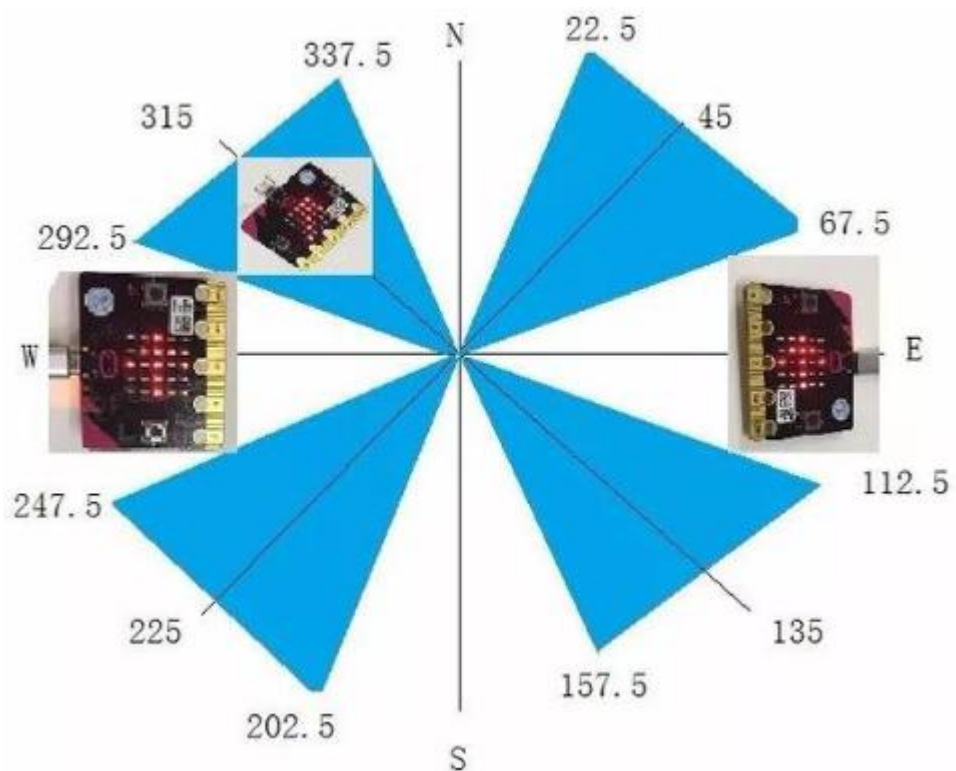


For the above picture, the arrow pointing to the upper right when the value ranges from 292.5 to 337.5. 0.5 can't be input in the code, thereby, the values we get are 293 and 338.

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

(1)

A. Enter "Input" → "more" → "calibrate compass"


B. Move "calibrate compass" into "on start"




(2) A. Click "Variables" → "Make a Variable..." → "New variable name: "


B. Input "x" in the blank box and click "OK" , and the variable "x" is generated.

C. Drag out "set x to" into "forever" block

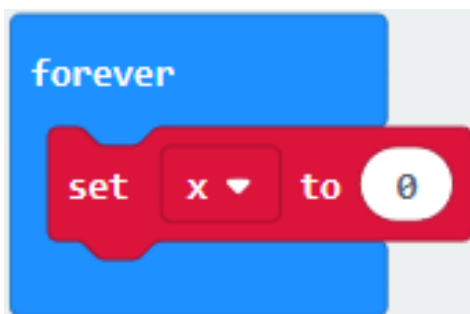

(3) A. Go to "Input" → "compass heading(°C)" , and keep it into "0" box

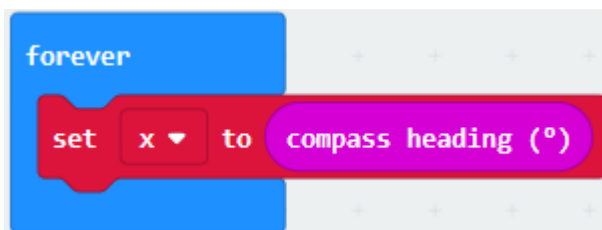


C. Tap "Logic" → "if...then...else" , leave it below block "sex x to compass heading" , then click  icon for 6 times.

(4) A. Place "and" into "true" block

B. Then move "=" block to the left box of "and"


C. Click "Variables" to drag "x" to the left "0" box, change 0 into 293 and set to "≥" ;

D. Then copy "x≥293" once and leave it to the right "0" box and set to "x<338"

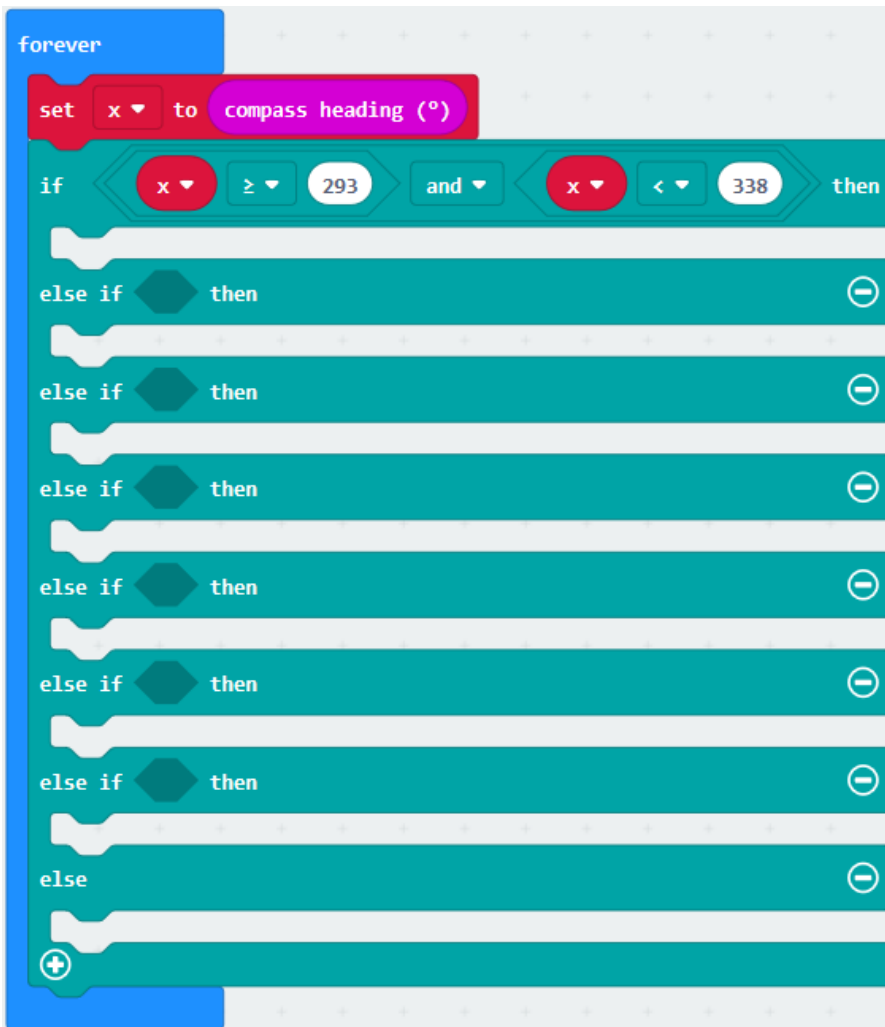


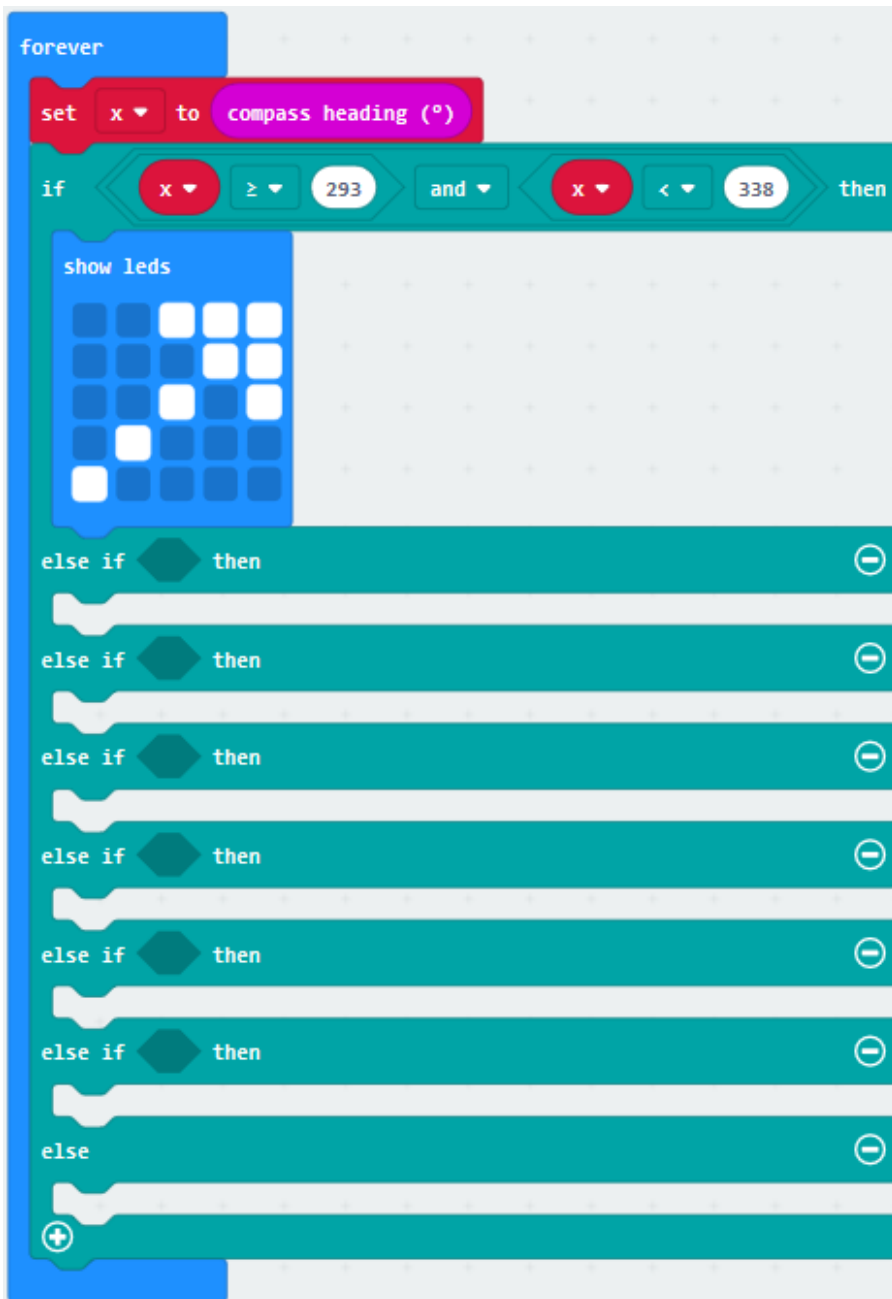
(5) A. Go to "Basic" → "show leds"

B. Lay it down beneath

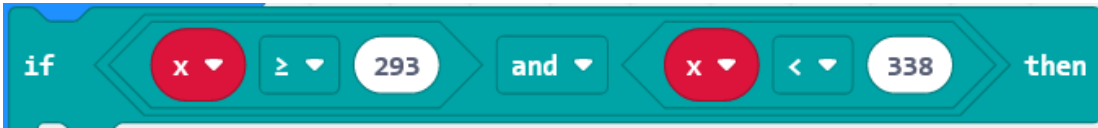

block, then

click "show leds" and the pattern  appears.










(6) A. Duplicate  for 6 times.


B. Separately leave them into the blank boxes behind "else if" .

C. Set to "x ≥ 23 and x < 68" , "x ≥ 68 and x < 113 " , "x ≥ 113 and x < 158 " , "x ≥ 158 and x < 203 " , "x ≥ 203 and x < 248 " , "x ≥ 248 and x < 293 " respectively.

D. Then copy "show leds" for 7 times and keep them below the "else if.....then" block respectively.

E. Click the blue boxes to form the pattern  ,  ,  ,  ,  ,  and  .

Complete Program :

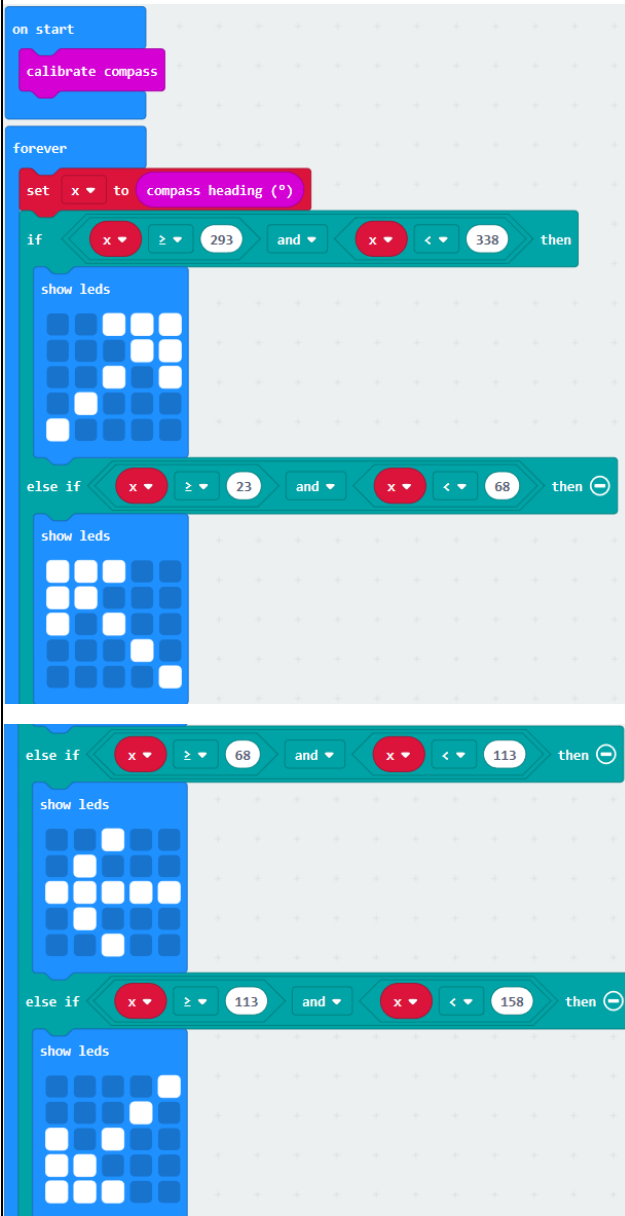

“on start”: command block only runs once to start program.

Calibrate compass

The program under the block “forever” runs cyclically.

Store the angle of the compass heading into the variable x

When $293 \leq x < 338$, the next program will be executed



appears on the dot matrix

When $23 \leq x < 68$, the next program will be executed



is displayed on dot matrix


When $68 \leq x < 113$, the next program will be executed




is shown on dot matrix

When $113 \leq x < 158$, the next program will be executed



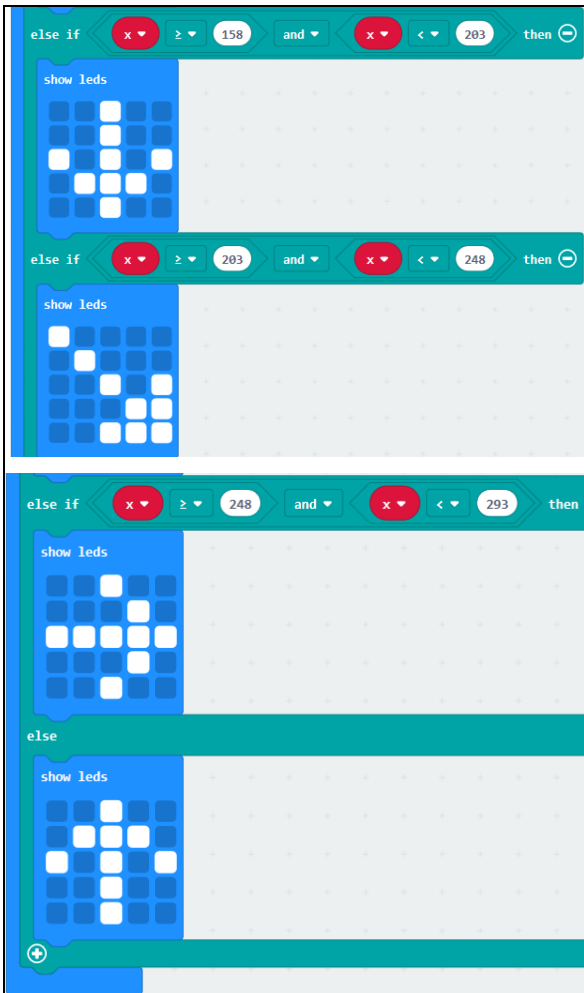



When $158 \leq x < 203$, the next program will be executed.

Dot matrix shows 

When $203 \leq x < 248$, the next program will be executed.


Dot matrix displays 

When $248 \leq x < 293$, the next program will be executed.

Dot matrix shows 

When x is not among the above rang, the next program will be executed under else block

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

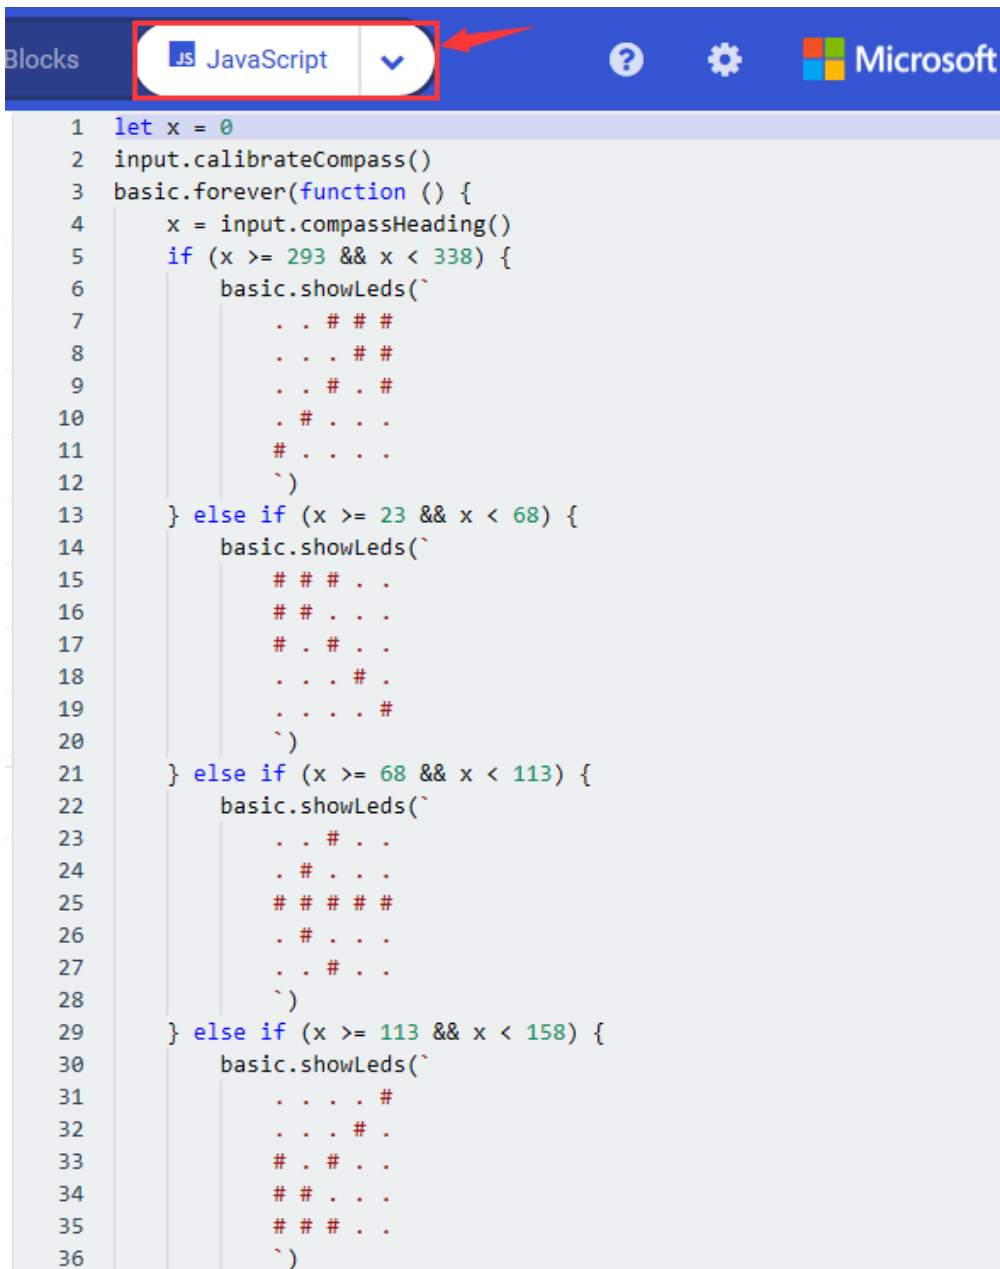

```
1 let x = 0
2 input.calibrateCompass()
3 basic.forever(function () {
4   x = input.compassHeading()
5   if (x >= 293 && x < 338) {
6     basic.showLeds(`
7       . . # # #
8         . . . # #
9         . . # . #
10        . # . . .
11        # . . . .
12        `)
13   } else if (x >= 23 && x < 68) {
14     basic.showLeds(`
15       # # # . .
16       # # . . .
17       # . # . .
18       . . . # .
19       . . . . #
20       `)
21   } else if (x >= 68 && x < 113) {
22     basic.showLeds(`
23       . . # . .
24       . # . . .
25       # # # # #
26       . # . . .
27       . . # . .
28       `)
29   } else if (x >= 113 && x < 158) {
30     basic.showLeds(`
31       . . . . #
32       . . . # .
33       # . # . .
34       # # . . .
35       # # # . .
36       `)
```



```
37 } else if (x >= 158 && x < 203) {
38     basic.showLeds(`
39         . . # . .
40         . . # . .
41         # . # . #
42         . # # # .
43         . . # . .
44         `)
45 } else if (x >= 203 && x < 248) {
46     basic.showLeds(`
47         # . . . .
48         . # . . .
49         . . # . #
50         . . . # #
51         . . # # #
52         `)
53 } else if (x >= 248 && x < 293) {
54     basic.showLeds(`
55         . . # . .
56         . . . # .
57         # # # # #
58         . . . # .
59         . . # . .
60         `)
61 } else {
62     basic.showLeds(`
63         . . # . .
64         . # # # .
65         # . # . #
66         . . # . .
67         . . # . .
68         `)
69 }
70 })
71
```



```
1 x = 0
2 input.calibrate_compass()
3
4 def on_forever():
5     global x
6     x = input.compass_heading()
7     if x >= 293 and x < 338:
8         basic.show_leds("""
9             . . # # #
10            . . . # #
11            . . # . #
12            . # . . .
13            # . . . .
14            """)
15     elif x >= 23 and x < 68:
16         basic.show_leds("""
17            # # # . .
18            # # . . .
19            # . # . .
20            . . . # .
21            . . . . #
22            """)
23     elif x >= 68 and x < 113:
24         basic.show_leds("""
25            . . # . .
26            . # . . .
27            # # # # #
28            . # . . .
29            . . # . .
30            """)
31     elif x >= 113 and x < 158:
32         basic.show_leds("""
33            . . . . #
34            . . . # .
35            # . # . .
36            # # . . .
37            # # # . .
38            """)
```

```

39     elif x >= 158 and x < 203:
40         basic.show_leds("""
41             . . # . .
42             . . # . .
43             # . # . #
44             . # # # .
45             . . # . .
46             """)
47     elif x >= 203 and x < 248:
48         basic.show_leds("""
49             # . . . .
50             . # . . .
51             . . # . #
52             . . . # #
53             . . # # #
54             """)
55     elif x >= 248 and x < 293:
56         basic.show_leds("""
57             . . # . .
58             . . . # .
59             # # # # #
60             . . . # .
61             . . # . .
62             """)
63     else:
64         basic.show_leds("""
65             . . # . .
66             . # # # .
67             # . # . #
68             . . # . .
69             . . # . .
70             """)
71 basic.forever(on_forever)
72

```

(6) Test Results 2

Upload code 2 and plug micro:bit to power. After calibration, tilt micro:bit board, the LED dot matrix displays the direction signs.

Project 7: Accelerometer



(1)Project Description:

The Micro: Bit main board V2 has a built-in LSM303AGR gravity acceleration sensor, also known as accelerometer, with a resolution of 8/10/12 bits. The code section sets the range to 1g, 2g, 4g, and 8g.

We often use accelerometer to detect the status of machines.

In this project, we will introduce how to measure the position of the board with the accelerometer. And then have a look at the original three-axis data output by the accelerometer.

(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code 1:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,


(1) A. Enter "Input" → "on shake" ,

B. Click "Basic" → "show number" , place it into "on shake" block, then change

0 into 1.



(2) A. Copy code string



for 7 times;

B. separately click the triangle button to select "logo up" , "logo down" ,
"screen up" , "screen down" , "tilt left" , "tilt right" and "free fall" , then
respectively change 1 into 2, 3, 4, 5, 6, 7, 8.

Complete Program :



Shake the Micro:bit board

LED dot matrix displays 1

The log is up

LED dot matrix displays 2

The logo is down

LED dot matrix displays 3

The screen is up

LED dot matrix displays 4



The screen is down

Number 5 is shown

The Micro:bit board is tilt to the left

Number 6 is displayed

The Micro:bit board is tilt to the right

Number7 is displayed

When the Micro:bit board is free fall

LED dot matrix shows 8

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



```
1 input.onGesture(Gesture.FreeFall, function () {
2     basic.showNumber(8)
3 })
4 input.onGesture(Gesture.LogoUp, function () {
5     basic.showNumber(2)
6 })
7 input.onGesture(Gesture.TiltLeft, function () {
8     basic.showNumber(6)
9 })
10 input.onGesture(Gesture.ScreenUp, function () {
11     basic.showNumber(4)
12 })
13 input.onGesture(Gesture.ScreenDown, function () {
14     basic.showNumber(5)
15 })
16 input.onGesture(Gesture.Shake, function () {
17     basic.showNumber(1)
18 })
19 input.onGesture(Gesture.TiltRight, function () {
20     basic.showNumber(7)
21 })
22 input.onGesture(Gesture.LogoDown, function () {
23     basic.showNumber(3)
24 })
25
```



```
1 def on_gesture_free_fall():
2     basic.show_number(8)
3 input.on_gesture(Gesture.FREE_FALL, on_gesture_free_fall)
4
5 def on_gesture_logo_up():
6     basic.show_number(2)
7 input.on_gesture(Gesture.LOGO_UP, on_gesture_logo_up)
8
9 def on_gesture_tilt_left():
10    basic.show_number(6)
11 input.on_gesture(Gesture.TILT_LEFT, on_gesture_tilt_left)
12
13 def on_gesture_screen_up():
14    basic.show_number(4)
15 input.on_gesture(Gesture.SCREEN_UP, on_gesture_screen_up)
16
17 def on_gesture_screen_down():
18    basic.show_number(5)
19 input.on_gesture(Gesture.SCREEN_DOWN, on_gesture_screen_down)
20
21 def on_gesture_shake():
22    basic.show_number(1)
23 input.on_gesture(Gesture.SHAKE, on_gesture_shake)
24
25 def on_gesture_tilt_right():
26    basic.show_number(7)
27 input.on_gesture(Gesture.TILT_RIGHT, on_gesture_tilt_right)
28
29 def on_gesture_logo_down():
30    basic.show_number(3)
31 input.on_gesture(Gesture.LOGO_DOWN, on_gesture_logo_down)
32
```

(4)Test Results 1:

After uploading the test code 1 to micro:bit main board V2 and powering the board via the USB cable, if we shake the Micro: Bit main board V2. no matter at any direction, the LED dot matrix displays the digit "1" .

When it is kept upright (its logo above the LED dot matrix) , the number 2 will show.



When it is kept upside down(its logo below the LED dot matrix) , it will show as below.



When it is placed still on the desk, showing its front side, the number 4 appears.




When it is placed still on the desk, showing its back side, the number 5 will exhibit.

When the board is tilted to the left , the LED dot matrix shows the number 6 as shown below.



When the board is tilted to the right , the LED dot matrix displays the number 7 as shown below




When the board is knocked to the floor, this process can be considered as a free fall and the LED dot matrix shows the number 8. (please note that this test is not recommended for it may damage the main board.)

Attention: if you' d like to try this function, you can also set the acceleration to 3g, 6g or 8g. But still ,we don not recommend.


(5)Test Code 2:

(1) A. Go to "Advanced" → "Serial" → "serial redirect to USB"

B. Drag it into "on start"

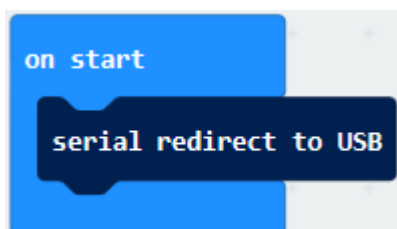


- (2) A. Enter "Serial" → "serial write value x =0"
- B. Leave it into "forever" block

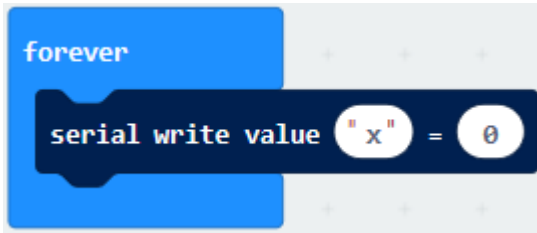


- (3) A. Click "Input" → "acceleration(mg) x" ;
- B. Keep it into "0" box and capitalize the "x"



- (4) Go to "Basic" and move out "pause (ms) 100" below the block
- serial write value "X" = acceleration (mg) x , then set to 100ms.

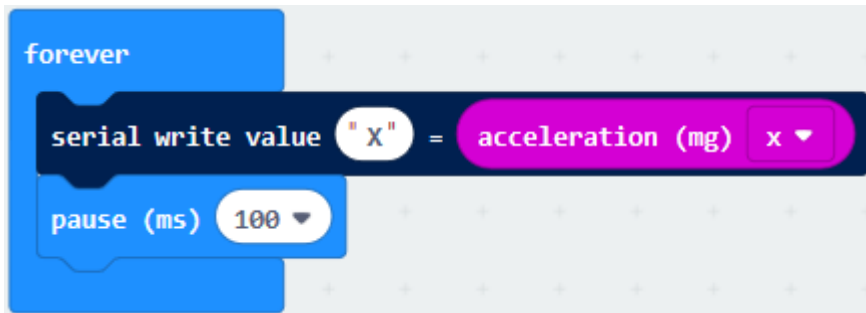


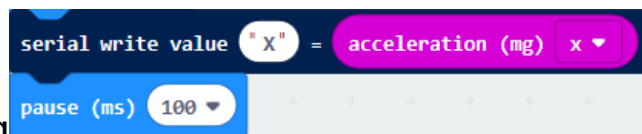

- (5) Replicate code string for 3 times and keep them into "forever" block, separately set the whole code string as follows:

```
forever
  serial write value "X" = acceleration (mg) x
  pause (ms) 100
  serial write value "Y" = acceleration (mg) y
  pause (ms) 100
  serial write value "Z" = acceleration (mg) z
  pause (ms) 100
  serial write value "S" = acceleration (mg) strength
  pause (ms) 100
```

Complete Program:

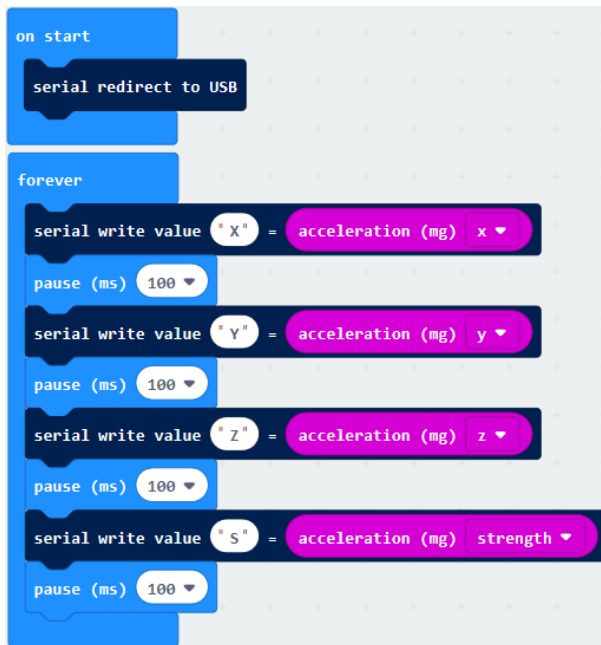

```
on start
  serial redirect to USB

forever
  serial write value "X" = acceleration (mg) x
  pause (ms) 100
  serial write value "Y" = acceleration (mg) y
  pause (ms) 100
  serial write value "Z" = acceleration (mg) z
  pause (ms) 100
  serial write value "S" = acceleration (mg) strength
  pause (ms) 100
```

"on start": command block runs once to start program.

Serial redirects to USB

The program under the block "forever" runs cyclically.


Serial write value "X"=acceleration value on x axis

Serial write value "Y"=acceleration value on y axis

Serial write value "Z"=acceleration value on z axis

Serial write value "S"=acceleration value on s axis

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:

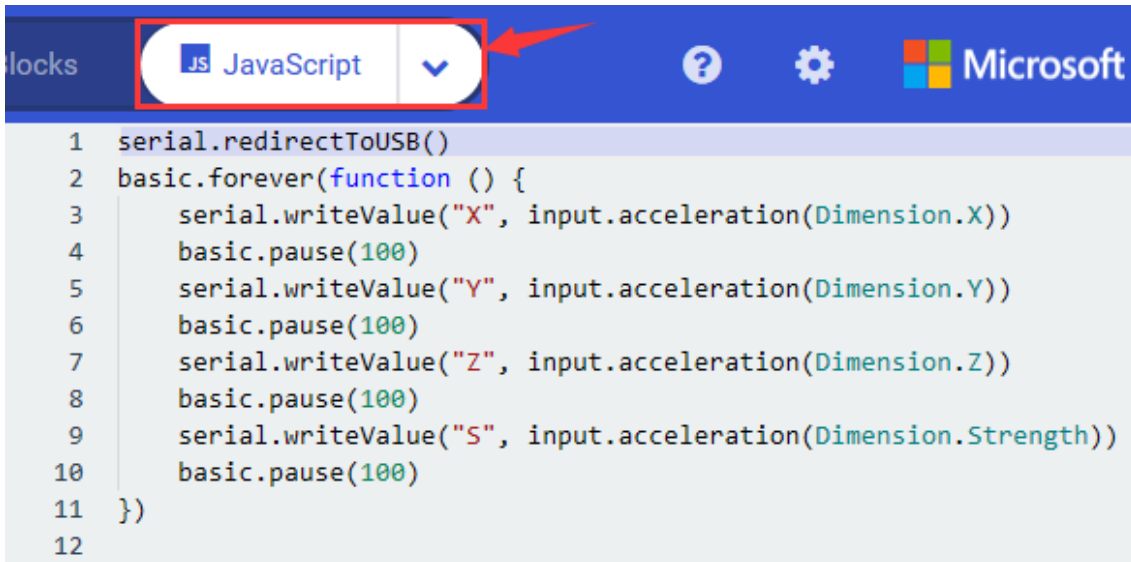


```
1 serial.redirectToUSB()
2 basic.forever(function () {
3     serial.writeValue("X", input.acceleration(Dimension.X))
4     basic.pause(100)
5     serial.writeValue("Y", input.acceleration(Dimension.Y))
6     basic.pause(100)
7     serial.writeValue("Z", input.acceleration(Dimension.Z))
8     basic.pause(100)
9     serial.writeValue("S", input.acceleration(Dimension.Strength))
10    basic.pause(100)
11 })
12
```





```
1 serial.redirect_to_usb()
2
3 def on_forever():
4     serial.write_value("X", input.acceleration(Dimension.X))
5     basic.pause(100)
6     serial.write_value("Y", input.acceleration(Dimension.Y))
7     basic.pause(100)
8     serial.write_value("Z", input.acceleration(Dimension.Z))
9     basic.pause(100)
10    serial.write_value("S", input.acceleration(Dimension.STRENGTH))
11    basic.pause(100)
12 basic.forever(on_forever)
13
```

(6) Test Results 2

Upload test code to micro:bit main board V2, power the main board via the USB cable, and click "Show console Device" .

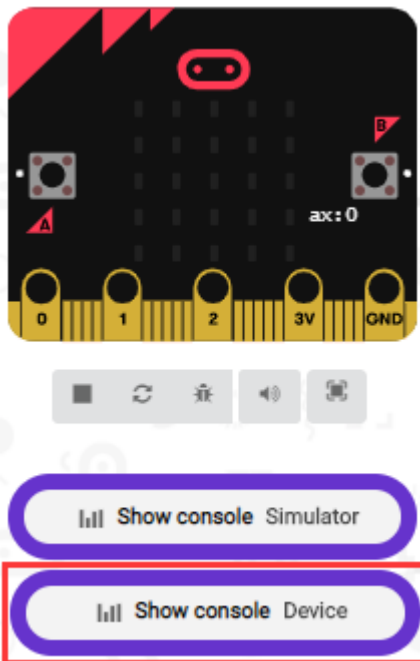

After referring to the MMA8653FC data manual and the hardware schematic diagram of the Micro: Bit main board V2, the accelerometer coordinate of the Micro: Bit V2 motherboard are shown in the figure below:

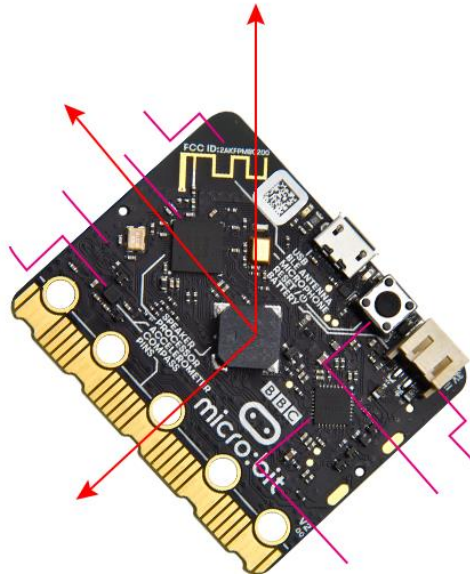


The following interface shows the decomposition value of acceleration in X axis, Y axis and Z axis respectively, as well as acceleration synthesis (acceleration synthesis of gravity and other external forces).




If you're running Windows 7 or 8 instead of Windows 10, via Google Chrome won't be able to match devices. You'll need to use the CoolTerm serial monitor software to read data.

You could open CoolTerm software, click Options, select SerialPort, set COM port and baud rate to 115200 (after testing, the baud rate of USB SerialPort communication on Micro: Bit main board V2 is 115200), click OK, and Connect. The CoolTerm serial monitor shows the data of X axis, Y axis and Z axis , as shown in the figures below :

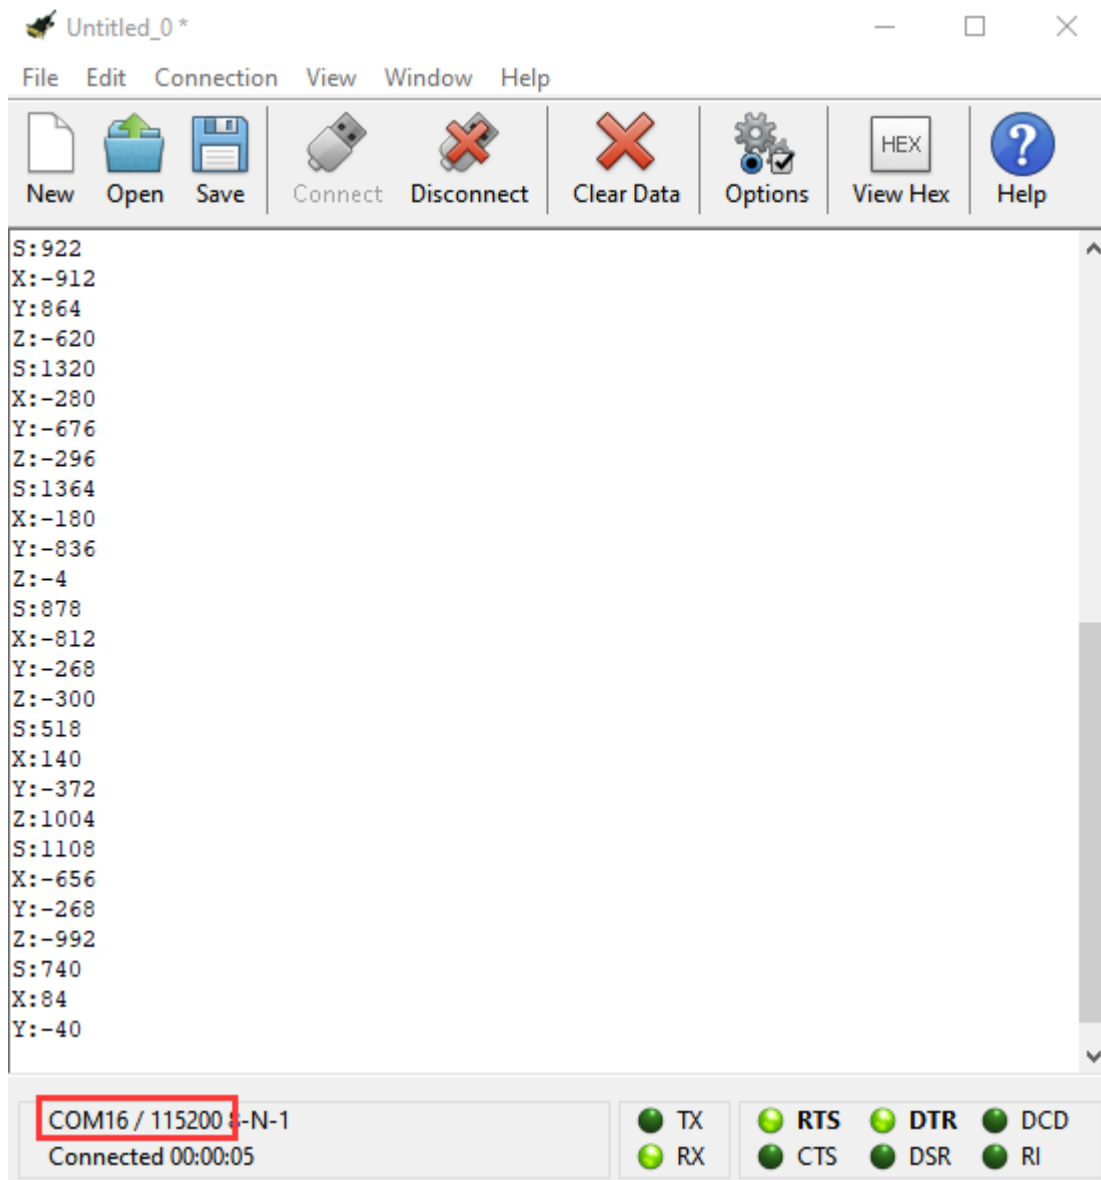

Project 8: Light Detection

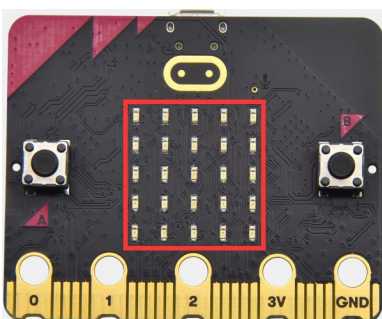

(1)Project Description:

In this project, we focus on the light detection function of the Micro: Bit main board V2. It is achieved by the LED dot matrix. And it can be viewed as a

photosensor.

(2)Components Needed:


- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,


(1)A. Enter "Advanced" → "Serial" → "serial redirect to USB" ;

B. Drag it into "on start" block.

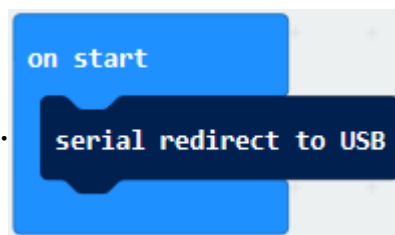

(2) A. Go to "Serial" → "serial write value x =0" ;

B. Move it into "forever"

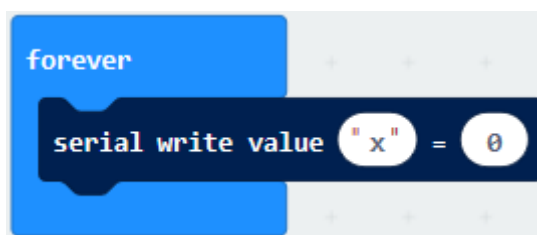

(3) A. Click "Input" → "acceleration(mg) x"

B. Put "acceleration(mg) x" in the "0" box and change "x" into "Light intensity" .



(4) A. Click "Basic" → "pause (ms) 100" ;

B. Lay it down into "forever" and set to 100ms.




Complete Program :

	<p>"on start": command block runs once to start program.</p> <p>Serial redirects to USB</p> <p>The program under the block "forever" runs cyclically.</p> <p>Serial write value "Light intensity" = light level</p> <p>Delay in 100ms</p>
--	---

Select " JavaScript" and "Python" to switch into JavaScript and Python language code:




```
1 serial.redirectToUSB()
2 basic.forever(function () {
3   serial.writeValue("Light intensity", input.lightLevel())
4   basic.pause(100)
5 })
6
```

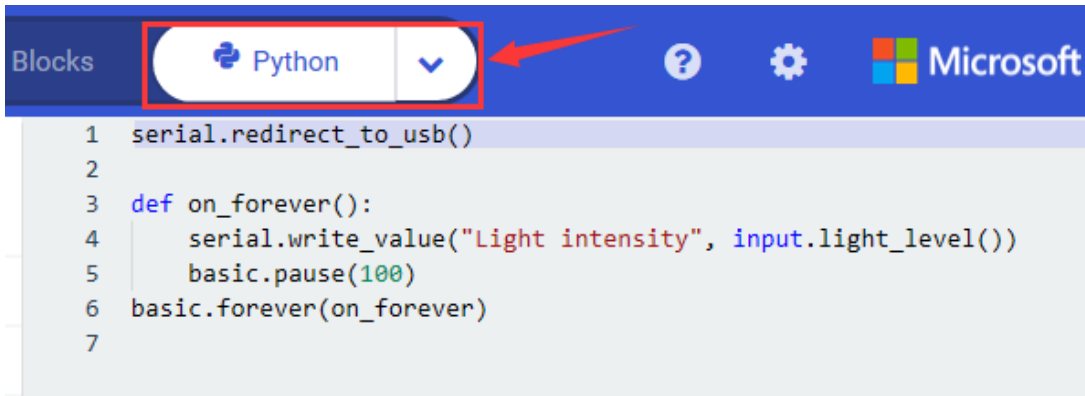


```
1 serial.redirect_to_usb()
2
3 def on_forever():
4   serial.write_value("Light intensity", input.light_level())
5   basic.pause(100)
6 basic.forever(on_forever)
7
```

(4)Test Results:

Upload the test code to micro:bit main board V2, power the board via the USB cable and click "Show console Device" .

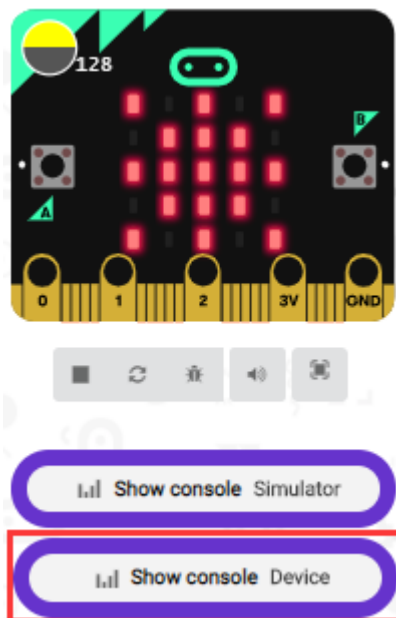

When the LED dot matrix is covered by hand, the light intensity showed is approximately 0; when the LED dot matrix is exposed to light, the light intensity displayed gets stronger with the light as shown below.

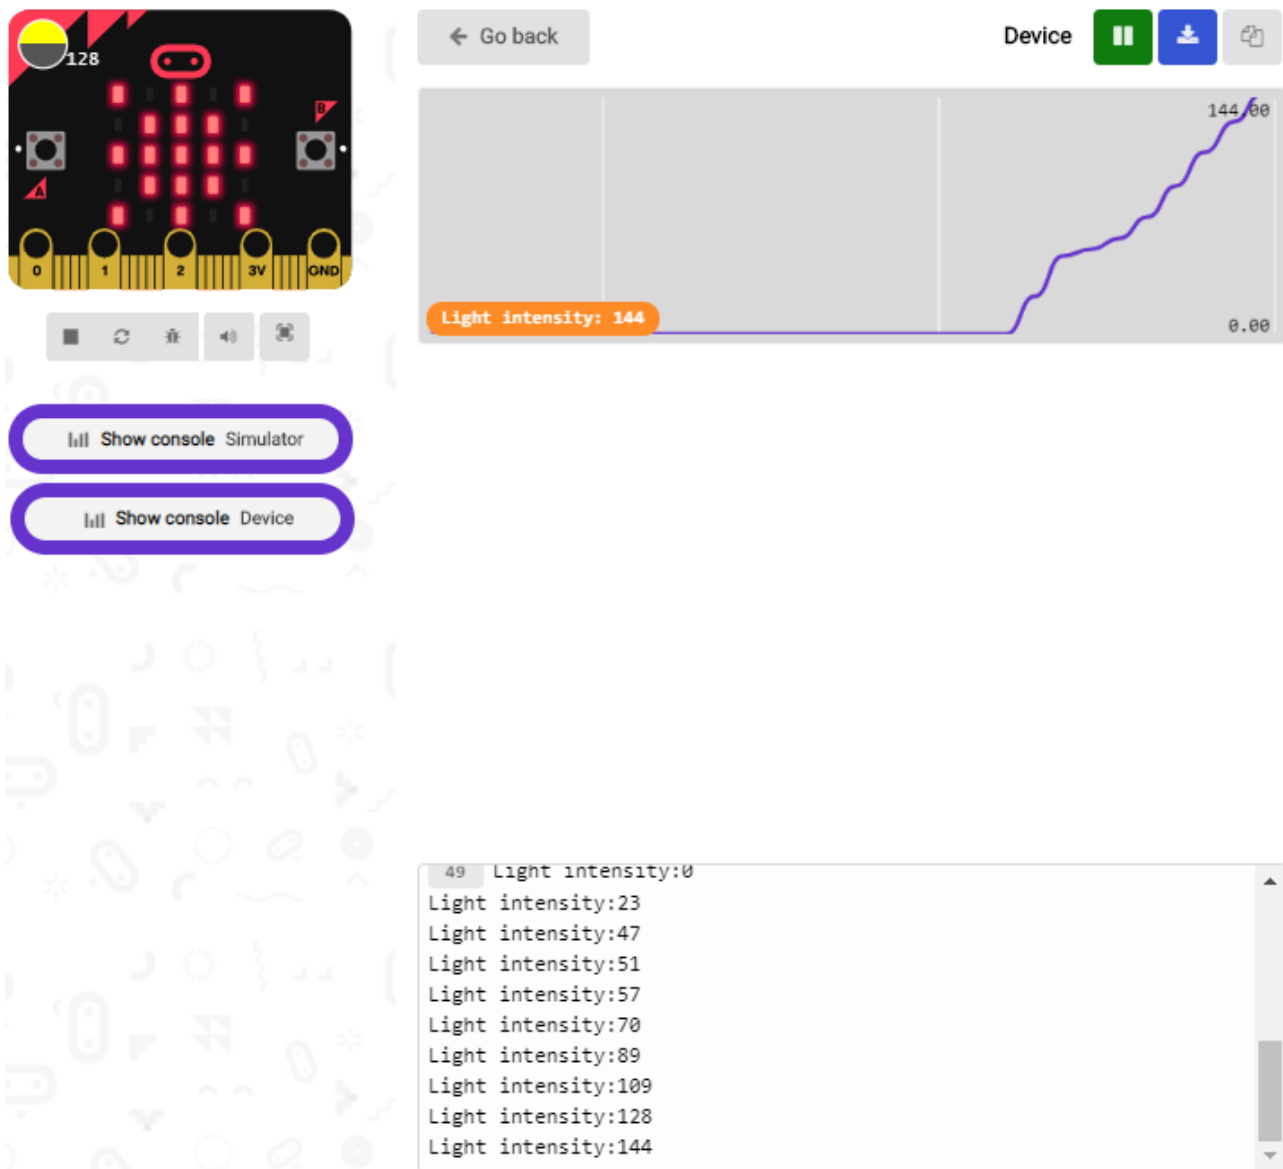


The 20 in the code is an arbitrary value of light intensity. If the current light level is less than or equal to 20, the moon will appear on the LED dot matrix. If it's bigger than 20, the sun will appear.

If you're running Windows 7 or 8 instead of Windows 10, via Google Chrome won't be able to match devices. You'll need to use the CoolTerm serial monitor software to read data.

You could open CoolTerm software, click Options, select SerialPort, set COM

port and baud rate to 115200 (after testing, the baud rate of USB SerialPort communication on Micro: Bit main board V2 is 115200), click OK, and Connect. The CoolTerm serial monitor shows the value of light intensity , as shown in the figures below :

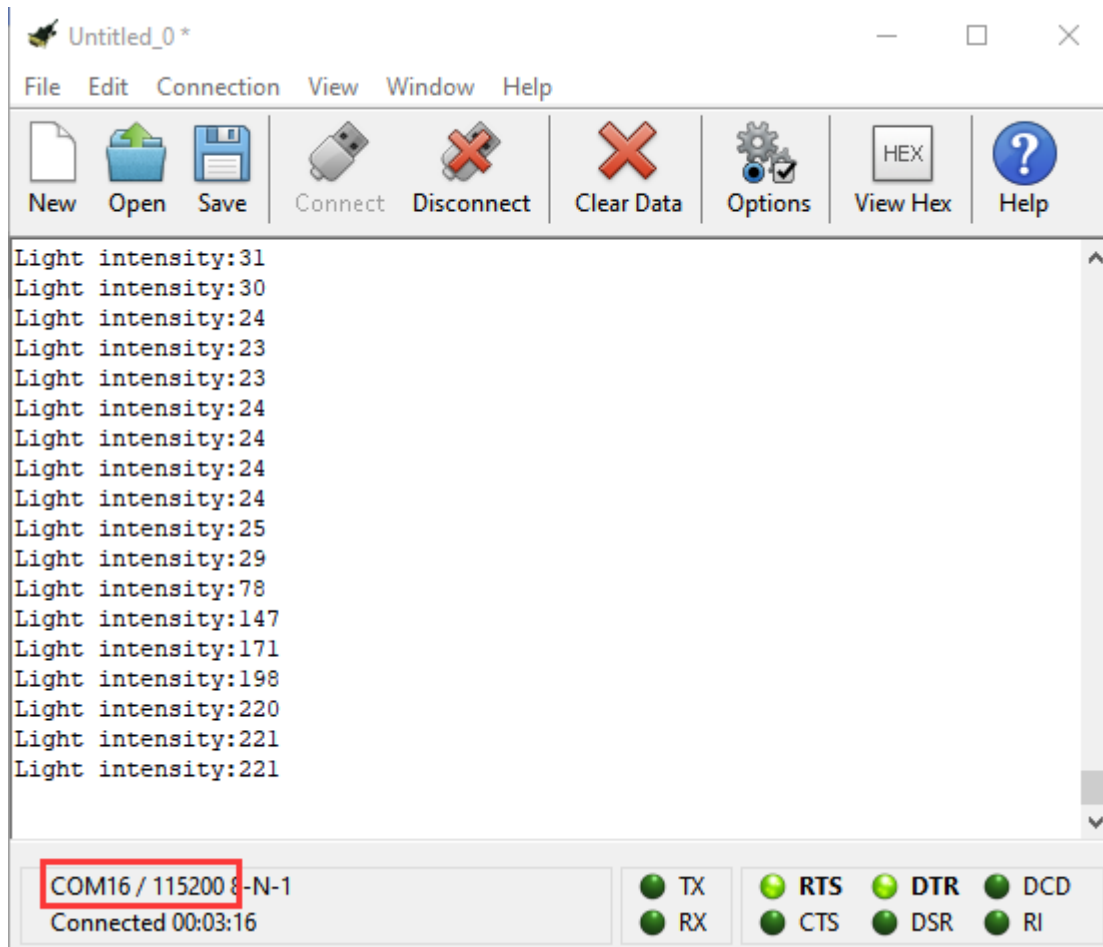

Project 9: Speaker



(1)Project Description:


The Micro: Bit main board V2 has an built-in speaker, which makes adding sound to the programs easier. We can program the speaker to air all kinds of tones .


(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

Enter "Basic" module to find "show icon" and drag it into "on start" block;
Click the little triangle to find 




Enter "Music" module to find and drug "play sound giggle until done" into

“forever” block;

Enter “Basic” module to find and drag “pause(ms) 100” into “forever” block ;

Change 100 into 1000;

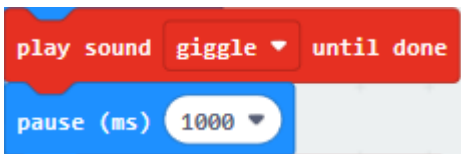

Copy  three times and place it into “forever” block ;

Click the little triangle to select “happy” ,” hello” ,” yawn” ;




Complete Program :



Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



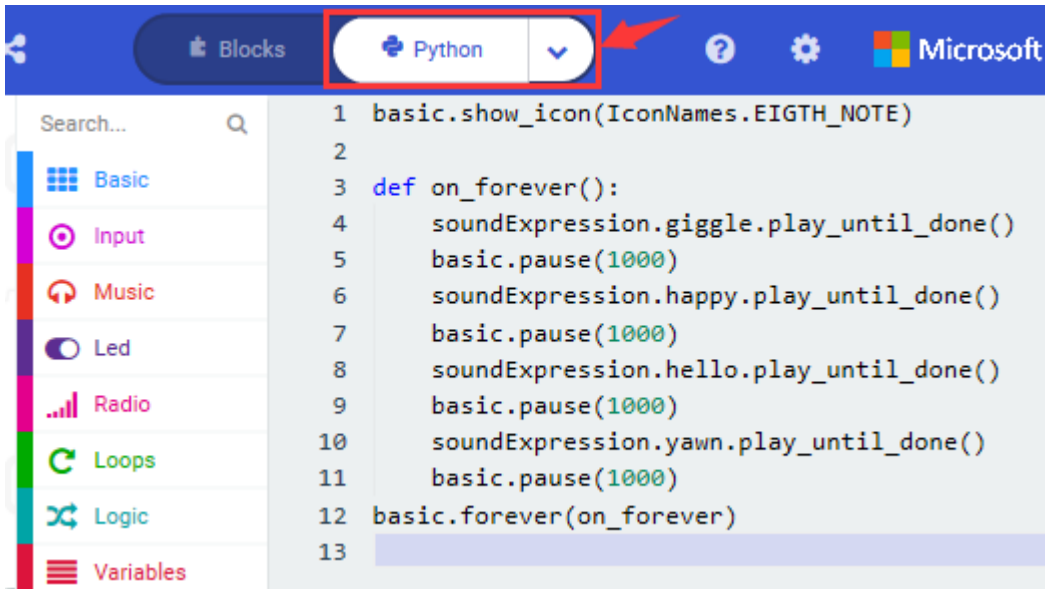


```
1 basic.show_icon(IconNames.EIGHTH_NOTE)
2
3 def on_forever():
4     soundExpression.giggle.play_until_done()
5     basic.pause(1000)
6     soundExpression.happy.play_until_done()
7     basic.pause(1000)
8     soundExpression.hello.play_until_done()
9     basic.pause(1000)
10    soundExpression.yawn.play_until_done()
11    basic.pause(1000)
12 basic.forever(on_forever)
13
```

(4) Test Results:

After uploading the test code to micro:bit main board V2 and powering the board via the USB cable, the speaker utters sound and the LED dot matrix shows the logo of music.

Project 10: Touch-sensitive Logo



(1) Project Description:

The Micro: Bit main board V2 is equipped with a golden touch-sensitive logo, which can act as an input component and function like an extra button.

It contains a capacitive touch sensor that senses small changes in the electric field when pressed (or touched), just like your phone or tablet screen do. When

you press it , you can activate the program.

(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1


(3)Test Code:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

Delete block "on start" and "forever" ;

Enter "Input" module to find and drag "on logo pressed" ;


Click the little triangle to find "touched" ' ;




Enter module "Variables" →choose "Make a Variable" →input "start" →click "OK"


The variable "start" is established;


Enter "Variables" module to find and drag "set start to 0" into "on logo touched" block;



Enter "Input" module → click "more" → find and drag "running time(ms)" into the "0" of "set start to 0" block;

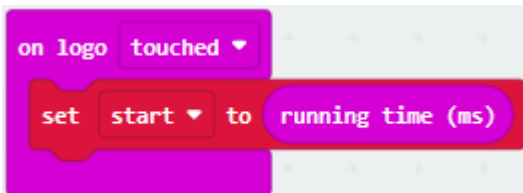

Enter "Basic" module to find and drag "show icon"  into "on logo touched" block;

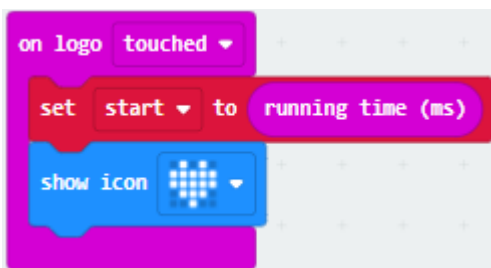

Enter "Input" module to find and drag "on logo pressed" → choose "released" → establish variable "time" ;

Enter "Variables" module to find and drag "set time to 0" into "on logo pressed" block;


Enter "Math" module to find and drag "0-0" into the "0" of "set start to 0"

block;




Enter "Input" module → "more" → find and drag "running time(ms)" into "0" on the left side of "0-0" ;

Enter "Variables" module to find and drag "start" into "0" on the right side of "0-0" ;

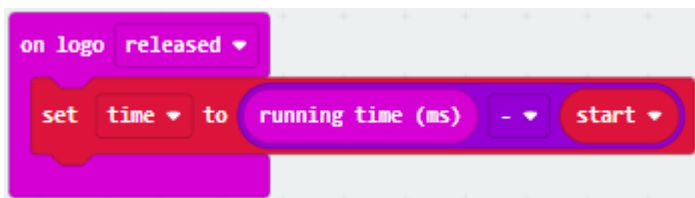

Enter "Basic" module to find and drag "show number" into "on logo released" block;

Enter "Math" module to find and drag "square root 0" into "0" ; Click the little triangle to find "integer ÷" ;

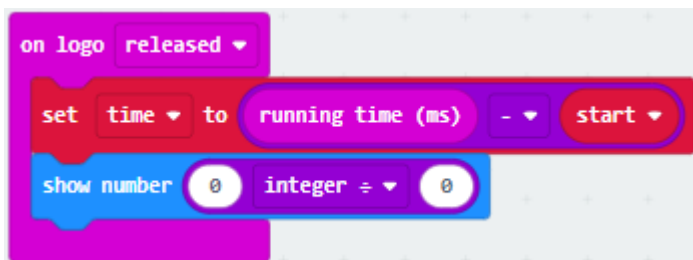

Enter "Variables" module to find and drag "time" into "0" on the left side of "0-0" and change the "0" on the right side to "1000" ;

```
on logo released
  set time to running time (ms) - start
  show number time integer ÷ 1000
```

Complete Program:

```
on logo touched
  set start to running time (ms)
  show icon [grid icon]

on logo released
  set time to running time (ms) - start
  show number time integer ÷ 1000
```

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



```
1 let start = 0
2 let time = 0
3 input.onLogoEvent(TouchButtonEvent.Touched, function () {
4     start = input.runningTime()
5     basic.showIcon(IconNames.Heart)
6 })
7 input.onLogoEvent(TouchButtonEvent.Released, function () {
8     time = input.runningTime() - start
9     basic.showNumber(Math.idiv(time, 1000))
10 })
11
```

```
3
4 def on_logo_touched():
5     global start
6     start = input.running_time()
7     basic.show_icon(IconNames.HEART)
8 input.on_logo_event(TouchButtonEvent.TOUCHED, on_logo_touched)
9
10 def on_logo_released():
11     global time
12     time = input.running_time() - start
13     basic.show_number(Math.idiv(time, 1000))
14 input.on_logo_event(TouchButtonEvent.RELEASED, on_logo_released)
15
```

(4)Test Results:

After uploading the test code to micro:bit main board V2 and powering the board via the USB cable, the LED dot matrix exhibits the heart pattern when the touch-sensitive logo is pressed or touched and displays digit when the logo is released.

Project 11: Microphone

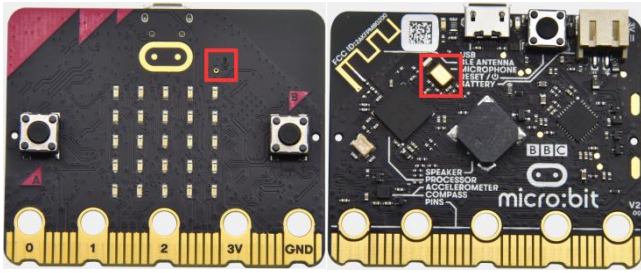

(1)Project Description:

The Micro: Bit main board V2 is built with a microphone which can test the volume of ambient environment. When you clap, the microphone LED indicator will turn on. Since it can measure the intensity of sound, you can make a noise scale or disco lighting changing with music. The microphone is placed on the opposite side of the microphone LED indicator and in proximity with holes that lets sound pass. When the board detects sound, the LED indicator lights up.

(2)Components Needed:

- Micro:bit main board V2 *1
- Micro USB cable*1

(3)Test Code 1:

Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

(1) Delete block "on start" and "forever" ;

(2) Enter "Input" module to find and drag "on loud sound" ;

Enter "Basic" module to find and drag "show number" into "on loud sound" block ;




(3) Copy once;




Click the little triangle of "loud" to choose "quiet" ;



Click the little triangle of "show icon" to choose "show number" ;



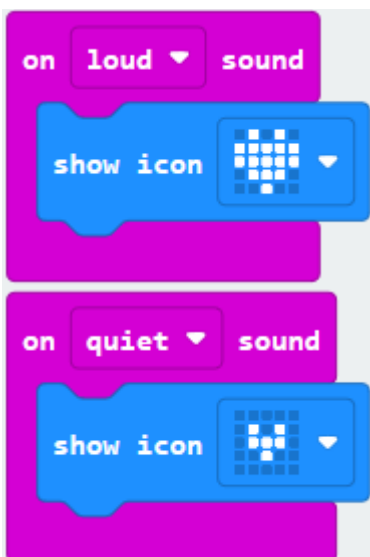

Complete Program:

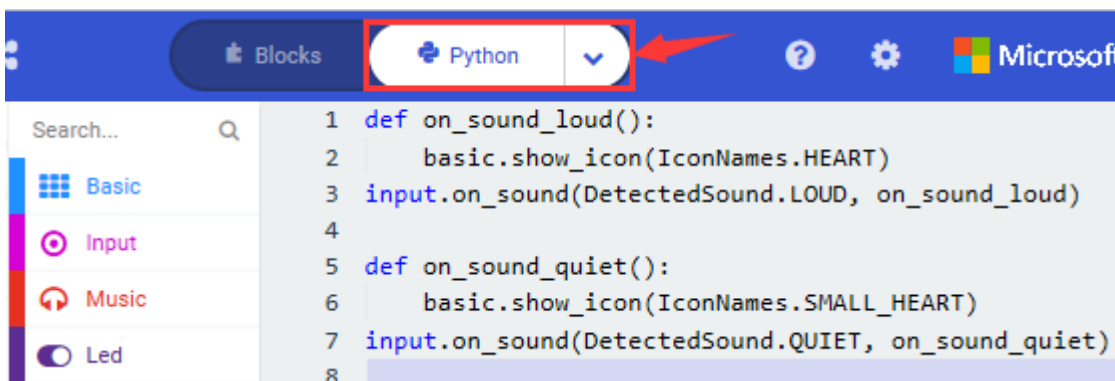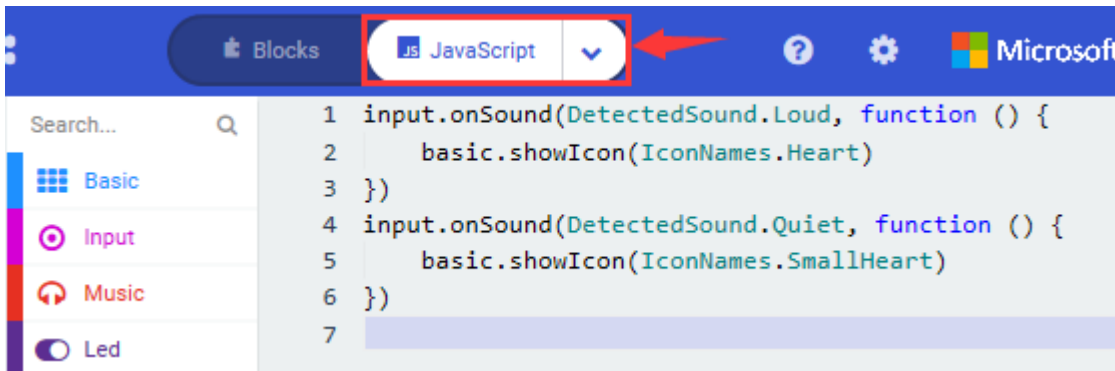

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:




(4) Test Results 1:

After uploading test code to micro:bit main board V2 and powering the board via the USB cable, the LED dot matrix displays pattern "  " when you claps and pattern  when it is quiet around.

(5) Test Code 2:


Link computer with micro:bit board by micro USB cable, and program in MakeCode editor,

Enter "Advanced" module → choose "Serial" to find and drag "serial redirect to USB" into "on start" block ;




Enter "Variables" module → choose "Make a Variable" → input "maxSound" → click "OK" ,variable " maxSound" is established;

Enter "Variables" module to find and drag "set maxSound to 0" into "on start" block ;




Enter "Logic" module to find and drag "if true then...else" into "forever" block ;

Enter "Input" module to find and drag "button A is pressed" into "then" ;

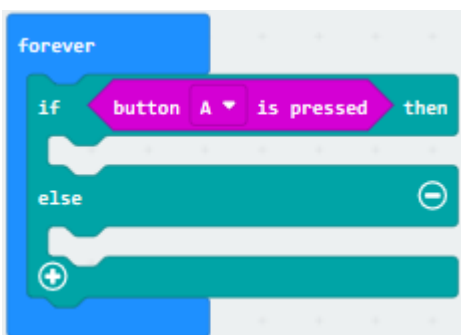

Enter "Basic" module to find and drag "show number" into "then" ;


Enter "Variables" module to find and drag "maxSound" into "0" ;

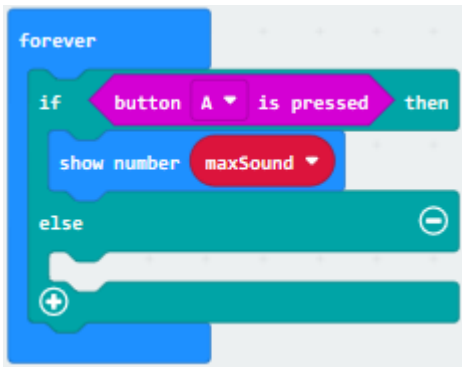

Establish variable "soundLevel" ;

Enter "Variables" module to find and drag "set soundLevel to 0" into "else" ;

Enter "Input" module to find and drag "sound level" into "0" ;

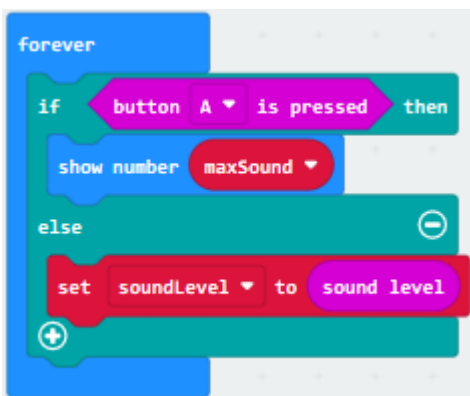

Enter "Led" module to find and drag "plot bar graph of 0 up to 0" into "else" ;

Enter "Variables" module to find and drag "soundLevel" into the "0" behind "of" ;

Change the "0" behind "up" to "255" ;




Enter "Logic" module to find and drag "if true then" into "else" block ;

Enter "Logic" module to find and drag " $0 > 0$ " into "then" ;

Enter "Variables" module to find and drag "soundLevel" into "0" on the left side of "0-0" ;

Enter "Variables" module to find and drag "maxSound" into "0" on the right side;

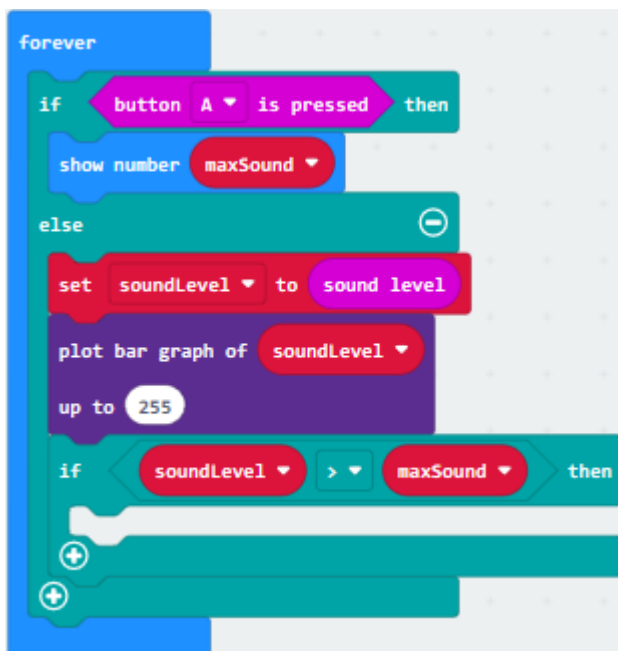

Enter "Variables" module to find and drag "set maxSound to 0" into the second "then" ;

Enter "Variables" module to find and drag "soundLevel" into the "0" ;


```
forever
  if button A is pressed then
    show number maxSound
  else
    set soundLevel to sound level
    plot bar graph of soundLevel
    up to 255
    if soundLevel > maxSound then
      set maxSound to soundLevel
```

Complete Program :


```
on start
  serial redirect to USB
  set maxSound to 0


forever
  if button A is pressed then
    show number maxSound
  else
    set soundLevel to sound level
    plot bar graph of soundLevel
    up to 255
    if soundLevel > maxSound then
      set maxSound to soundLevel
```

Select "JavaScript" and "Python" to switch into JavaScript and Python language code:



The screenshot shows the Microsoft MakeCode IDE interface. The top bar is blue and contains the 'Blocks' menu, a dropdown menu currently set to 'JavaScript', a help icon, a settings icon, and the Microsoft logo. A red box highlights the 'JavaScript' dropdown, with a red arrow pointing to it. On the left side, there is a search bar and a vertical menu with categories: Basic, Input, Music, Led, Radio, Loops, Logic, Variables, Math, and Advanced. The main workspace displays JavaScript code in a light gray background with line numbers 1 through 18. The code is as follows:

```
1 let soundLevel = 0
2 serial.redirectToUSB()
3 let maxSound = 0
4 basic.forever(function () {
5     if (input.buttonIsPressed(Button.A)) {
6         basic.showNumber(maxSound)
7     } else {
8         soundLevel = input.soundLevel()
9         led.plotBarGraph(
10            soundLevel,
11            255
12        )
13        if (soundLevel > maxSound) {
14            maxSound = soundLevel
15        }
16    }
17 })
18
```




The screenshot shows the Microsoft MakeCode IDE interface. The top bar is blue and contains the 'Blocks' menu, a dropdown menu currently set to 'Python', a help icon, a settings icon, and the Microsoft logo. A red box highlights the 'Python' dropdown, with a red arrow pointing to it. On the left side, there is a search bar and a vertical menu with categories: Basic, Input, Music, Led, Radio, Loops, Logic, Variables, Math, and Advanced. The main workspace displays Python code in a light gray background with line numbers 1 through 15. The code is as follows:



```
1 soundLevel = 0
2 serial.redirect_to_usb()
3 maxSound = 0
4
5 def on_forever():
6     global soundLevel, maxSound
7     if input.button_is_pressed(Button.A):
8         basic.show_number(maxSound)
9     else:
10        soundLevel = input.sound_level()
11        led.plot_bar_graph(soundLevel, 255)
12        if soundLevel > maxSound:
13            maxSound = soundLevel
14 basic.forever(on_forever)
15
```

(6)Test Results 2:

Upload test code to micro:bit main board V2, power the board via the USB cable and click "Show console Device" as shown below.

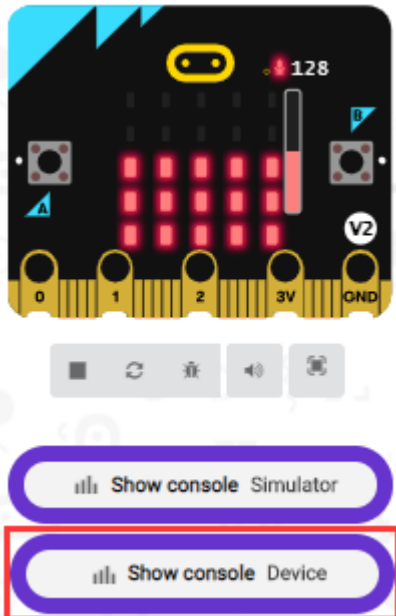

When the sound is louder around, the sound value shows in the serial port is bigger as shown below.

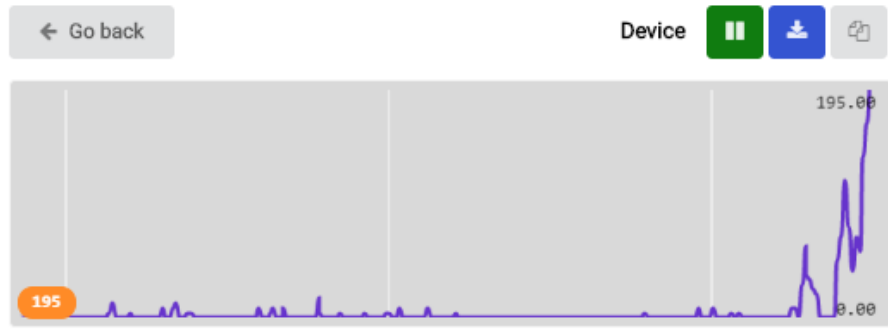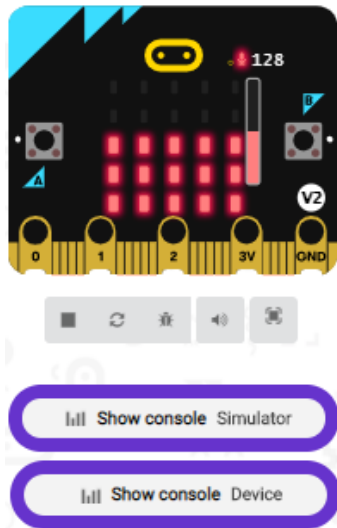

```

95
127
150
153
172
187
183
2 187
191
3 195

```

What's more, when pressing the button A, the LED dot matrix displays the value of the biggest volume(please note that the biggest volume can be reset via the Reset button on the other side of the board) while when clapping, the LED dot matrix shows the pattern of the sound.

Project 12: Bluetooth Wireless Communication



(1)Project Description:

The Micro: Bit main board V2 comes with a nRF52833 processor (with built-in Bluetooth 5.1 BLE(Bluetooth Low Energy) device) and a 2.4GHz antenna for Bluetooth wireless communication and 2.4GHz wireless communication. With the help of them, the board is able to communicate with a variety of Bluetooth devices, including smart phones and tablets.

In this project, we mainly concentrate on the Bluetooth wireless communication function of this main board. Linked with Bluetooth, it can transmit code or signals. To this end, we should connect an Apple device (a phone or an iPad) to the board.

Since setting up Android phones to achieve wireless transmission is similar to that of Apple devices, no need to illustrate again.


(2) Preparation

*Attach the Micro:bit main board V2 to your computer via the Micro USB cable.

*An Apple device (a phone or an iPad) or an Android device;

(3) Procedures:

For Apple devices, enter this link <https://www.microbit.org/get-started/user-guide/ble-ios/> with your computer first, and then click "Download pairing HEX file" to download the Micro: Bit firmware to a folder or desk, and upload the downloaded firmware to the Micro: Bit main board V2.

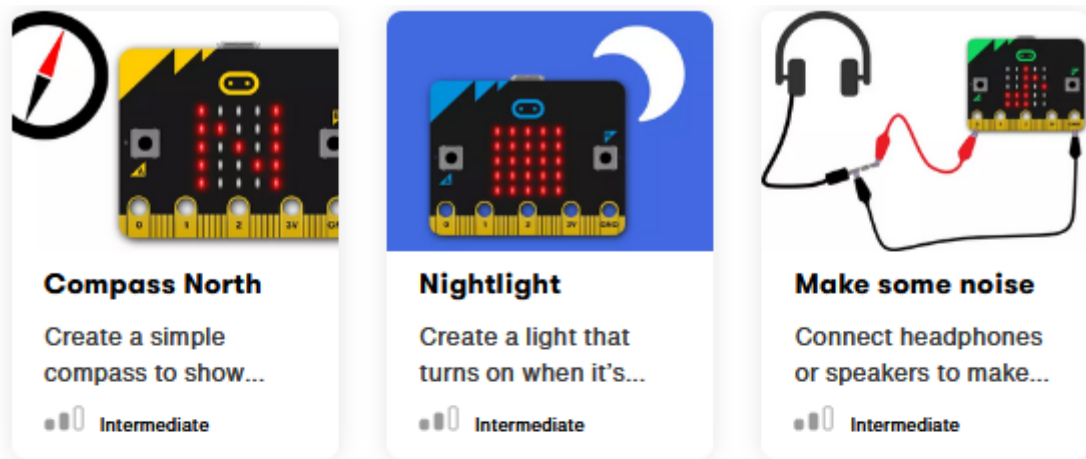

If you need help



If you're having problems flashing code from your iOS device to your micro:bit, download this HEX file and transfer it to your micro:bit from a computer, or visit our support site.




Monitor and control

The 'Monitor and control' section of the iOS app allows you to observe real-time data from the micro:bit sensors, send messages directly to the LEDs and control the micro:bit buttons and pins from your iPad or iPhone.



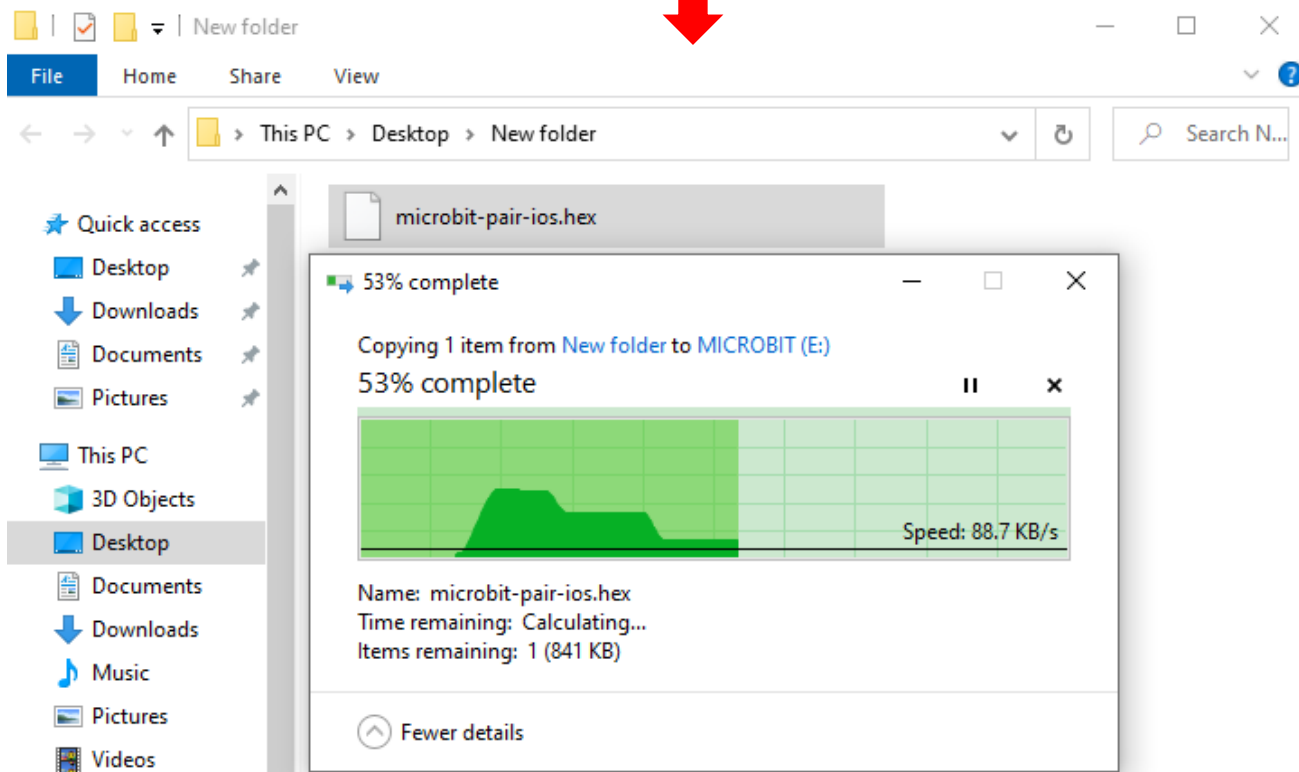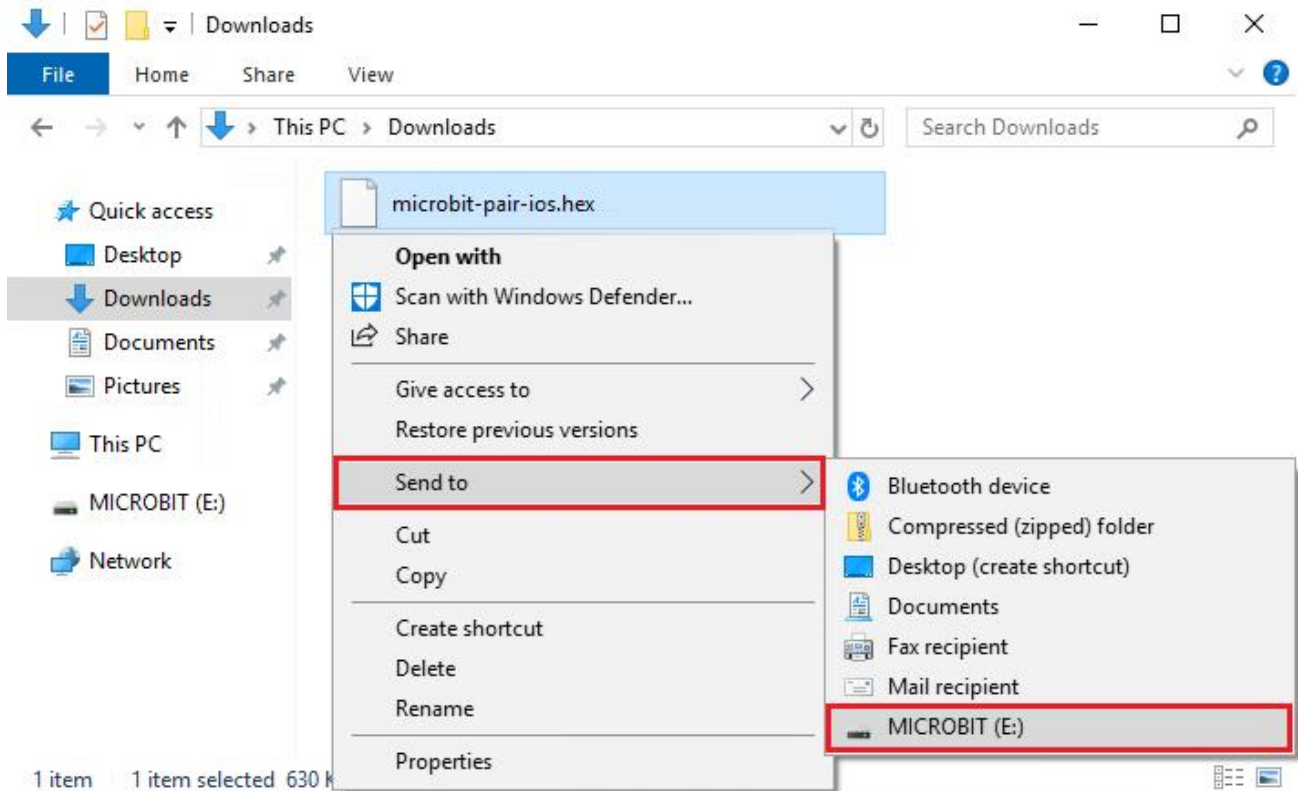


Search "micro bit" in your App Store to download the APP micro:bit.

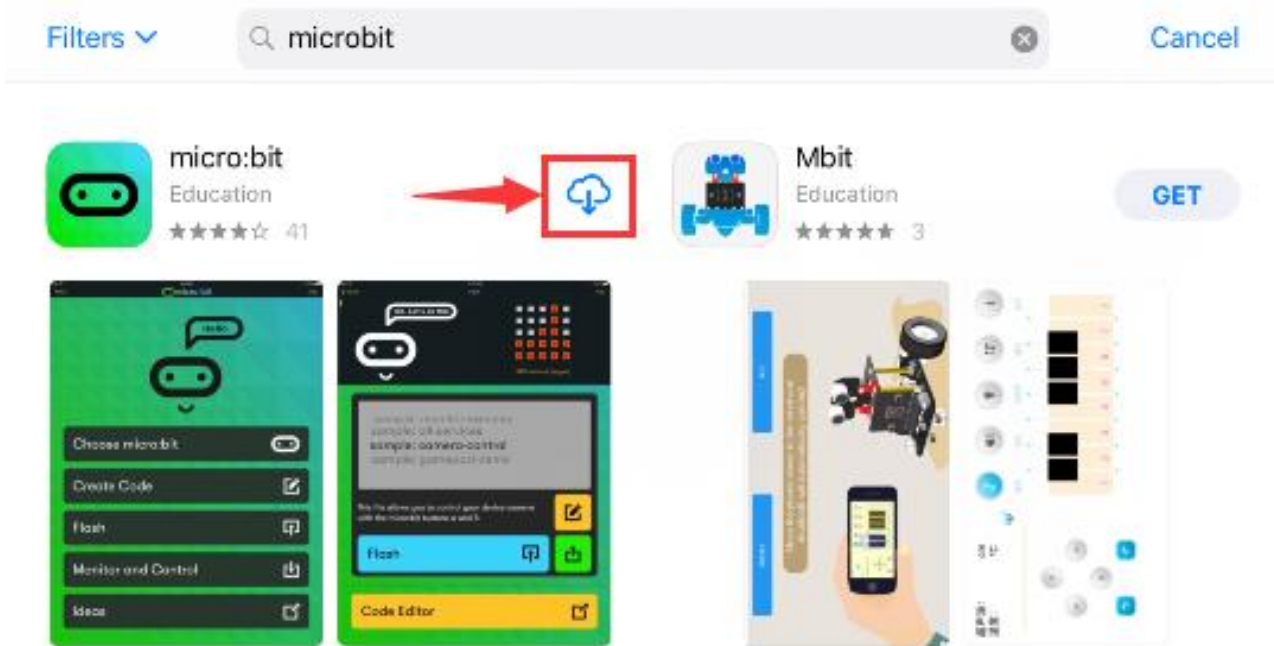


Connect your Apple device with Micro: Bit main board V2:

Firstly, turn on the Bluetooth of your Apple device and open the APP micro:bit to select item "Choose micro:bit" to start pairing Bluetooth.

Please make sure that the Micro: Bit main board V2 and your computer are still linked via the USB cable.

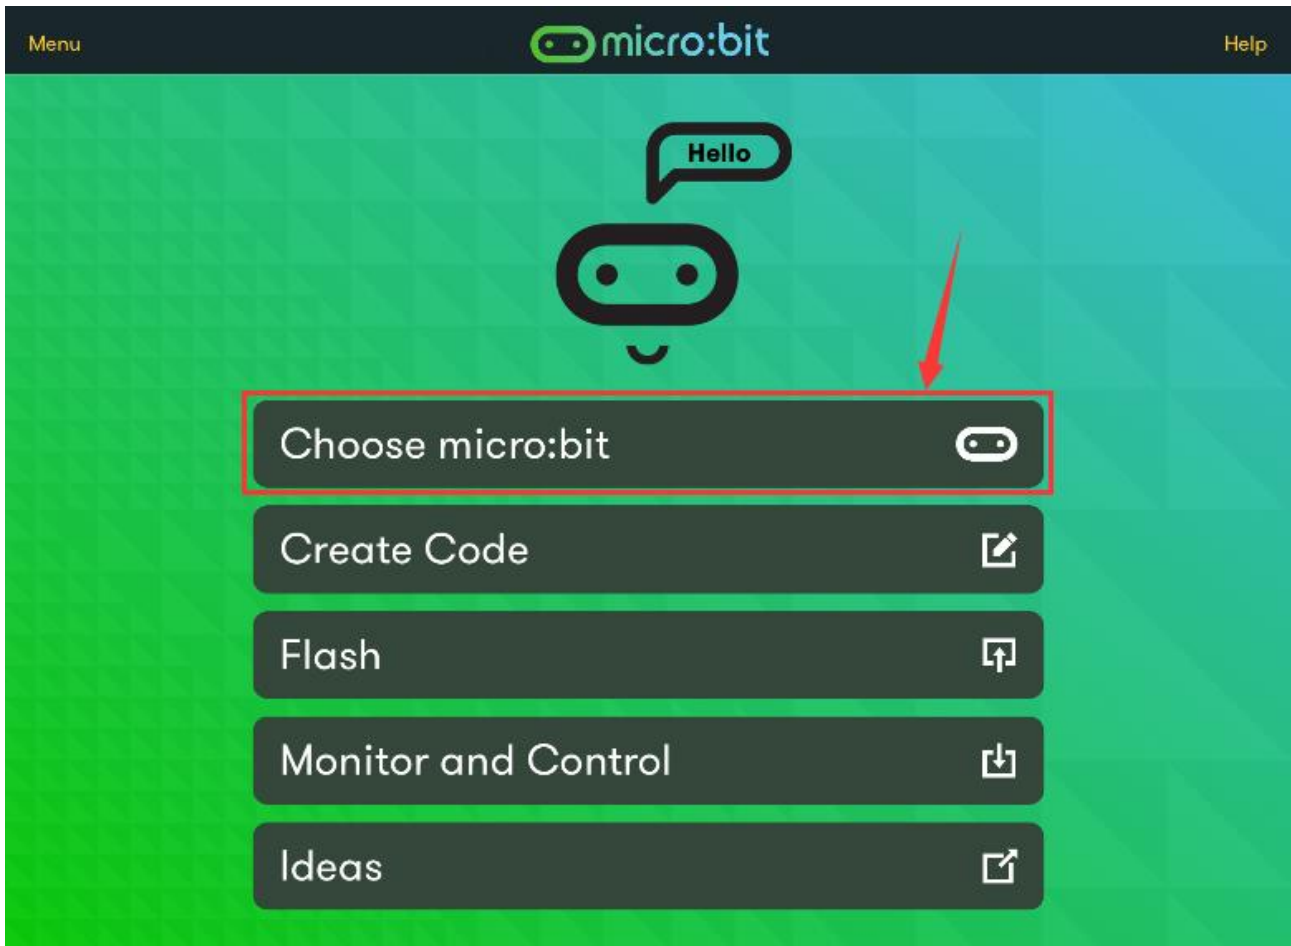


Secondly, click "Pair a new micro:bit" ;

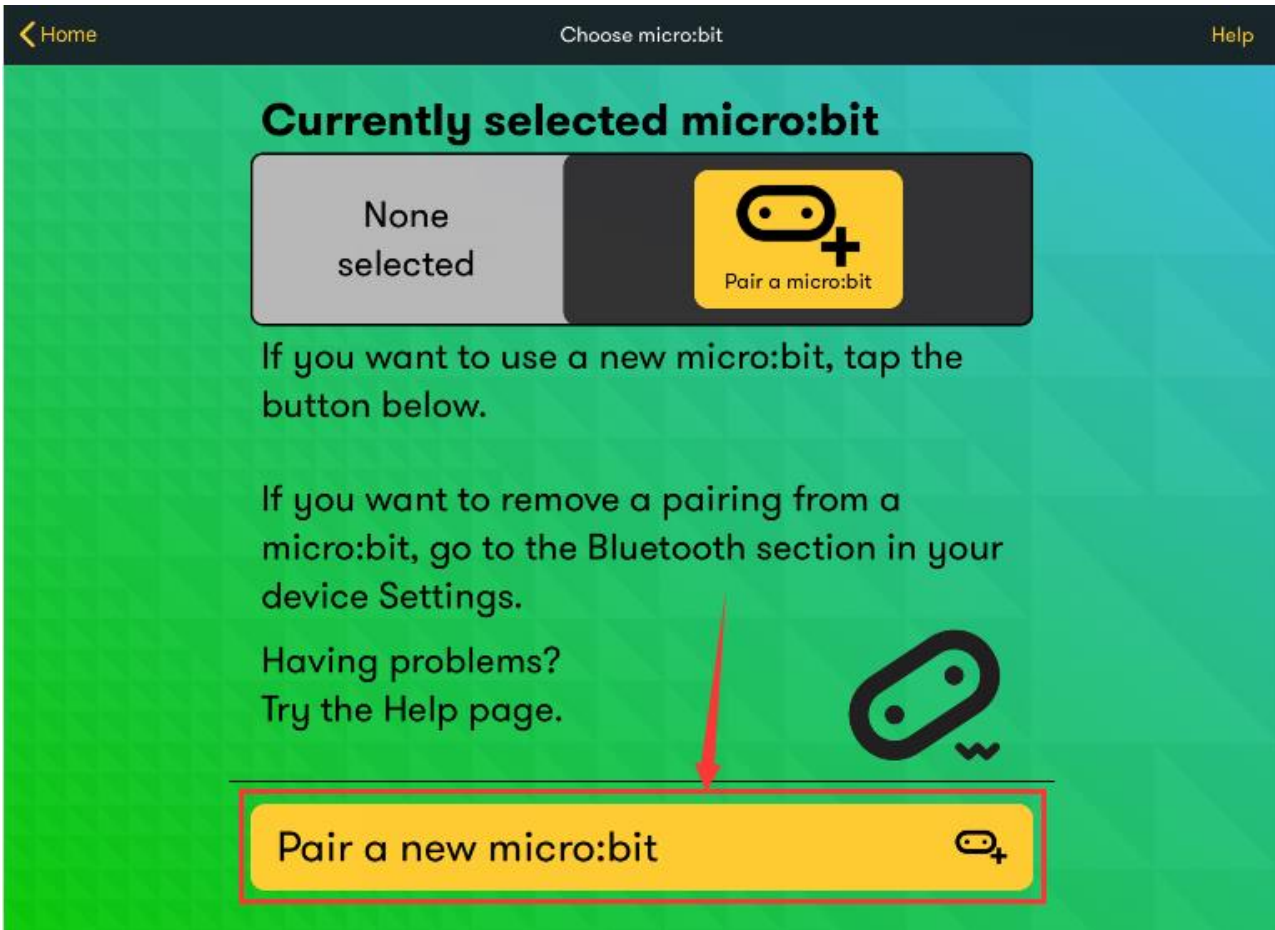

Following the instructions to press button A and B at the same time (do not release them until you are told to) and press Reset & Power button for a few seconds.

Release the Reset & Power button, you will see a password pattern shows on the LED dot matrix. Now, release buttons A and B and click Next.

How to pair your micro:bit

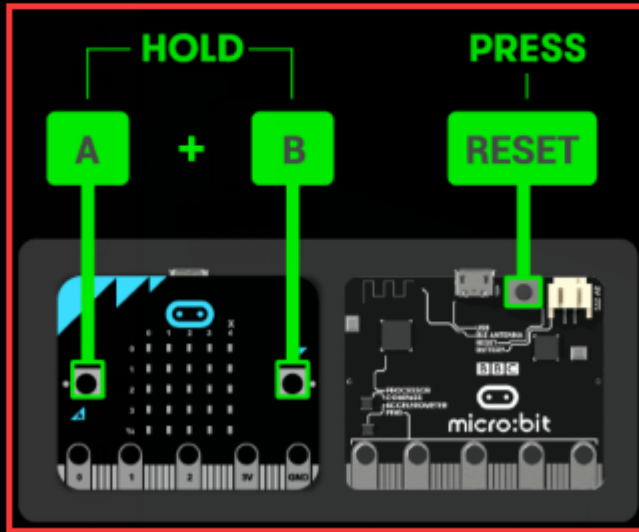

Let's do this

Step 1

HOLD the A and B buttons and
PRESS and RELEASE RESET




Cancel



Next



How to pair your micro:bit

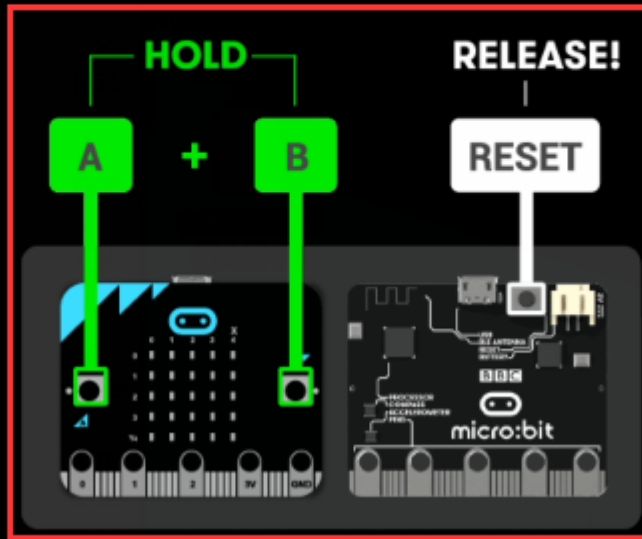

Step 1

HOLD the A and B buttons and
PRESS and RELEASE RESET

Let's do this



Cancel




Next



Set the password pattern on your Apple device as the same pattern showed on

the matrix and click Next.

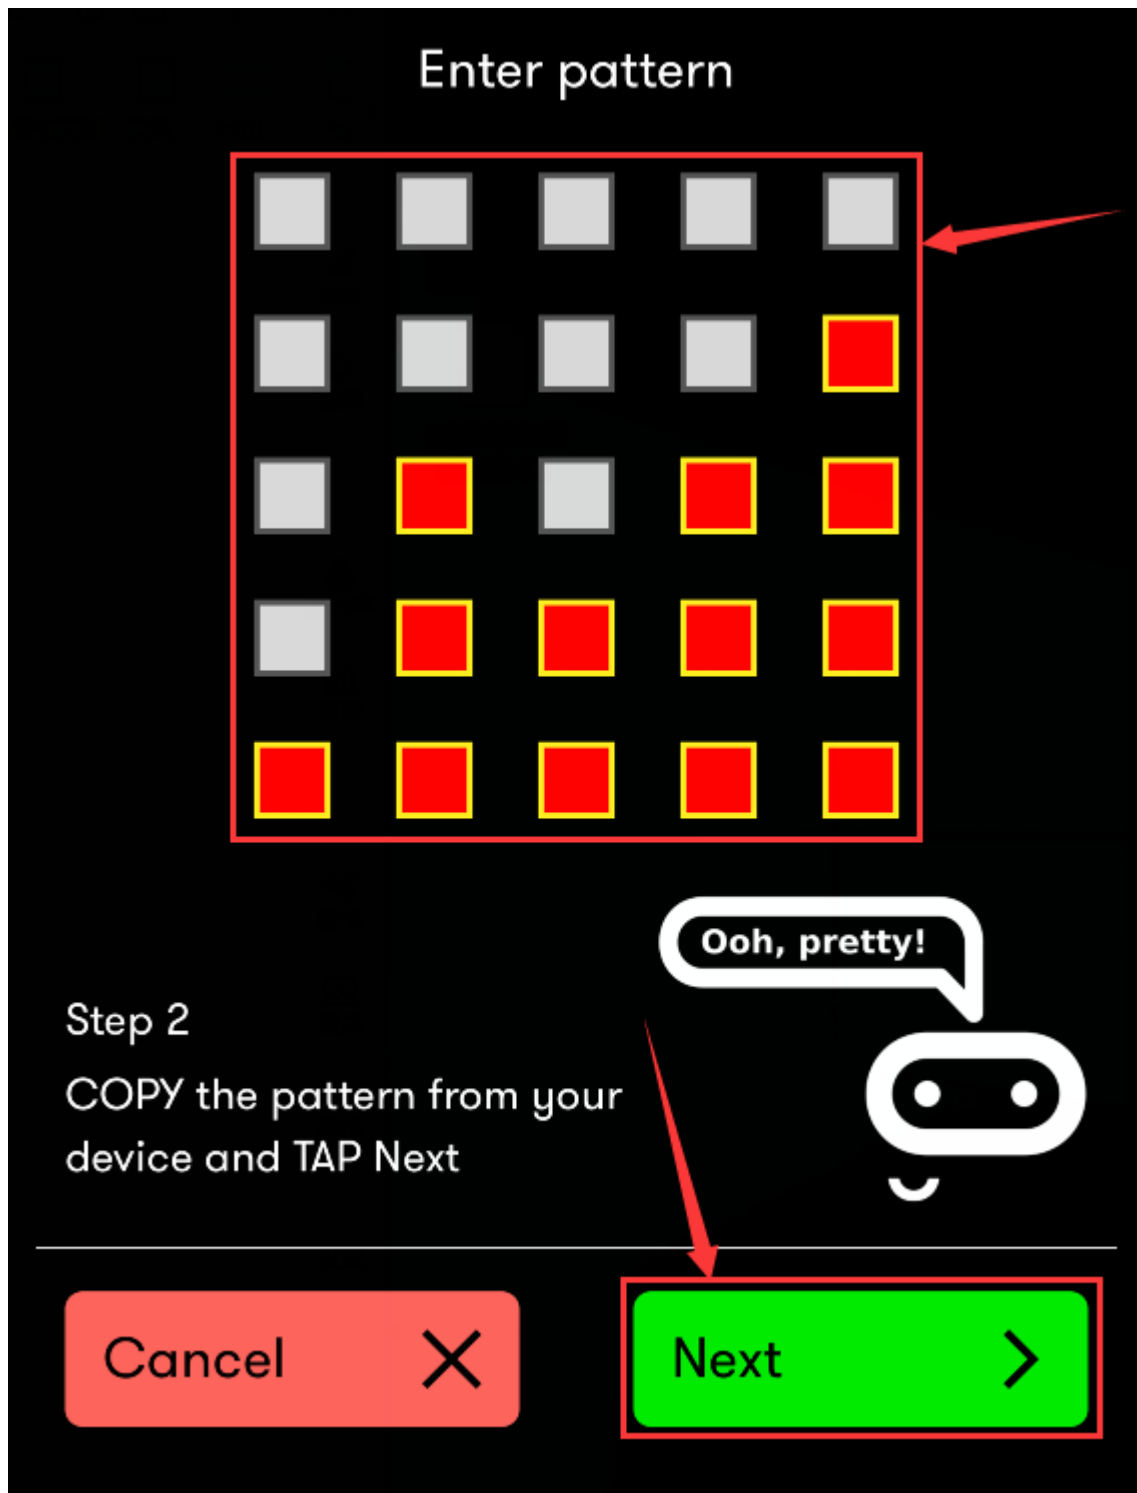

Still click Next and a dialog box props up as shown below. Then click "Pair". A few seconds later, the match is done and the LED dot matrix displays the "√" pattern.

Ready to pair



Let's do this



Tap Next to pair
When asked for a code, PRESS
button A on micro:bit to see it

Cancel



Next



Searching for micro:bit

If the pairing code dialogue doesn't appear within a few seconds, please go to Settings > Bluetooth and "Forget" you

Bluetooth Pairing Request
"BBC micro:bit [zuzut]" would like to pair with your iPad.

Cancel

Pair


Where are you?




Currently searching for
micro:bit. Please wait...

Cancel



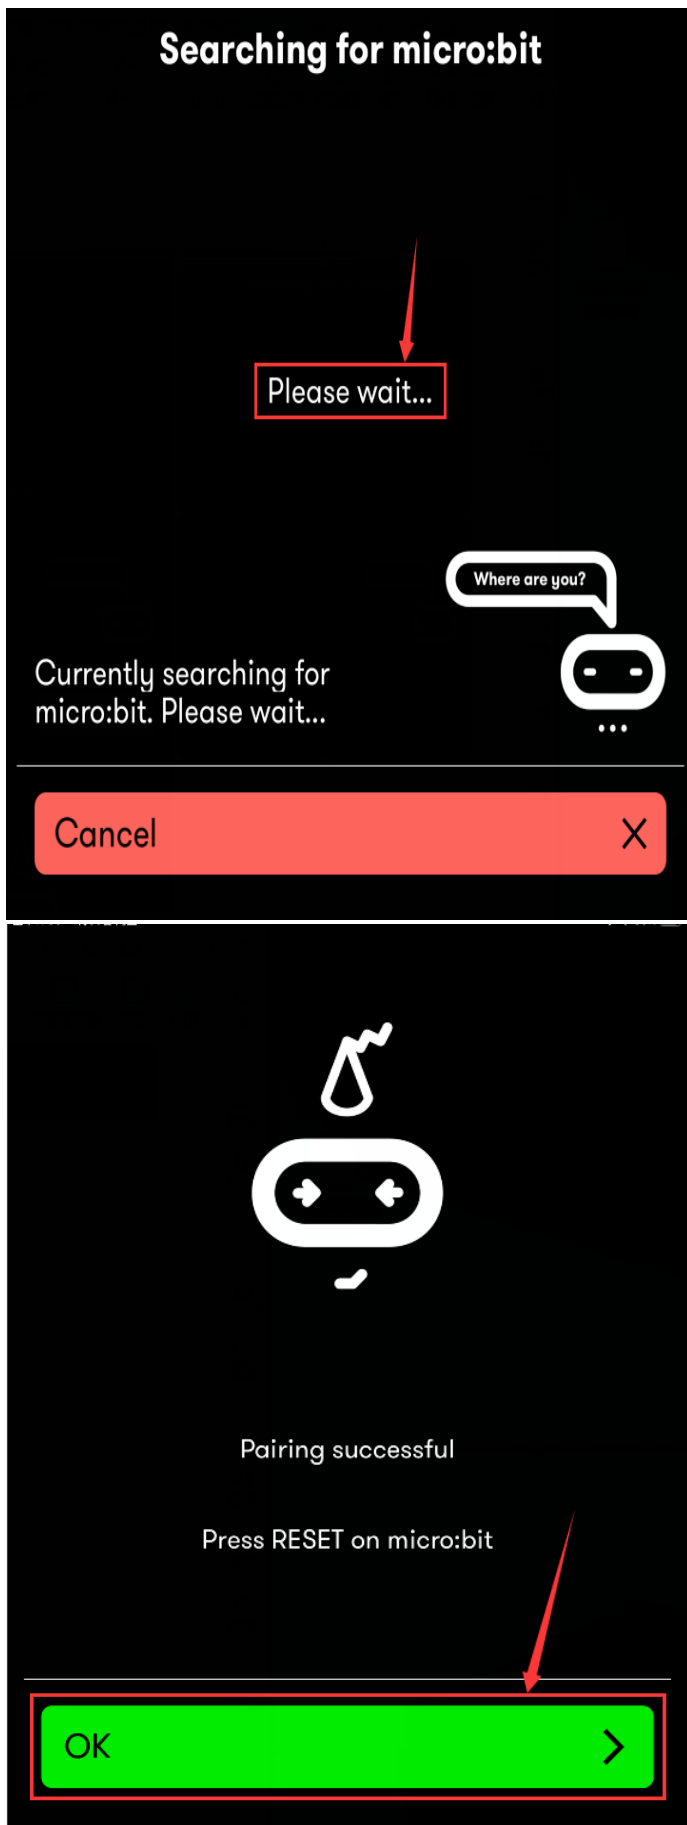

After the match with Bluetooth, write and upload code with the App.
Click "Create Code" to enter the programming page and write code.



Click **New Project** and the box appears, and then select "Create ✓".


Create a Project [Close]



Give your project a name.


[Code options](#)


Create ✓


appears, and then

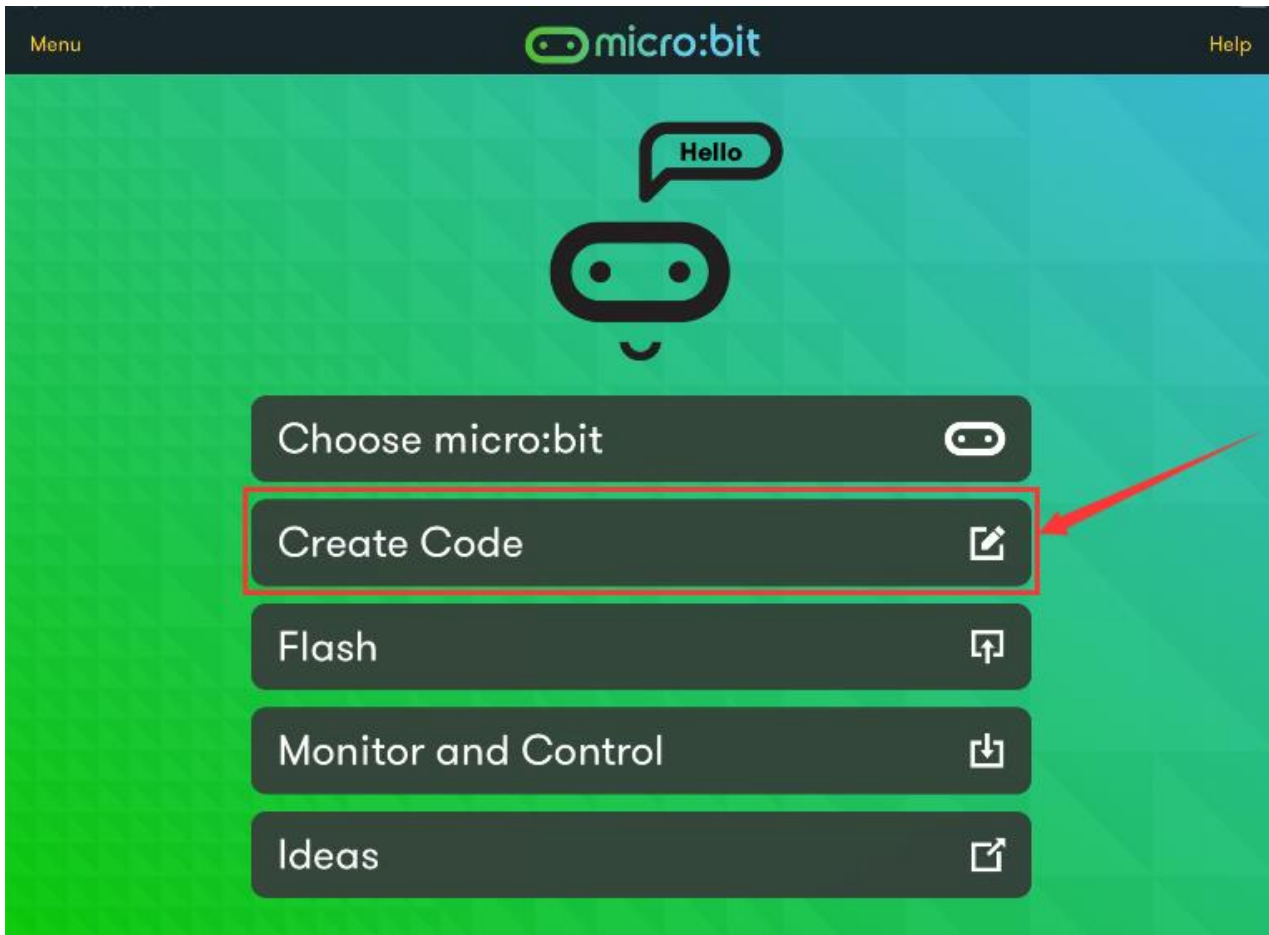

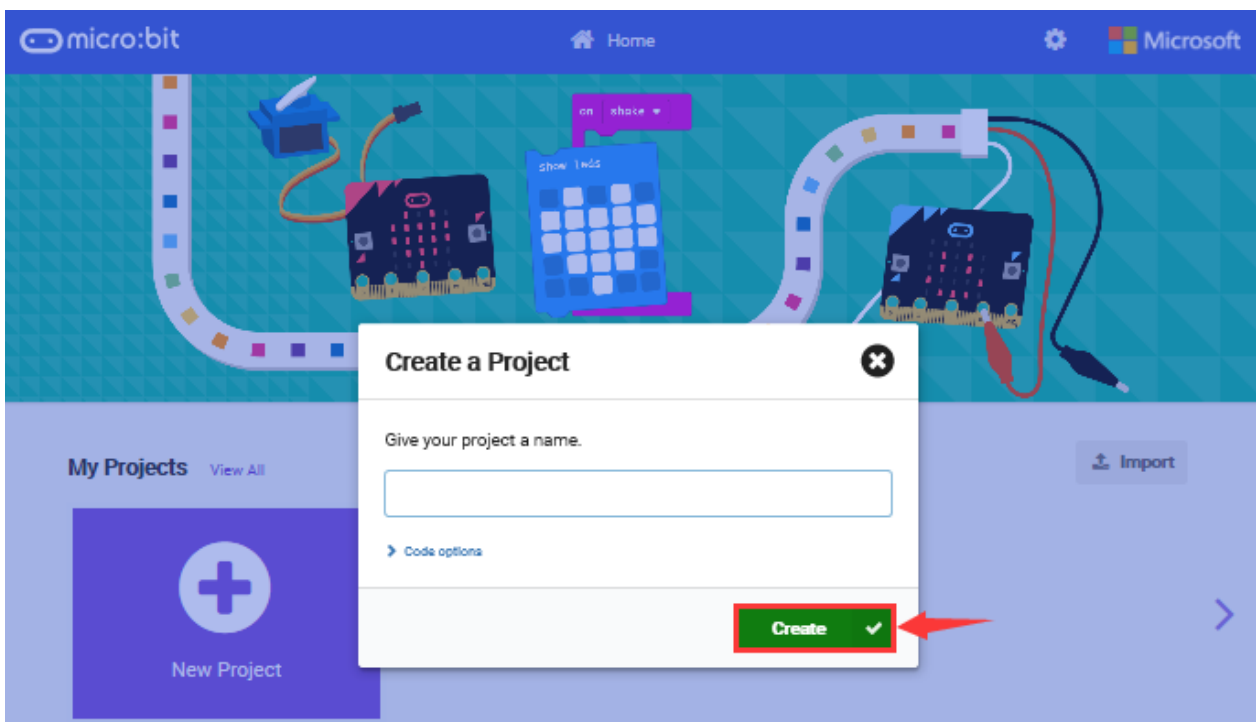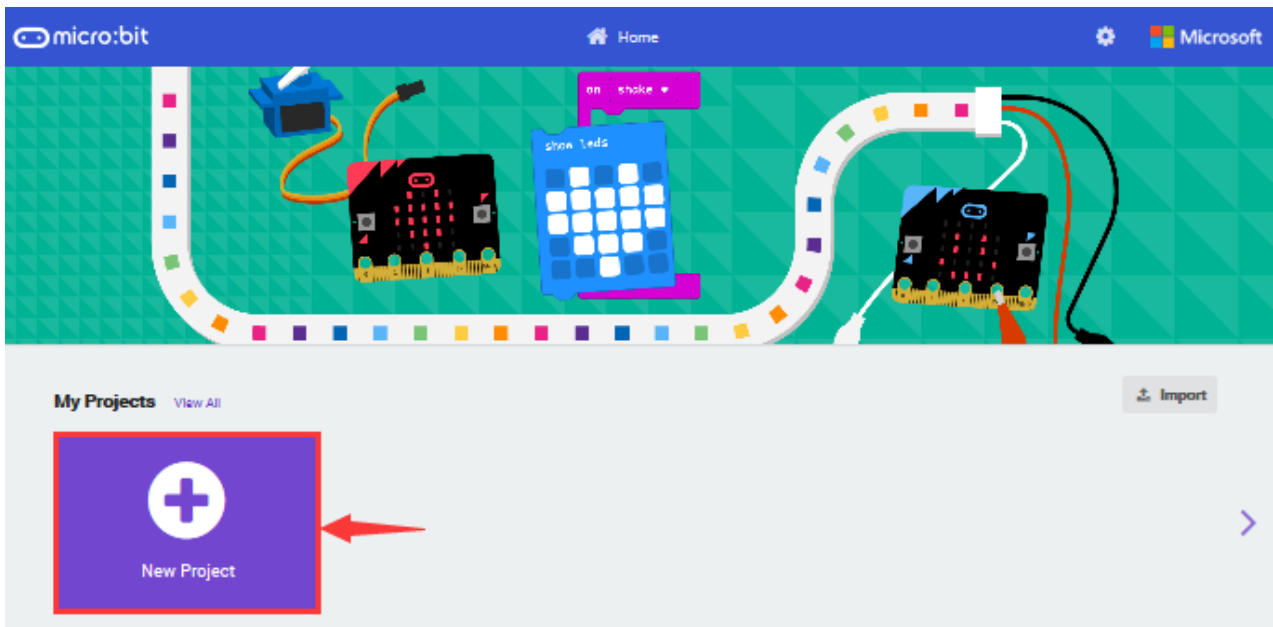

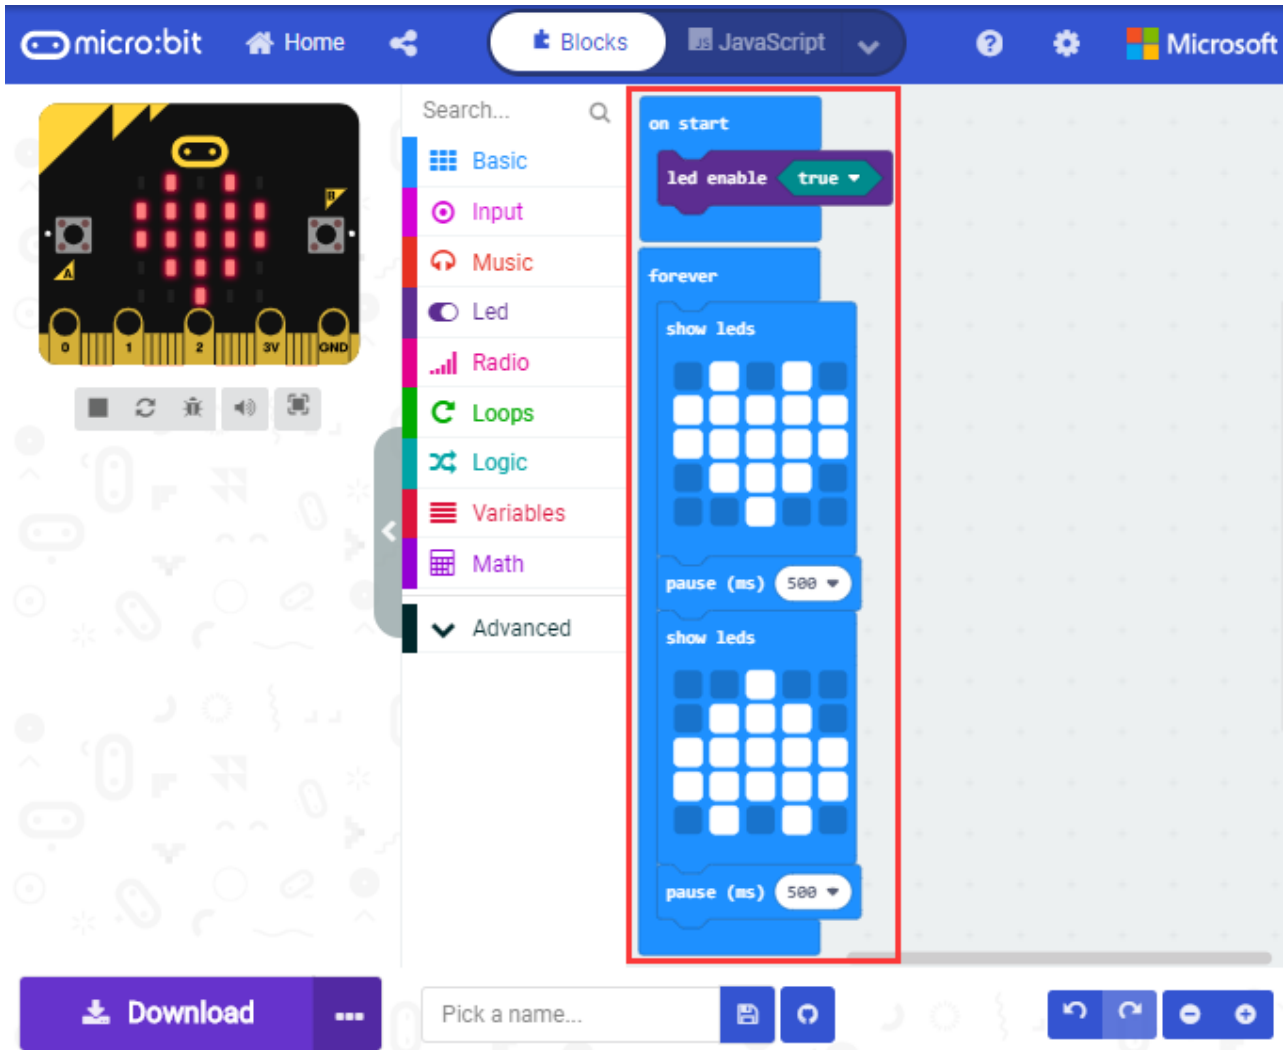

Name the code as "1" and click  to save it.

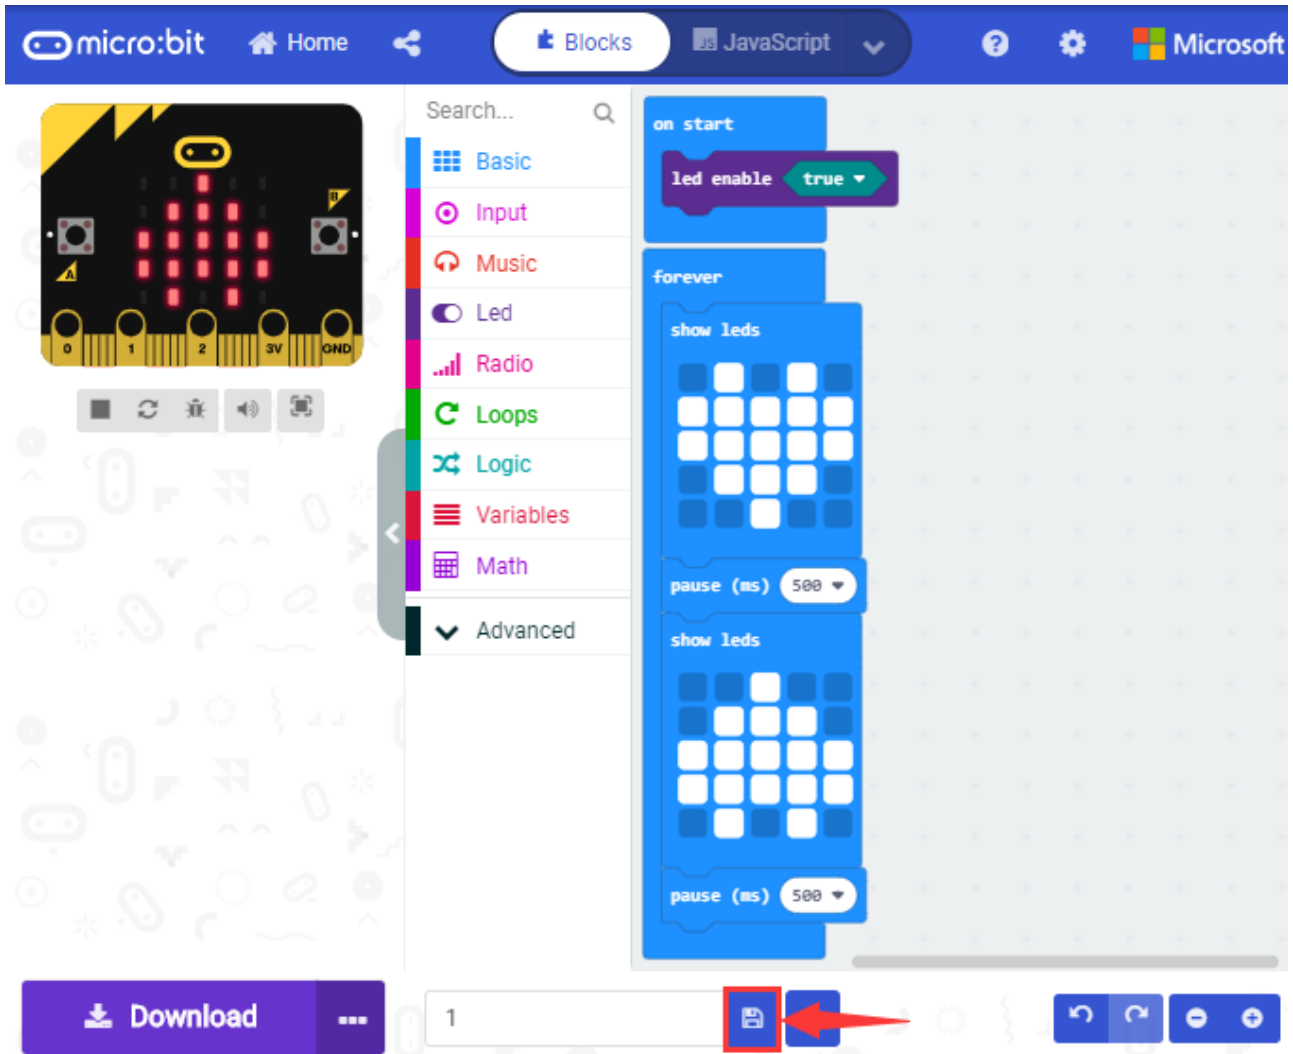

Click the third item "Flash" to enter the uploading page. The default code program for uploading is the one saved just now and named "1" and then click the other "Flash" to upload the code program "1".



Choose micro:bit



Create Code



Flash





Monitor and Control



Ideas



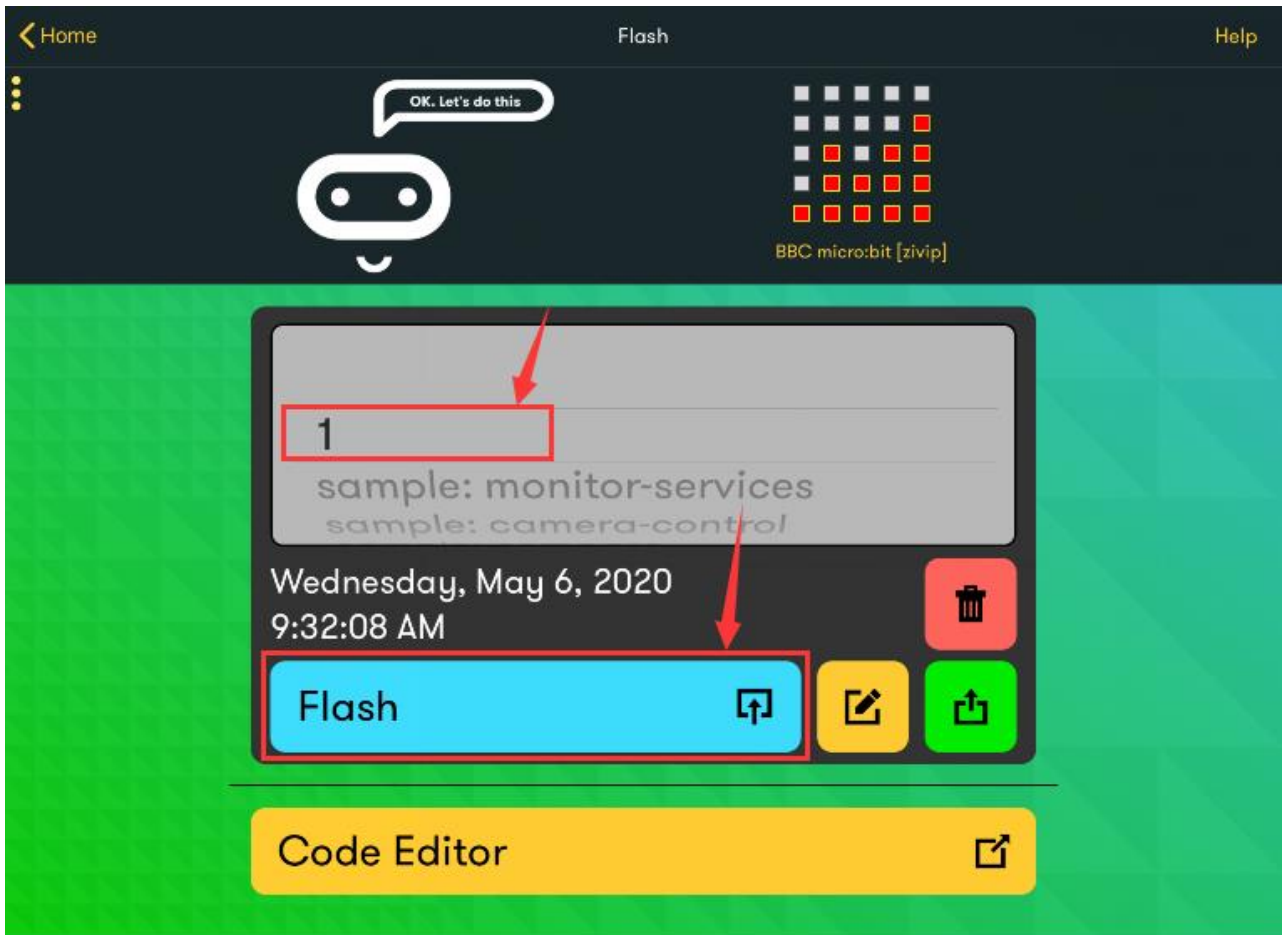

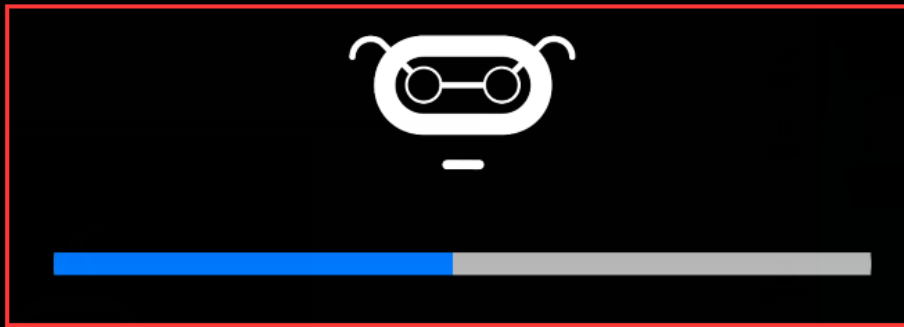

Flashing code to micro:bit

Please do not interact with micro:bit until
the process is complete

Sending...

If the code is uploaded successfully a few seconds later, the App will emerge as below and the LED dot matrix of the Micro: Bit main board V2 will exhibit a heart pattern.



Flashing successful

OK



Note: G , - and GND marked on sensors/modules denote negative poles, which are connected to the G ports of V2 shield ; V, + and VCC indicate the positive electrodes, which are linked with the V1 or V2 ports of V2 shield.

Project 13: Hello world!

Overview

This project is very simple. A micro:bit could display “Hello World!” through a USB cable. This is also an entry experiment for you to enter the programming world of micro bit.


In the experiment, we will serve CoolTerm program as a serial communication software.

Components Required:

Micro:bit main board*1

USB cable*1

Test Code

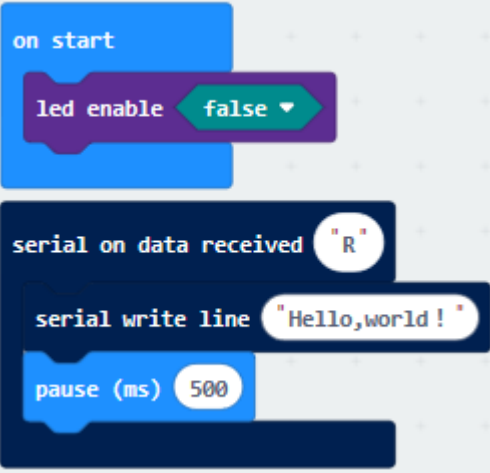

The image shows a Scratch script for a micro:bit. It consists of four blocks: an 'on start' block, an 'led enable' block set to 'false', a 'serial on data received' block with the character 'R', a 'serial write line' block with the text 'Hello,world!', and a 'pause (ms)' block set to 500.

“on start” : command block only runs once to start program.

Turn off LED matrix

Serial transmits data when receiving “R”

Input “Hello,world!” into serial port

Delay in 500ms


Test Results


Connect micro:bit to computer via USB cable and transfer code to micro:bit.


Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.



Tap “Capslock” to set to capital mode and press “R” on keyboard, as a result,

“ Hello World! ” will be displayed as below:

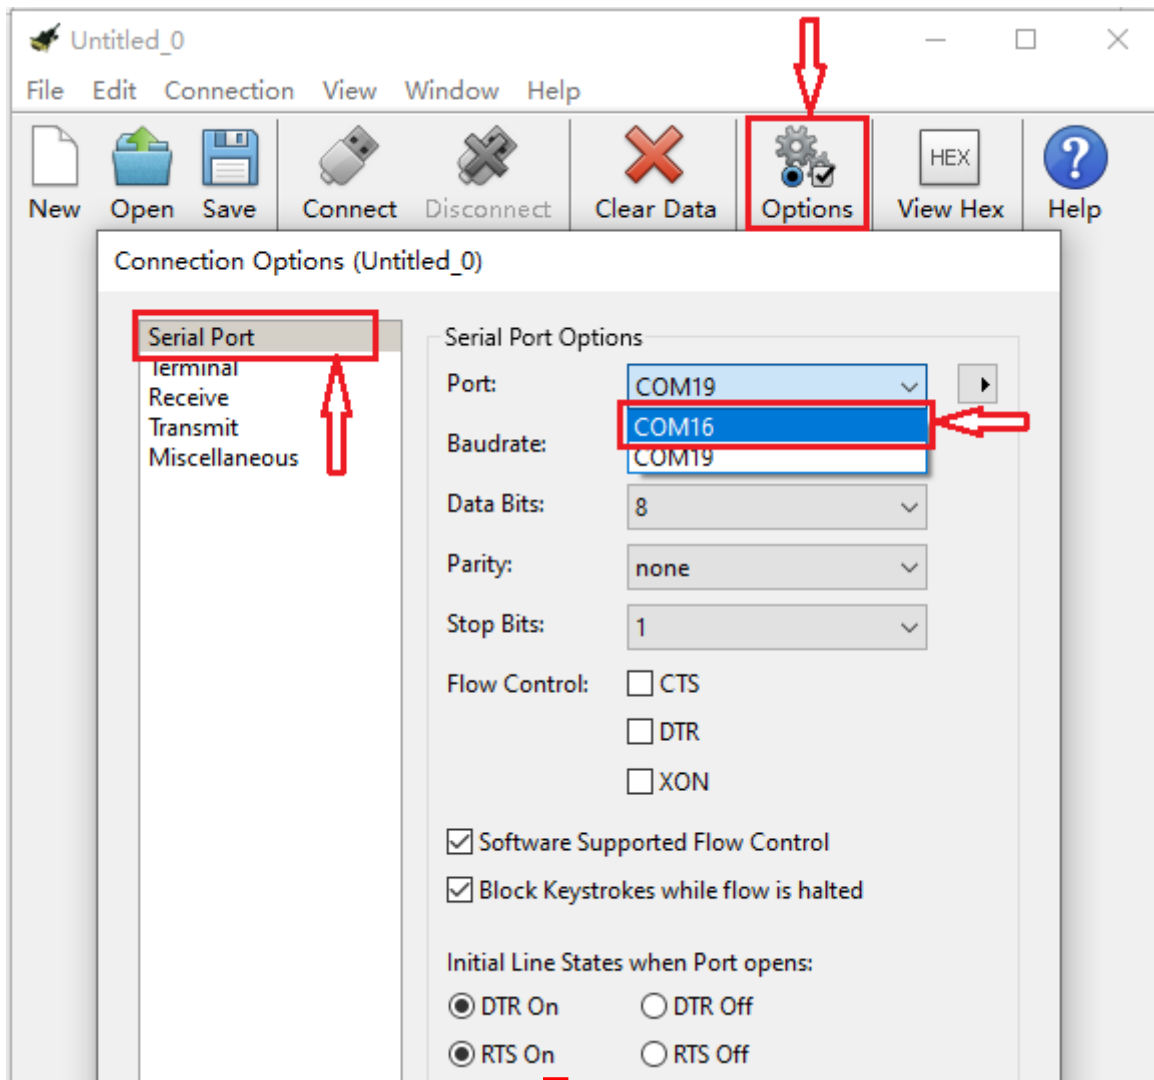

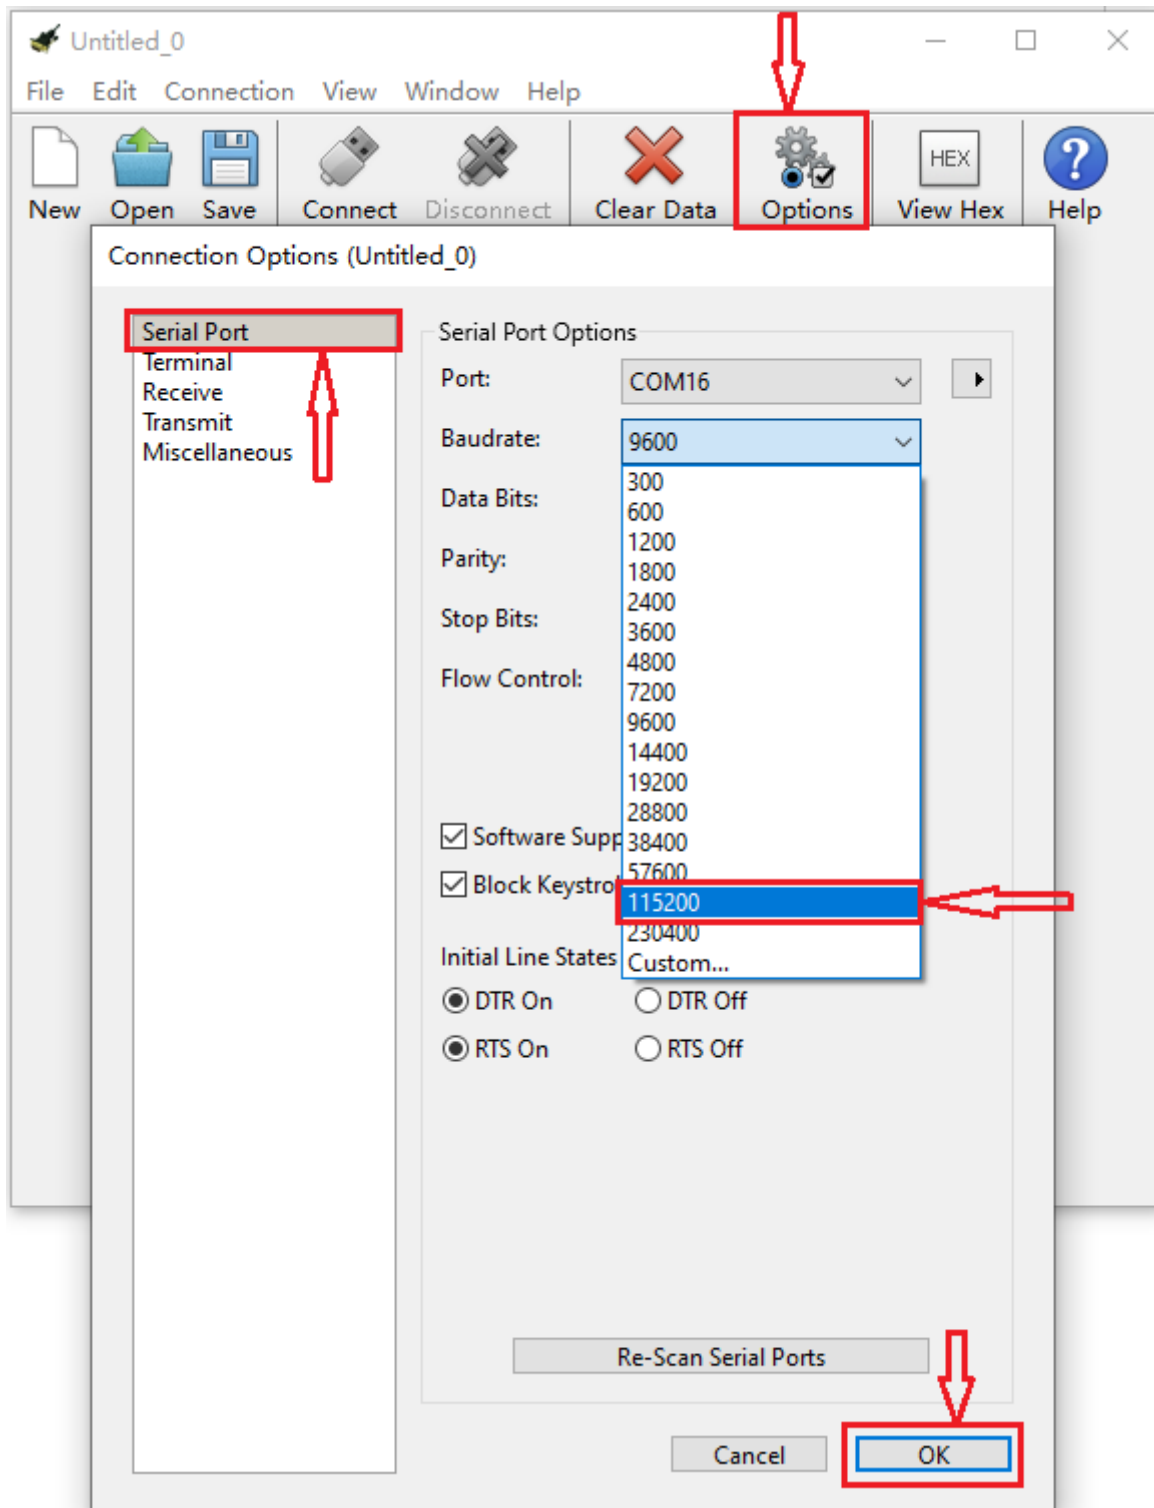

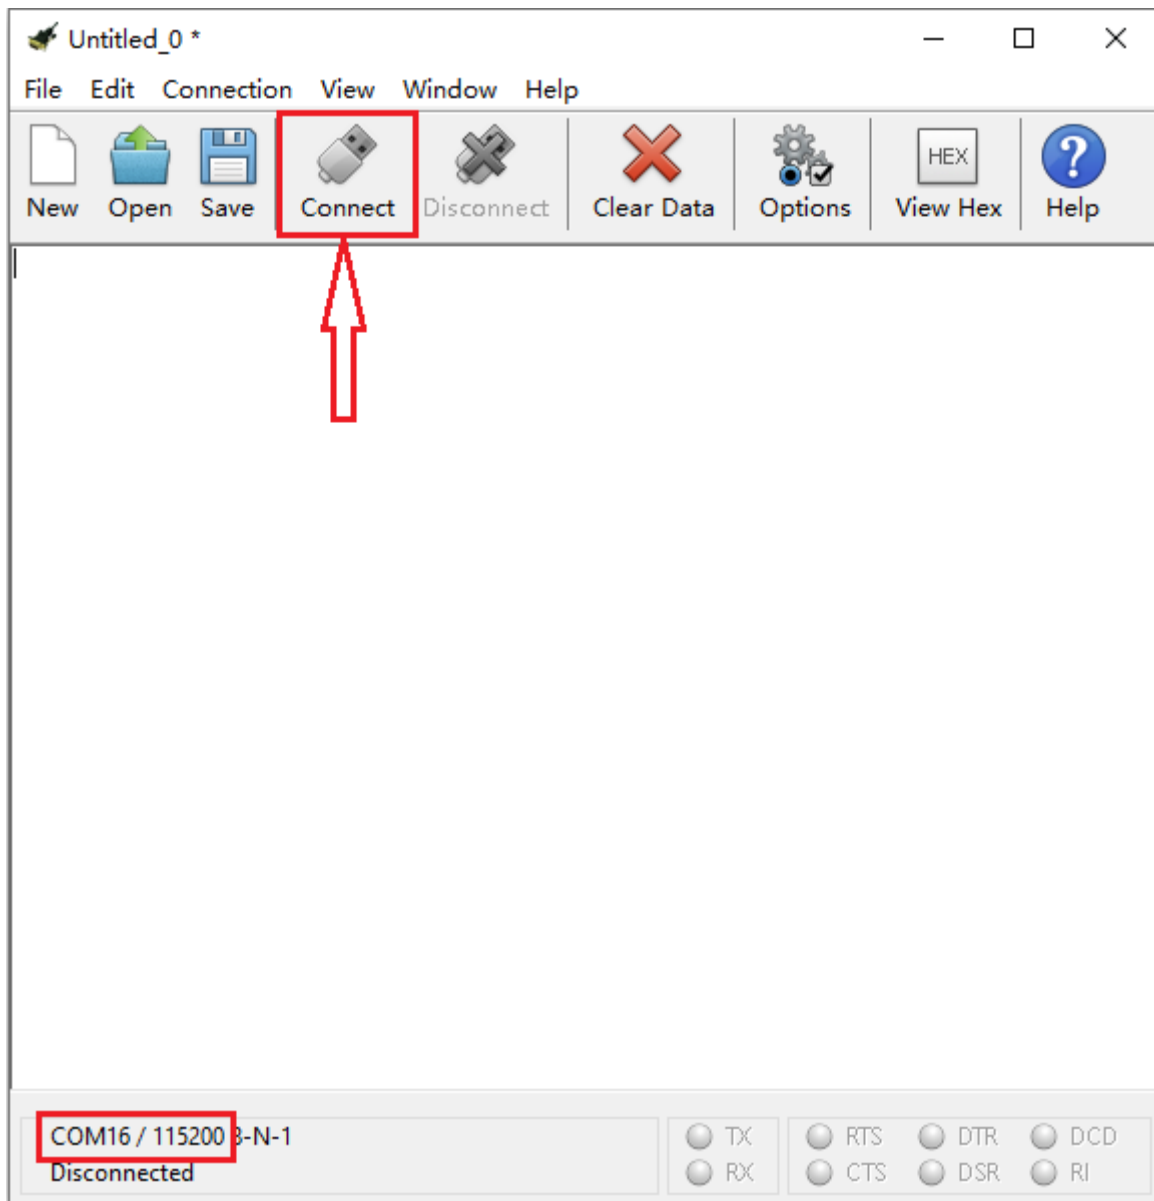

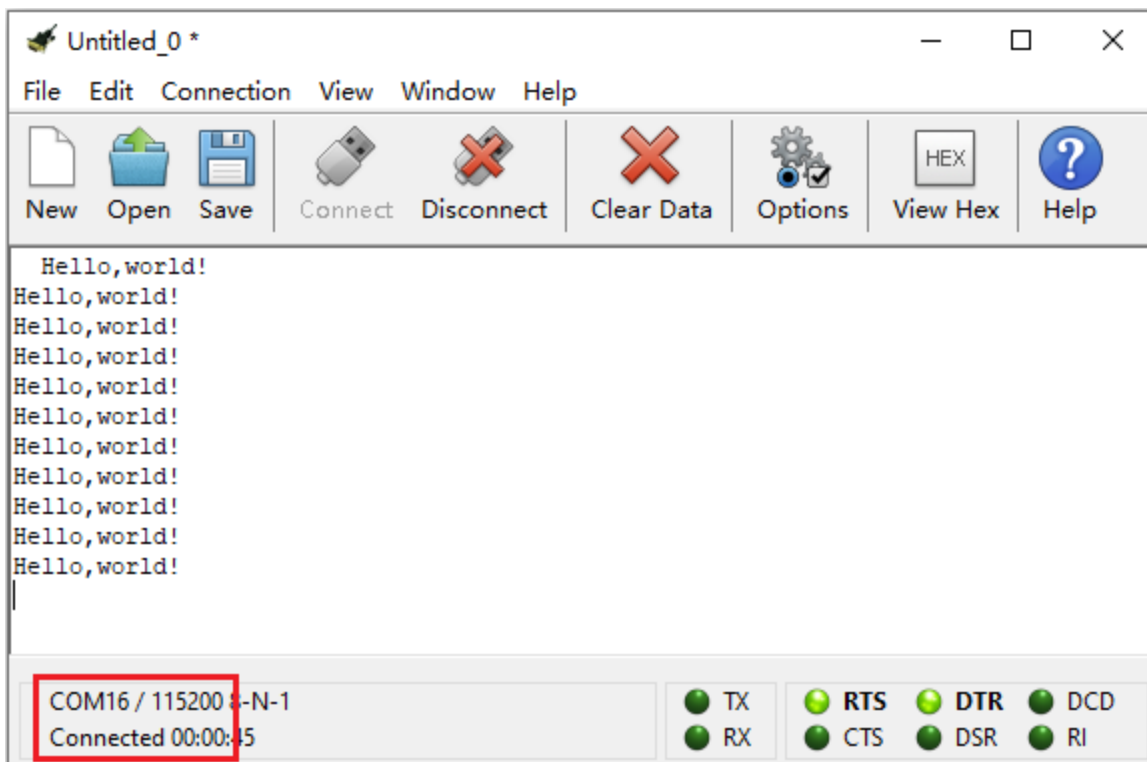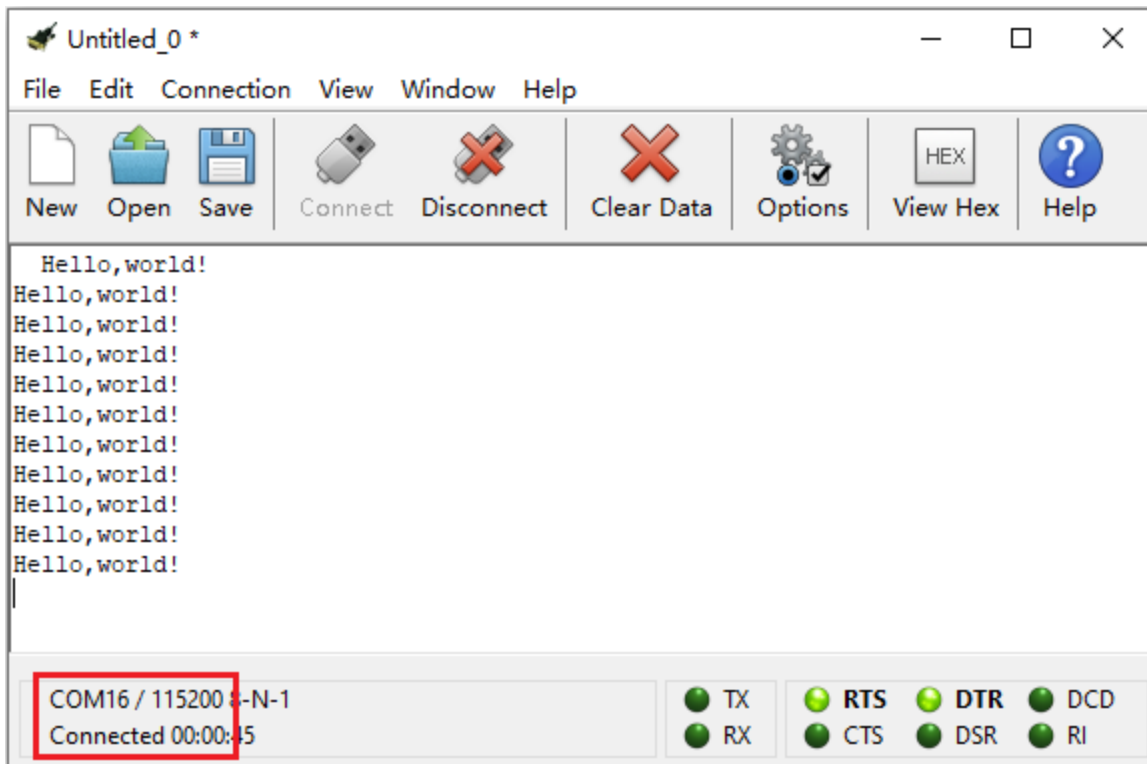

Project 14: LED Blinks

Overview

The LED blink is one of the more basic experiments. In the above Testuse of micro:bit, we have mentioned the 25 LED display of micro:bit. In this project, you will learn how to control an LED blink using a keystudio digital white LED module and micro:bit sensor shield. Before testing, you should first turn off the 5*5 LED function of micro:bit.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit sensor V2 shield*1
- USB Cable*1
- Keystudio Digital White LED Module*1
- Dupont jumper wire*3
- 6-Slot AA Premium Battery Holder*1
- 1.5V AA Battery*6

Component Introduction

Keystudio Micro bit Sensor V2 Shield:


This shield is very easy for micro:bit wiring. It breaks out the PI0 ports in the form of 3Pin (GND, VCC, PI0), easy to connect other sensor modules. Also with communication interfaces, like serial port, I2C and SPI pin headers.

You can power the shield via USB connection or external DC power jack (DC7-9V). If power the sensor module, you can control it via two cap V1 and


V2 on the shield, with DC3.3V and 5V.

Power the sensor shield with DC 7-9V, and this shield can power the micro:bit and other sensor modules, pretty convenient.

Special note: when connect external sensor module to the shield for working, the operating current of AMS1117-3.3V and NCP1117ST50T3G chip is too large, so it is easy to get hot. Pay special attention to avoid touching the two chips and causing burns.

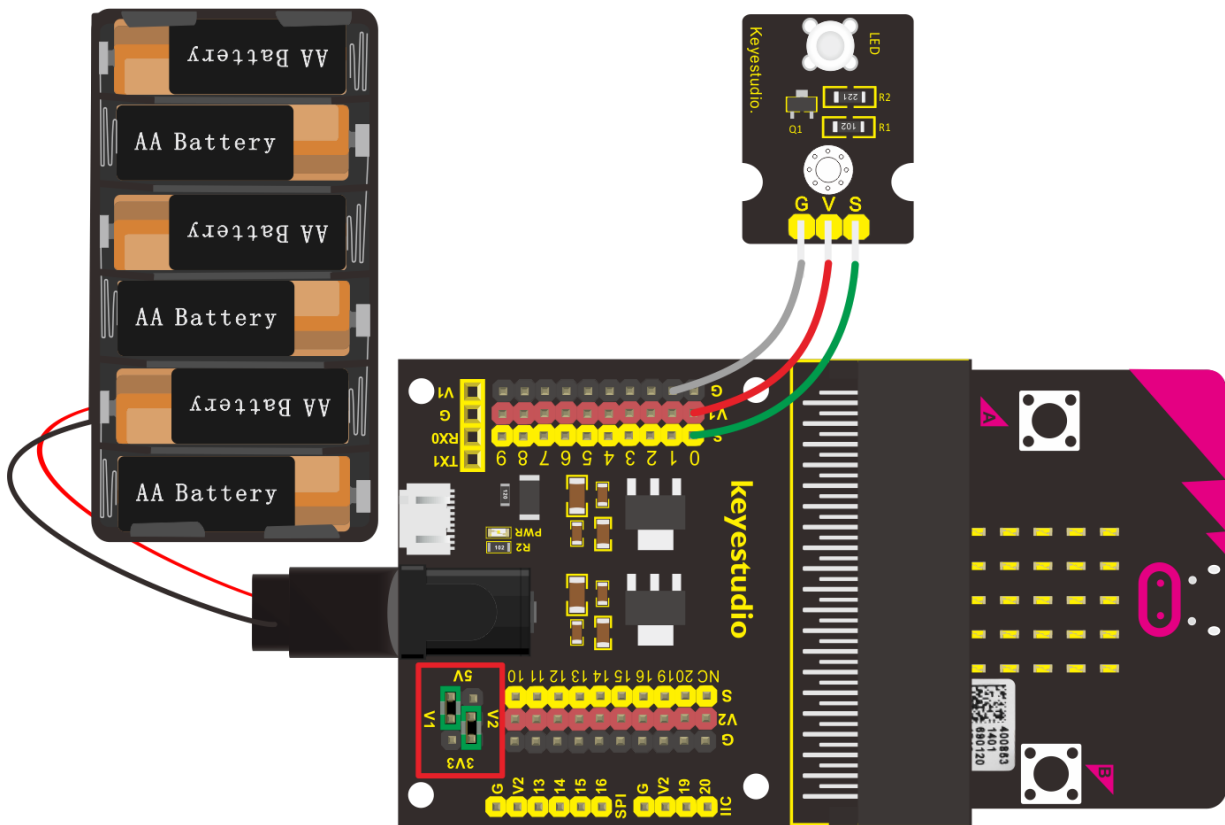

Test Code

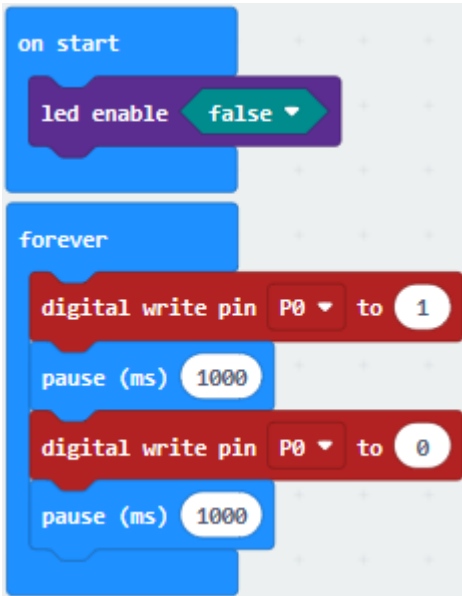

The image shows a Scratch code editor with the following blocks:

- on start** block containing a **led enable** block set to **false**.
- forever** loop containing:
 - digital write pin** block: P0 to 1
 - pause (ms)** block: 1000
 - digital write pin** block: P0 to 0
 - pause (ms)** block: 1000

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “ forever” runs cyclically.

Set P0 to high level (1) to light up LED.

Delay in 1000ms.

Set P0 to low level (0) to turn off LED.

Delay in 1000ms.

Test Results

Done wiring and powered up, send the code to micro:bit, you will see an LED blink on the module, with an interval about one second.

Project 15: Breathing Effect

Overview

The light breath experiment is a little bit similar to the previous project. This time we connect the keystudio LED module to the sensor shield. Connect the Signal pin of LED module to P0 of micro:bit. From the Pinout diagram of

micro:bit, you can get the P0 can be used as Analog IN.

This lesson you will learn how to control the brightness of LED on the module, gradually becoming brighter and dimming, just like the LED is breathing.

Component Required:


- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Digital Red LED Module*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Keystudio Digital Red LED Module:

This keystudio digital red LED module has 3 Pins; - pin is connected to ground, + pin is connected to VCC (3.3-5V) , S pin is for signal control; you can set the High or Low level to control the LED on and off.

Connection Diagram

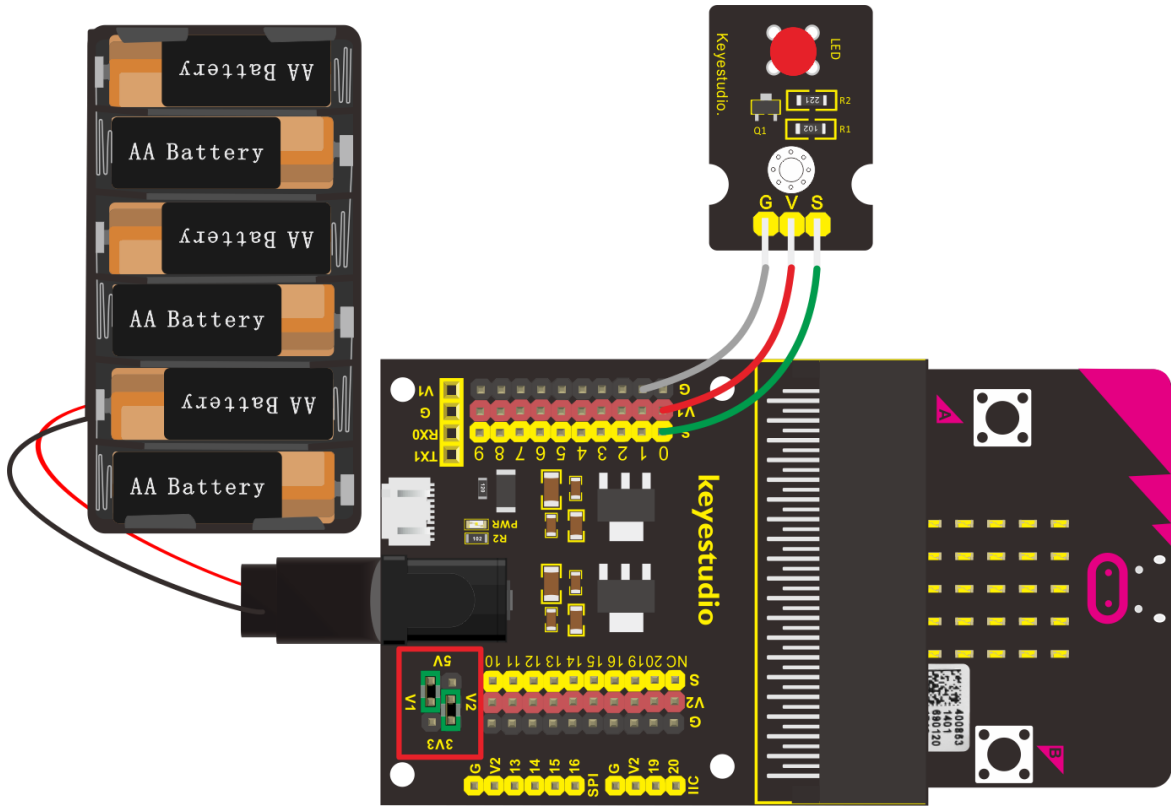

Test Code

```

on start
  led enable false

forever
  while val < 1024
  do
    set val to val + 1
    analog write pin P0 to val
    pause (ms) 5

  while val > 0
  do
    set val to val - 1
    analog write pin P0 to val
    pause (ms) 5

```

"on start" : command block only runs once to start program.

Turn off LED matrix

The program under the block " forever" runs cyclically.

When $val < 1024$, the program under do block runs.

Set val to val value +1

Set the analog value of P0 to val

Delay in 5ms

When $val > 0$, the program under do block runs

Set val to val value -1

Set the analog value of P0 to val

Delay in 5ms

Test Results

Done wiring and powered up, send the code to micro:bit, you should finally see an LED on the module gradually become brighter, then gradually dim, circularly just like the LED is breathing.

Project 16: LED Blinks and Breathes

Overview

In this project, we combine the project 2 and project 3. You will learn how to control the LED on the module blink for twice, then breath for twice, circularly. This time we use keystudio 3W LED module, which has high brightness and can be used as illumination.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- Keystudio 3W LED Module*1
- Dupont jumper wires
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6




Component Introduction

Keystudio 3W LED Module:

This LED module is of high brightness because the lamp beads it carries is 3W. You can apply this module to Arduino or other projects, ideal for Robot or search and rescue application. For example, intelligent robots can use this module for illumination purpose.

Please note that the LED light can't be exposed directly to human eyes for safety concerns.

Connection Diagram

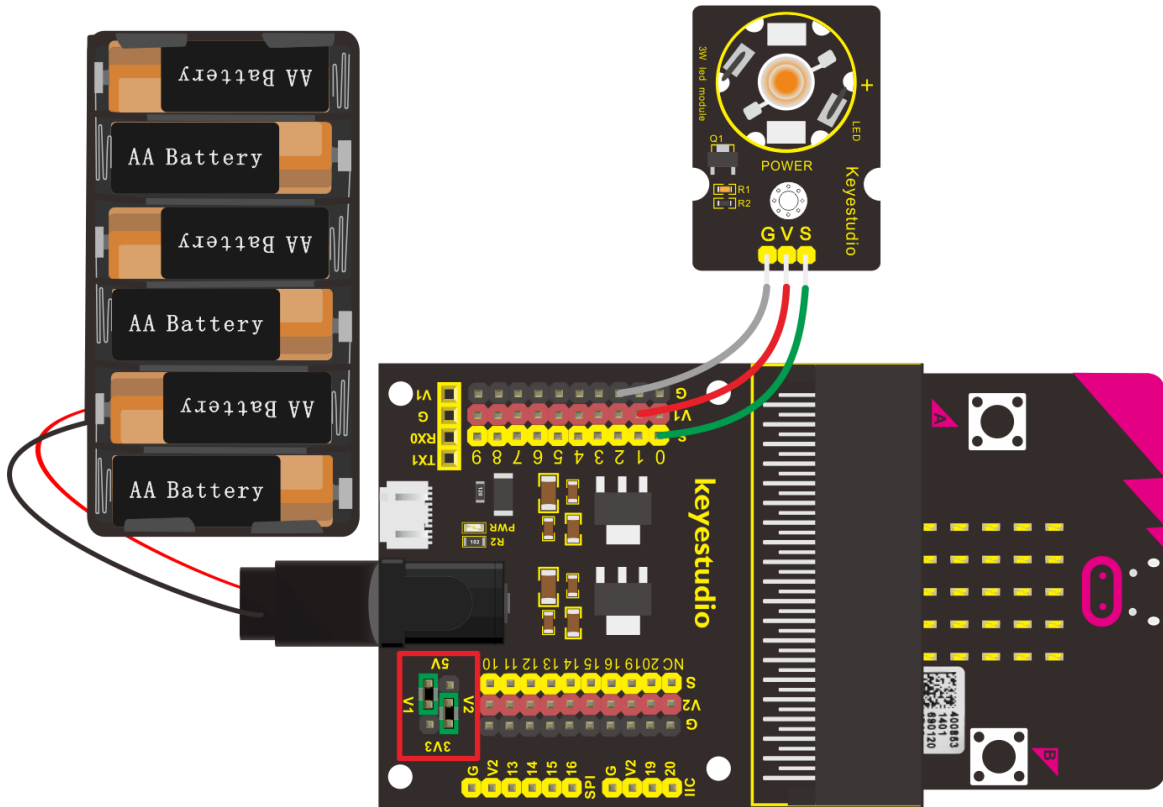

Test Code

```

on start
  led enable false

forever
  repeat 2 times
    do
      digital write pin P0 to 1
      pause (ms) 1000
      digital write pin P0 to 0
      pause (ms) 1000
  repeat 2 times
    do
      while val < 1024
        do
          set val to val + 1
          analog write pin P0 to val
          pause (ms) 5
        while val > 0
          do
            set val to val - 1
            analog write pin P0 to val
            pause (ms) 5
  
```

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “ forever” runs cyclically

The program under do block repeats twice

Set P9 to high level(1) to turn on red LED

Delay in 1000ms

Set P9 to set low level (0) to turn off red LED

Delay in 1000ms.

The program under do block repeats twice

When val<1024, the program under do block runs

Set variable val to val+1

Set the analog value of P0 to val

Delay in 5ms

When val>0, the program under do block runs

Set variable val to val-1

Set the analog value of P0 to val

Delay in 5ms

Test Results

Done wiring and powered up, send the code to micro:bit, you should see the LED on the module firstly blink twice, then breath twice, circularly.

Project 17: Make A Sound

Overview

In this project, you will learn how to generate a sound with keyestudio digital active buzzer module. Here you can refer to LED blink, in this lesson control the buzzer on and off circularly.

Component Introduction

Keyestudio Digital Buzzer Module:


It is the simplest sound making module. You can use High/Low level to drive it. Changing the frequency it buzzes can produce different sounds.

Buzzers can be categorized as active and passive ones. The difference between the two is that an active buzzer has a built-in oscillating source, so it will generate a sound when electrified. The buzzer on this module is an active buzzer. This module is widely used in our daily appliances like PC, refrigerator, telephones, timers and other electronic products for voice devices. etc.


Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Digital Buzzer Module*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

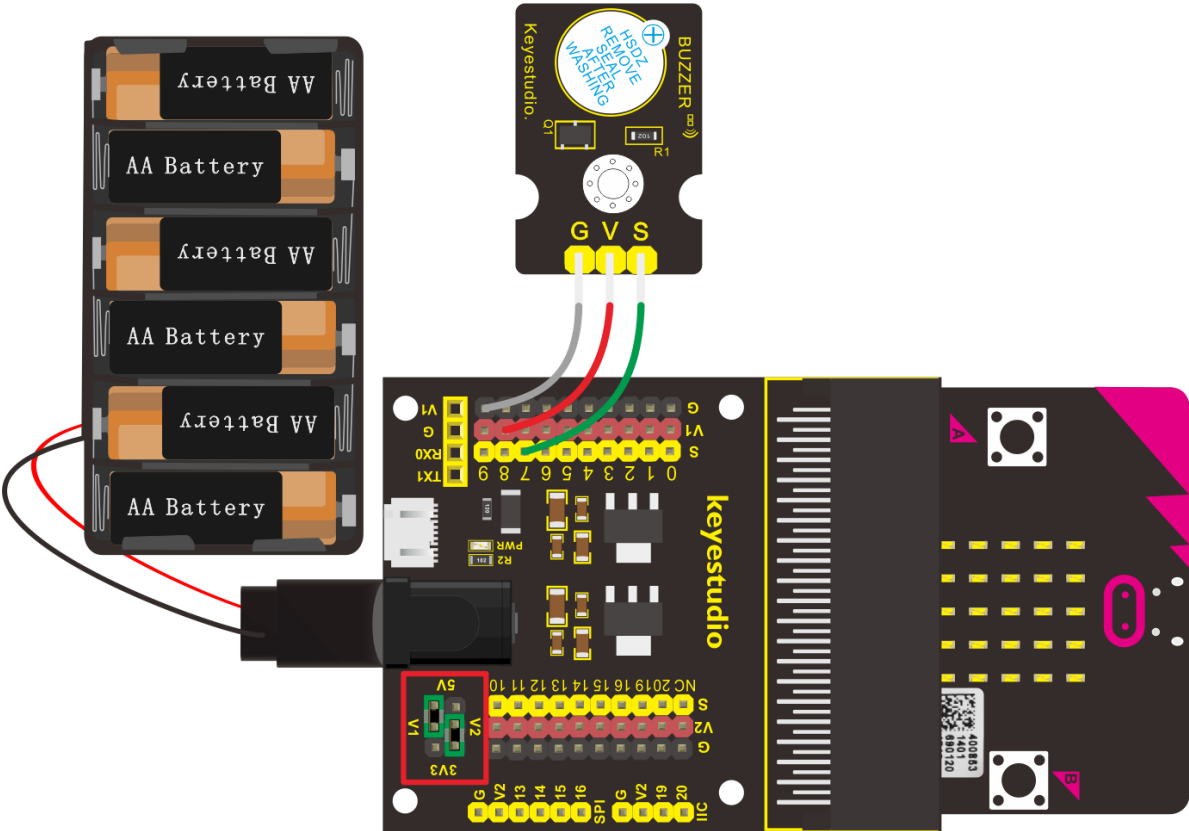

Test Code

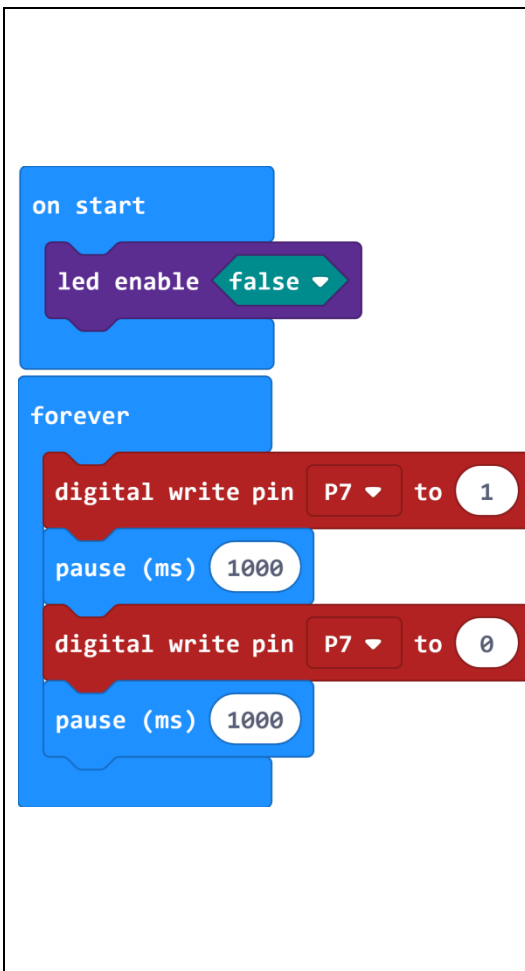	<p>"on start" : command block only runs once to start program.</p> <p>Turn off LED matrix</p> <p>The program under the block " forever" runs cyclically.</p> <p>Set P7 to high level(1) to make active buzzer emit sound</p> <p>Delay in 1000ms</p> <p>Set P7 to high low level(0) to stop active buzzer to make a sound</p> <p>Delay in 1000ms.</p>
--	--

Test Results

Done wiring and powered up, send the code to micro:bit, you should hear the buzzer module sound and then stop, circularly. It seems like the sound is interrupted.

Project 18: Play Music

Overview

In this project, you will learn how to play music with keystudio passive buzzer module. We are going to complete two experiments.

One is to directly control the High and Low level input of micro:bit P0 end, set two square waves to control the buzzer sound. The other is to use the software's own function, input the square waves of different frequencies and


different lengths on the P0 end. Finally make the buzzer module play the song "Ode to Joy".

(The input PIO port can only be P0, can not be other interfaces).

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Passive Buzzer Module*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Passive Buzzer Module:

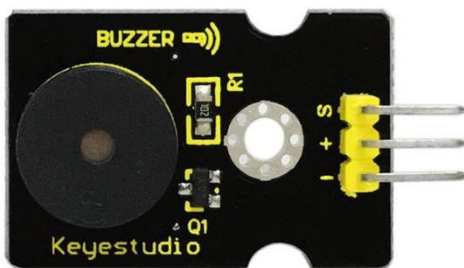


Buzzers can be categorized as active and passive

ones. The difference between the two is that an active buzzer has a built-in oscillating source, so it will generate a sound when electrified. The buzzer used on this module is a passive buzzer. A passive buzzer does not have such a source, so DC signal cannot drive it beep. Instead, you need to use square waves whose frequency is between 2K and 5K to drive it. Different frequencies produce different sounds. You can use micro:bit to code the

melody of a song, quite fun and simple.

Connection Diagram

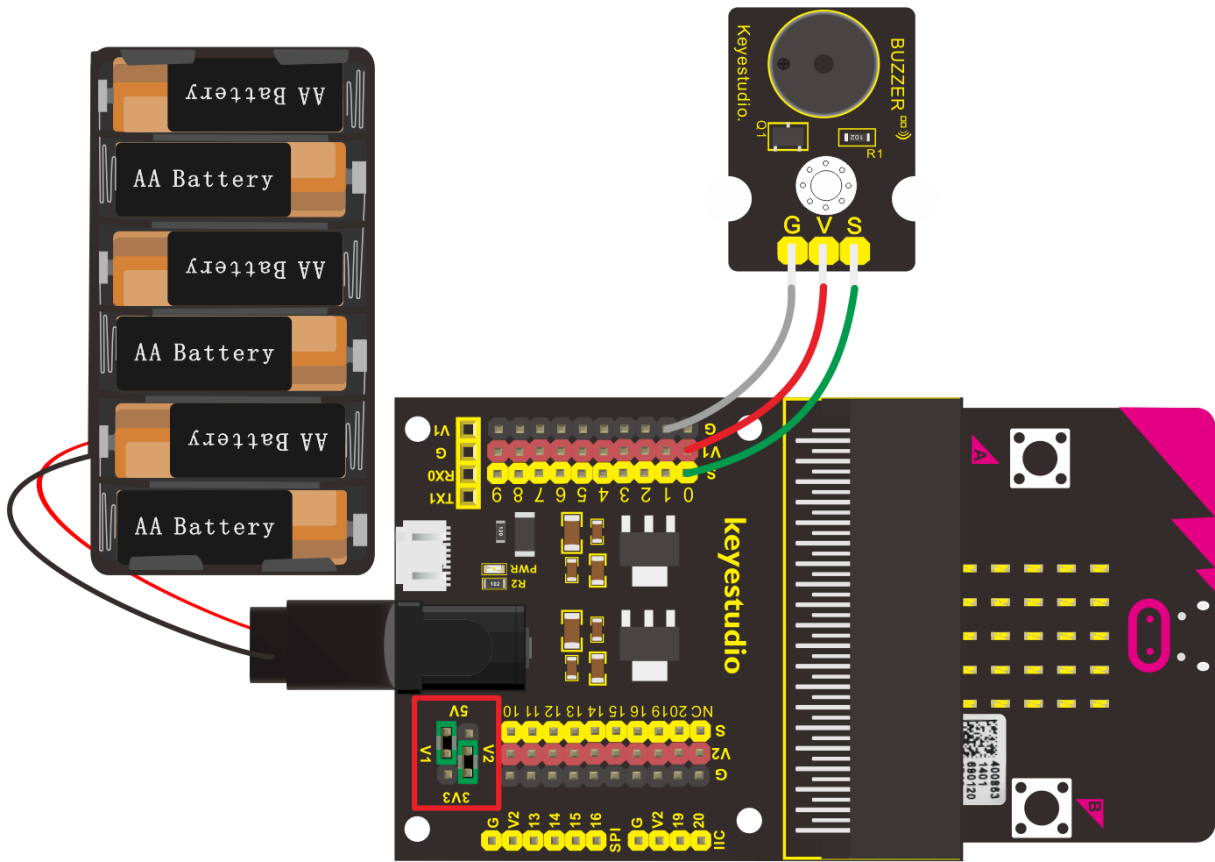

Test Code

Program 1:

```

on start
  led enable false

forever
  while i < 80
  do
    digital write pin P0 to 0
    pause (ms) 1
    digital write pin P0 to 1
    pause (ms) 1
    set i to i + 1
  set i to 0
  pause (ms) 100
  while i < 100
  do
    digital write pin P0 to 1
    pause (ms) 2
    digital write pin P0 to 0
    pause (ms) 2
    set i to i + 1

```

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “ forever” runs cyclically.

When $i < 80$, run the program under do block

Set P0 to low level (0) to stop passive buzzer from emitting sound.

Delay in 1ms.

Set P0 to high level(1) to make passive buzzer emit sound.

Delay in 1ms

Set variable i to value of $i + 1$

Set variable i to 0

Delay in 100ms

When $i < 100$, run the program under do block

When $i < 100$, run the program under do block

Set P0 to high level(1) to make passive buzzer emit sound.

Delay in 1ms

Delay in 2ms

Set P0 to low level (0) to stop passive buzzer from emitting sound.

Delay in 2ms

Set variable i to value of $i + 1$

Program 2:

```
on start
  led enable false
  forever
    play tone High E for 2 beat
    play tone High F for 1 beat
    play tone High G for 2 beat
    play tone High F for 1 beat
    play tone High E for 1 beat
    play tone High D for 1 beat
    play tone High C for 2 beats
    play tone High D for 1 beat
    play tone High E for 2 beats
    play tone High D for 1/2 beat
    play tone High C for 2 beat
    play tone High D for 1 beat
    play tone High E for 2 beat
    play tone High E for 1/2 beat
    play tone High D for 1/2 beat
    play tone High D for 2 beat
    play tone High E for 2 beat
    play tone High F for 1 beat
    play tone High G for 2 beat
    play tone High F for 1 beat
    play tone High E for 1 beat
    play tone High D for 1 beat
    play tone High C for 2 beats
    play tone High D for 1 beat
    play tone High E for 1 beat
    play tone High D for 1 beat
    play tone High E for 2 beat
    play tone High F for 1 beat
    play tone High E for 1 beat
    play tone High D for 1 beat
    play tone High C for 2 beat
    play tone High D for 1 beat
    play tone High E for 1 beat
    play tone High D for 1 beat
```

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “forever” runs cyclically.

Play tone high E for 2 beats

Play tone high F for 1 beat

Play tone high G for 2 beats

Play tone high F for 1 beat

Play tone high E for 1 beat

Play tone high D for 1 beat

Play tone high C for 2 beats

Play tone high D for 1 beat

Play tone high E for 2 beats

Play tone high D for 1/2 beat

Play tone high C for 2 beat

Play tone high D for 1 beat

Play tone high E for 2 beats

Play tone high F for 1 beat

Play tone high G for 2 beat

Play tone high F for 1 beat

Play tone high E for 1 beat

Play tone high D for 1 beat

Play tone high C for 2 beats

Play tone high D for 1 beat

Play tone high E for 1 beat

Play tone high D for 1 beat

play tone High D for 1/2 beat

play tone High C for 1/2 beat

play tone High C for 2 beat

play tone High D for 2 beat

play tone High E for 1 beat

play tone High C for 1 beat

play tone High D for 1 beat

play tone High E for 1/2 beat

play tone High F for 1/2 beat

play tone High E for 1 beat

play tone High C for 1 beat

play tone High D for 1 beat

play tone High E for 1/2 beat

play tone High F for 1/2 beat

play tone High E for 1 beat

play tone High D for 1 beat

play tone High C for 1 beat

play tone High D for 1 beat

play tone Middle G for 1 beat

play tone Low E for 1 beat

play tone High E for 2 beat

play tone High F for 1 beat

play tone High G for 2 beat

play tone High F for 1 beat

play tone High E for 1 beat

play tone High F for 1/2 beat

Play tone high D for 1/2 beat

Play tone high C for 1/2 beat

Play tone high C for 2 beats

Play tone high D for 2 beats

Play tone high E for 1 beat

Play tone high C for 1 beat

Play tone high D for 1 beat

Play tone high E for 1/2 beat

Play tone high F for 1/2 beat

Play tone high E for 1 beat

Play tone high C for 1 beat

Play tone high D for 1 beat

Play tone high E for 1/2 beat

Play tone high F for 1/2 beat

Play tone high E for 1 beat

Play tone high D for 1 beat

Play tone high C for 1 beat

Play tone high D for 1 beat

Play tone high G for 1 beat

Play tone high E for 1 beat

Play tone high E for 2 beats

Play tone high F for 1 beat


Play tone high G for 2 beats


Play tone high F for 1 beat

Play tone high E for 1 beat

Play tone high F for 1/2 beat

	<p>Play tone high D for 1/2 beat</p> <p>Play tone high G for 2 beat</p> <p>Play tone high D for 1 beat</p> <p>Play tone high E for 1 beat</p> <p>Play tone high D for 1 beat</p> <p>Play tone high D for 1/2 beat</p> <p>Play tone high D for 1/2 beat</p> <p>Play tone high C for 1/2 beat</p> <p>Play tone high C for 2 beats</p>
--	---

Note: on the MakeCode Block webpage, click the icon , you can see the frequency of each tone as follows.

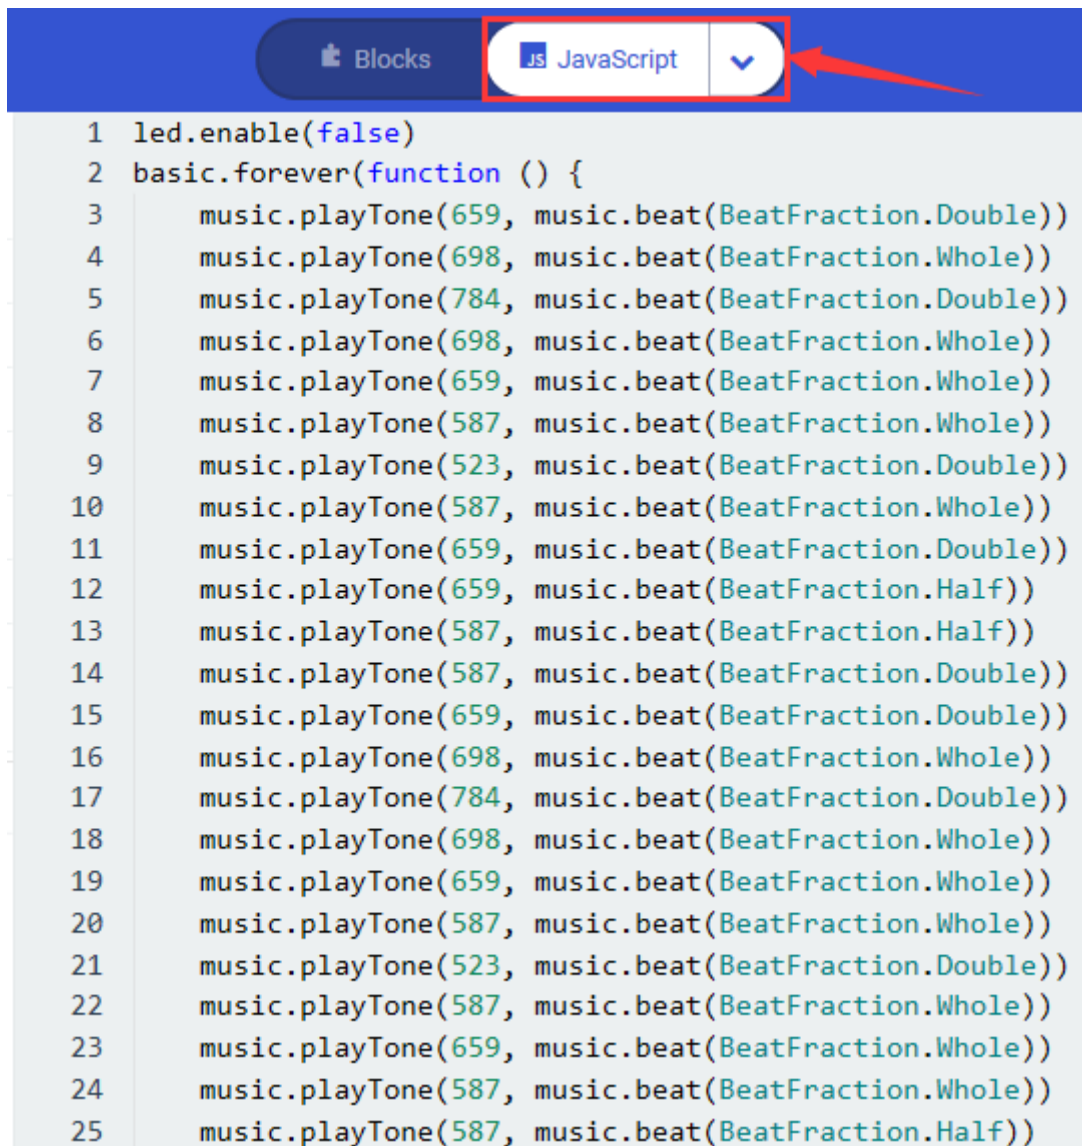

```
1 led.enable(false)
2 basic.forever(function () {
3     music.playTone(659, music.beat(BeatFraction.Double))
4     music.playTone(698, music.beat(BeatFraction.Whole))
5     music.playTone(784, music.beat(BeatFraction.Double))
6     music.playTone(698, music.beat(BeatFraction.Whole))
7     music.playTone(659, music.beat(BeatFraction.Whole))
8     music.playTone(587, music.beat(BeatFraction.Whole))
9     music.playTone(523, music.beat(BeatFraction.Double))
10    music.playTone(587, music.beat(BeatFraction.Whole))
11    music.playTone(659, music.beat(BeatFraction.Double))
12    music.playTone(659, music.beat(BeatFraction.Half))
13    music.playTone(587, music.beat(BeatFraction.Half))
14    music.playTone(587, music.beat(BeatFraction.Double))
15    music.playTone(659, music.beat(BeatFraction.Double))
16    music.playTone(698, music.beat(BeatFraction.Whole))
17    music.playTone(784, music.beat(BeatFraction.Double))
18    music.playTone(698, music.beat(BeatFraction.Whole))
19    music.playTone(659, music.beat(BeatFraction.Whole))
20    music.playTone(587, music.beat(BeatFraction.Whole))
21    music.playTone(523, music.beat(BeatFraction.Double))
22    music.playTone(587, music.beat(BeatFraction.Whole))
23    music.playTone(659, music.beat(BeatFraction.Whole))
24    music.playTone(587, music.beat(BeatFraction.Whole))
25    music.playTone(587, music.beat(BeatFraction.Half))
```

Test Results

Done wiring and powered up, send the code 1 to micro:bit, you should hear two sounds produced from passive buzzer circularly. If send the code 2 to micro:bit, the buzzer will play the song Ode To Joy! Really amazing. Right? You can try to change the tone to play other music.

Project 19: Change Colors

Overview

In this project, we will use a keystudio RGB LED module. This Common Anode RGB LED module is a fun and easy way to add some color to your projects. In our program, we will connect the RGB module to micro:bit, then control the P0, P1, P2 Analog Input of micro:bit main board. You will learn how to control the RGB LED on the module firstly show three colors (Red, Green and Blue), then quickly change the color state.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio RGB LED Module*1
- Dupont jumper wire*4
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6


RGB LED Module:

RGB comes from the initials of three additive primary colors, red, green, and blue. RGB LEDs are like 3 regular LEDs in one, how to use and connect them is not much different. They come mostly in 2 versions: Common Anode or Common Cathode. Common Anode uses 5V on the common pin, while

Common Cathode connects to ground.

This keystudio RGB LED module is Common Anode. It can be seen as separate LEDs. LEDs have three different color-emitting diodes that can be combined to create all sorts of colors. This RGB LED module is very easy for wiring, with a fixed hole that you can mount it on your any devices.

Connection Diagram

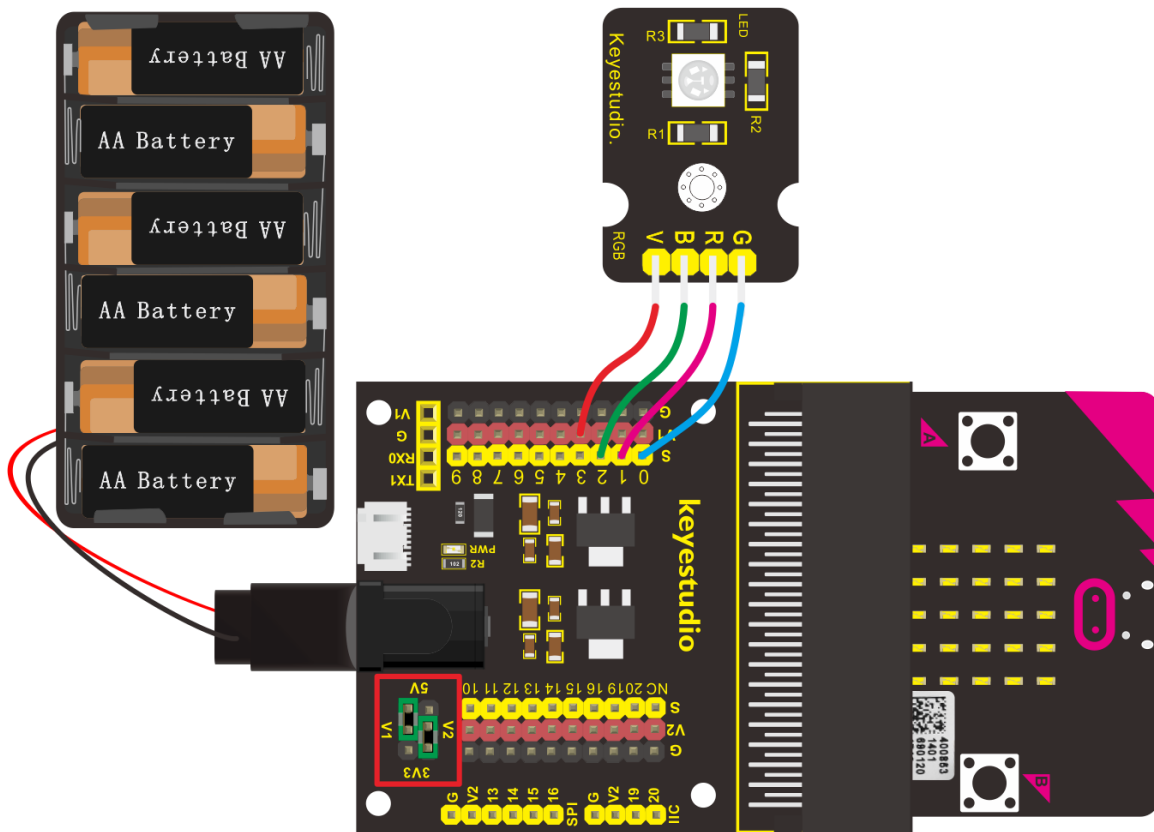

Test Code

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “ forever” runs cyclically.

Set analog value of P2 to 0

Set analog value of P0 to 1023

Delay in 1000ms.

Set analog value of P0 to 0

Set analog value of P1 to 1023

Delay in 1000ms

Set analog value of P1 to 0

Set analog value of P2 to 1023

Delay in 1000ms

When the value of variable val is in the range of 0-513, execute the program under do block

Set the analog value of P0 to val

Set analog value of P1 to 1023-val

Set analog value of P2 to 512-val

Delay in 1ms

When value of val is in the range of 0-513, execute the program under do block

Set the analog value of P0 to 512-val

Set the analog value of P1 to 1023-val

Set the analog value of P2 to val.

Delay in 1ms.

Test Results

Done wiring and powered up, send the code to micro:bit, you should see the RGB module firstly show three colors, separately red, green and blue light. Then change the color quickly and circularly.

Project 20: Button Control

Overview

When design the circuit, button switch is a commonly used component. The micro:bit main board has two built-in buttons, however, sometimes still need to use external button when design the circuit. So in this project, you will learn how to use our push button module to control 5*5 LED of micro:bit display different images.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Digital Push Button*1
- keystudio Digital White LED Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Digital Push Button Module:

The buttons are common input devices. You will have used a


```

on start
  led enable false
  set PushCounter to 0
  set State to 0
  set Laststate to 0

forever
  serial write value "x" = PushCounter
  set State to digital read pin P0
  if State ≠ Laststate then
    if State = 1 then
      set PushCounter to PushCounter + 1
    pause (ms) 100
    set Laststate to State
    if remainder of PushCounter ÷ 2 = 0 then
      digital write pin P4 to 0
    else
      digital write pin P4 to 1

```

“on start” : command block only runs once to start program.

Turn off LED matrix

Set variable PushCounter to 0

Set variable State to 0

Set variable Laststate to 0

The program under the block “forever” runs cyclically.

Display “x” =the value of PushCounter in serial monitor

Set the digital signals read by button module to State

When State≠Laststate, execute the program under then block.

When State=1, execute the program under then block.

Set PushCounter+1=PushCounter

Delay in 100ms

Set the value of State to Laststate

If the remainder of PushCounter divided by 2 is 0, the program under then block will be executed

Set P4 to low level(0) to turn off LED

If the remainder of PushCounter divided by 2 is not equal to 0, execute the program under else block.

Set P4 to high level(1) to light up LED

Test Results

Wire up according to connection diagram, connect to external power, upload code to micro:bit, press button and LED is on; when button is released, LED is off.

Project 21: Tilt Control

Overview

When design the circuit, sometimes you will need to test whether an object is tilted left or right, so in this case you can use our tilt sensor. In this project, you will learn how to use our digital tilt sensor to control 5*5 LED of micro:bit display different images.

Component Required:

Micro:bit main board*1

Keystudio Micro bit Sensor V2 Shield*1

USB Cable*1

Keystudio Digital Tilt Sensor*1

Dupont jumper wire*3

Premium Battery Holder 6-cell AA*1

1.5V AA Battery*6

Component Introduction


Tilt Sensor:

This keystudio digital tilt sensor mainly integrates a tilt sensor. The tilt sensor is a component that can detect the tilting of an object.


The principle is very simple. It mainly uses the ball in the switch changing with different angle of inclination to achieve the purpose of triggering circuits.

When the ball in tilt switch runs from one end to the other end because of external force shaking, the tilt switch will conduct, or it will break

Connection Diagram

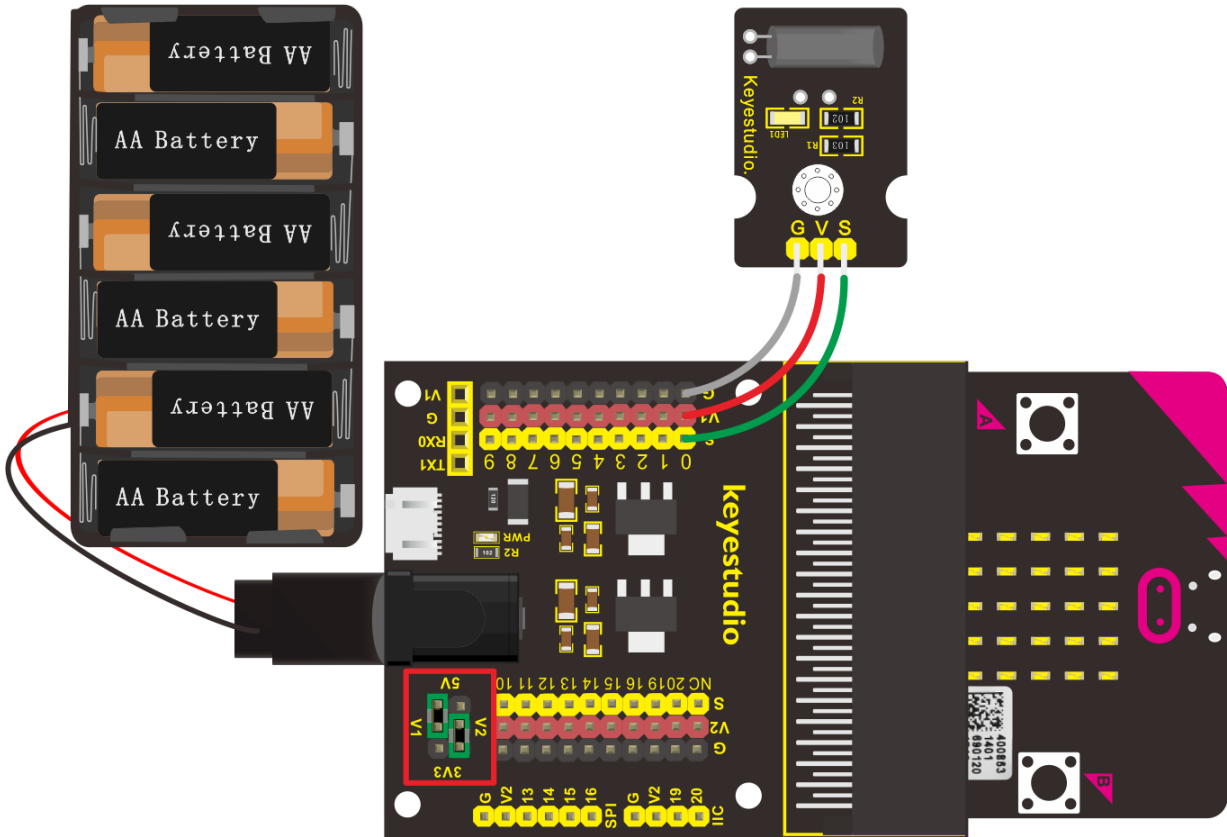

Test Code

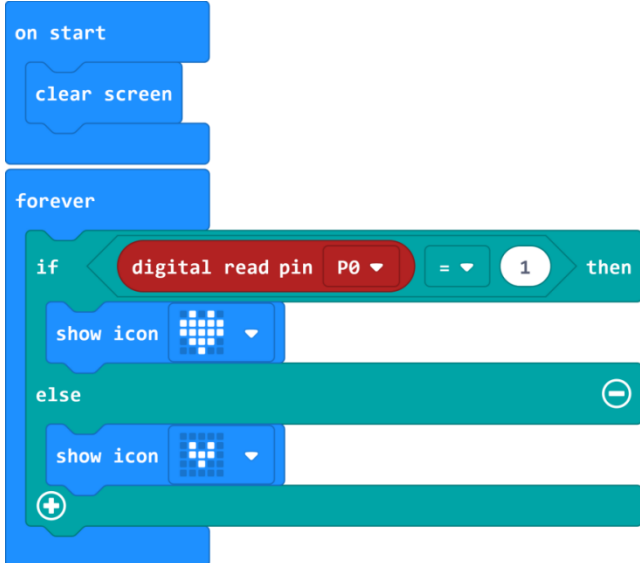

“on start” : command block only runs once to start program.



Micro:bit clears the screen

The program under the block “ forever” runs cyclically.

If the digital signal read by tilt sensor=1, execute the program under then block.

Micro:bit displays “♥”

Test Results

Done wiring and powered up, send the code to micro:bit. When tilt the sensor to the left, you should see the LED matrix of micro:bit show the icon like a heart . If tilted to the right, it will show the icon like this .

Project 22: Light Interrupter

Overview

In daily life, we often need to implement the function of counting and speed measurement. How to achieve these functions? You can easily match photo-interrupter module with microcontroller via code debugging.

A Photointerrupter is a transmission-type photosensor, which typically consists of a light emitting elements and light receiving elements aligned facing each other in a single package, that works by detecting light blockage when a target object comes between both elements. We could finish counting and speed detection by observing the change of the signals end on module.

In this lesson, we connect a keystudio photo-interrupter module to micro:bit sensor shield, then control 5*5 LED of micro:bit show different images and red LED.

Component Required:

Micro:bit main board*1

Keystudio Micro bit Sensor V2 Shield*1

USB Cable*1

Keystudio Photo Interrupter Module*1


Keystudio Digital Red LED Module*1

Dupont jumper wire*6

Premium Battery Holder 6-cell AA*1

1.5V AA Battery*6

Connection Diagram

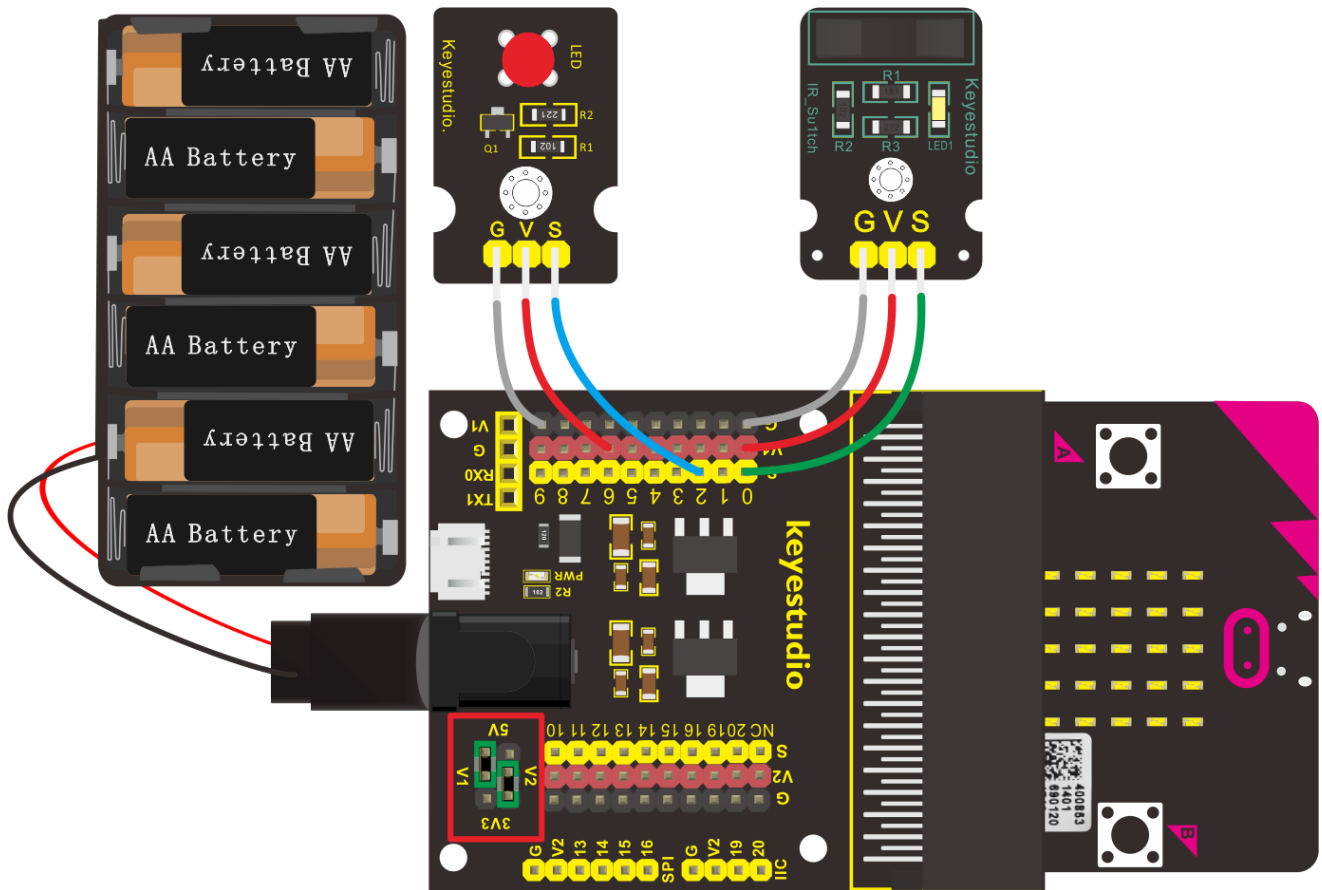

Test Code

```
on start
  clear screen

forever
  show number digital read pin P0
  if digital read pin P0 = 1 then
    digital write pin P2 to 1
  else
    digital write pin P2 to 0
```

"on start" : command block only runs once to start program.

Micro:bit clears the screen

The program under the block "forever" runs cyclically.

micro:bit show the digital signal read by light interrupter

If the digital signal read by P0=1, execute the program under then block.

Set P2 to high level(1) to light up LED.

When the digital signal read by P0 =0, execute the program under else block.

Set P2 to low level(0) to turn off red LED

Test Results

Done wiring and powered up, send the code to micro:bit. When cover the notch of sensor with a piece of paper, you will view number 1 is shown on micro:bit and LED will light up; on the contrary, micro:bit will display 0 and LED will be off.

Project 23: Capacitive Touch

Overview

In the above project 8, we have done a button control experiment. This time, we are going to replace the button switch with a capacitive touch sensor. In this project, you will learn how to use Keystudio touch sensor to control active buzzer.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Capacitive Touch Sensor*1
- keystudio Digital Buzzer Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Capacitive Touch Sensor:


The module is based on a touch detection IC. This module allows you to remove the troubles of conventional push-type buttons. It has low power consumption and wide working voltage.

Powered on, the module requires the stable time about 0.5sec, at the moment

all functions are banned to conduct self-calibration, do not touch the key, the calibration cycle is about 4.0sec.

It can be applied to the waterproof electrical, button replacement, etc.

Connection Diagram

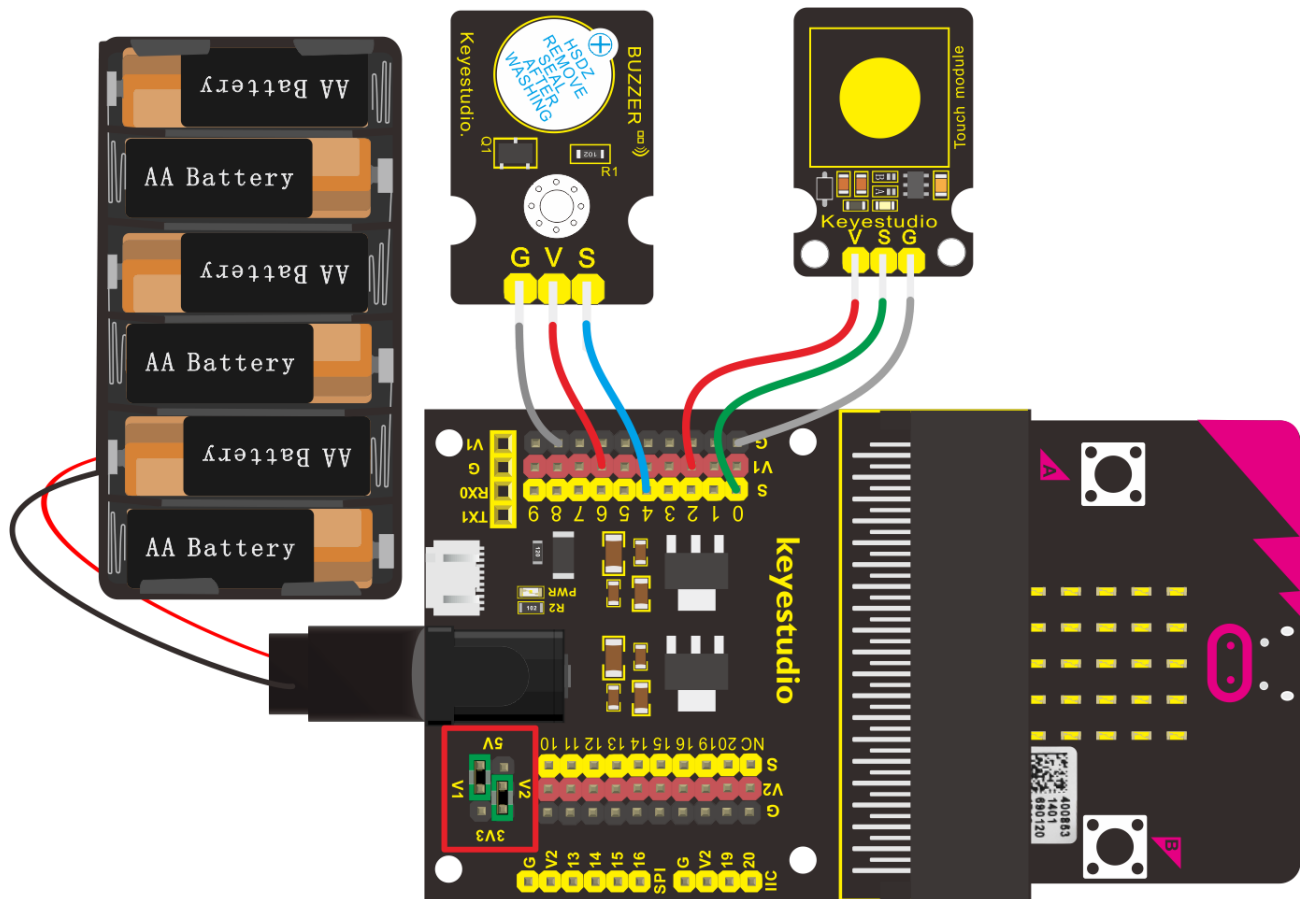

Test Code

```
on start
  led enable false
  digital write pin P4 to 0

forever
  if digital read pin P0 = 1 then
    digital write pin P4 to 1
  else
    digital write pin P4 to 0
```

“on start” : command block only runs once to start program.

Turn off LED matrix

Set P4 to low level(0) to turn off active buzzer

The program under the block “ forever” runs cyclically.

If the digital signal read by P0 is 1, the program under then block will be executed

When the digital signal read by P0=1,

Set P4 to high level(1) to make active buzzer emit sound

When the digital signal read by P0 is 0, the program under else block will be executed.

Test Results

Done wiring and powered up, transfer code to micro:bit. When touch the sensing area of sensor, the active buzzer will emit sound, conversely , it won' t make a sound.

Project 24: Traffic Light

Overview

When walking at the crossroad, you can see the traffic light command the orderly movement of pedestrians and vehicles. So how is the traffic light controlled to operate? In this project, we will connect a traffic light module to our sensor shield, controlling traffic light blink with micro:bit. You will learn how to simulate the running of traffic light.

Component Introduction

Traffic Light Module:


When learning the microcontroller, you may usually use three separate LEDs (red, green and yellow) to simulate the traffic light blinking. In this way you may need more wire connection. We specially design this traffic light module, which is very convenient for wiring. It has integrated three LEDs (red, green and yellow) together on the module. Also breaks out four pin interfaces. There are two positioning holes for easy installation.

Component Required:

- Micro:bit main board *1
- Keystudio Micro bit Sensor V2 Shield *1
- USB Cable *1
- Keystudio Traffic Light Module *1
- Dupont jumper wire *4
- Premium Battery Holder 6-cell AA*1

➤ 1.5V AA Battery*6

Connection Diagram

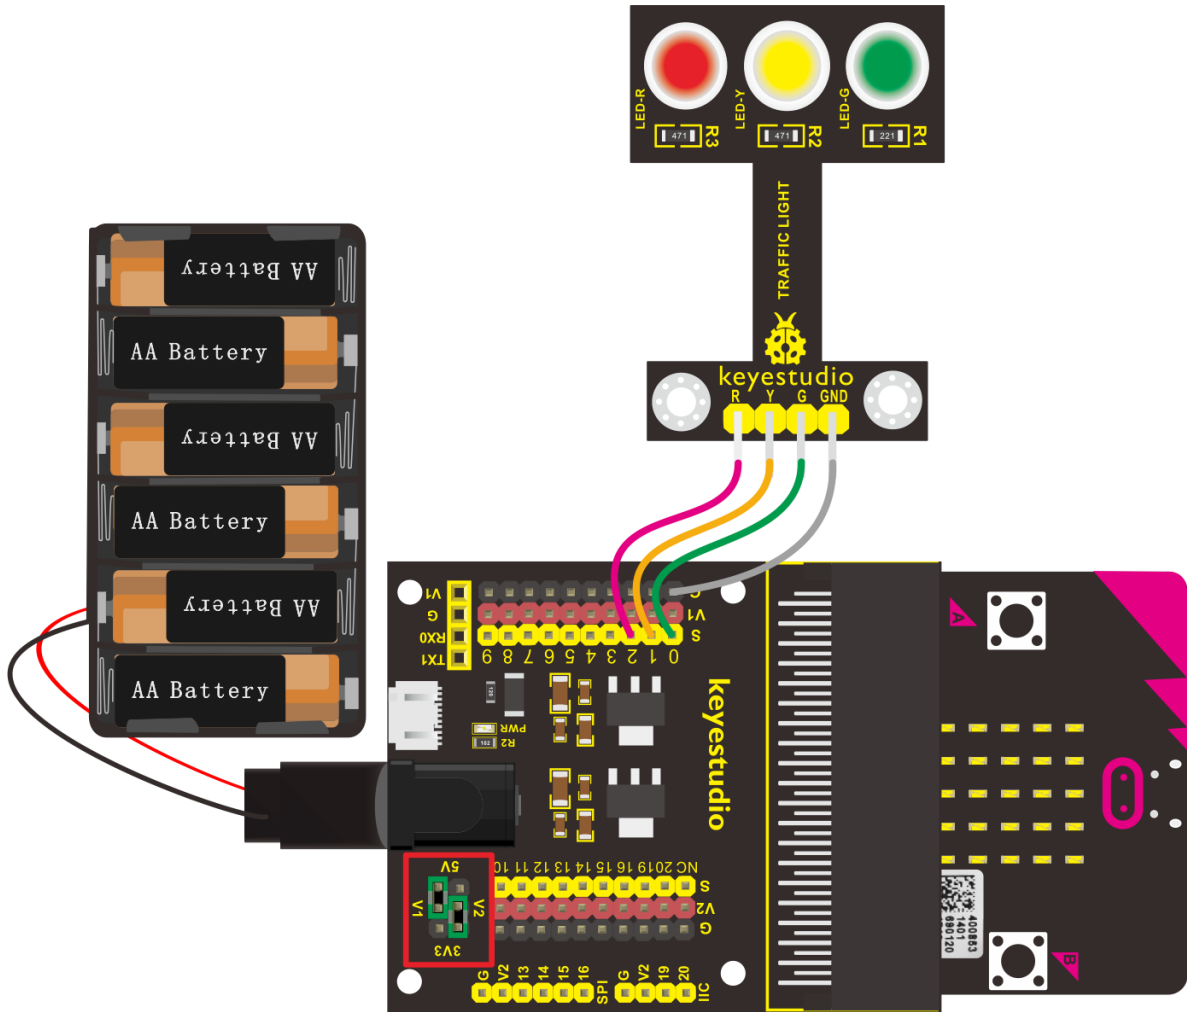

Test Code

	<p>"on start" : command block only runs once to start program.</p> <p>Turn off LED matrix</p> <p>The program under the block " forever " runs cyclically</p> <p>Set P0 to high level(1) to light up green LED.</p> <p>Delay in 5000ms</p> <p>Set P0 to low level(0) to turn off green LED.</p> <p>Repeat program for three times under do block</p> <p>Delay in 500ms</p> <p>Set P1 to high level(1) to turn off yellow LED</p> <p>Delay in 500ms</p> <p>Set P1 to low level(0) to turn off yellow LED.</p> <p>Delay in 500ms</p> <p>Set P2 to high level(1) to turn on red LED</p> <p>Delay in 5000ms</p>
--	--

Test Results

Done wiring and powered up, send the code to micro:bit, eventually you should see the green LED lights 5 seconds then off, and yellow LED starts to blink 3 times with an interval of 0.5 second, then off, followed by red LED lights up for 5 seconds then off. Up to this moment, green LED lights again, forming a

loop cycle.

Project 25: Magnetic Detection

Overview

In this project, you will learn how to use our hall magnetic sensor to control 5*5 LED of micro:bit display different images.

Component Introduction

Hall Magnetic Sensor:

The main component used in this sensor is A3144E. This hall magnetic sensor can be used to detect a magnetic field, outputting Digital signal. It can sense the magnetic materials within a detection range up to 3cm.

Note that it can only detect whether exists a magnetic field nearby but can not detect the strength of magnetic field.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Hall Magnetic Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1


```
on start
  clear screen

forever
  if digital read pin P0 = 1 then
    show icon [heart icon]
  else
    show icon [3x3 grid icon]
```

“on start” : command block only runs once to start program.


Micro:bit clears the screen

The program under the block “forever” runs cyclically.

If the digital signal read by P0 is 1(sensor detects no magnetic field around), the program under then block will be executed



micro:bit shows “♥”

When the digital signal read by P0 is 0(sensor detects magnetic field somewhere), the program under else block will be executed

micro:bit shows “”

Test Results

Done wiring and powered up, send the code to micro:bit. You can place a magnetic bead near the sensor.

When hall sensor doesn't detect the magnetic field around, you should see the LED matrix of micro:bit show the icon like a heart . Or else, it will show the icon like this .

Project 26: Follow Black Line

Overview

When doing DIY experiments, you perhaps see such a smart car that can follow a black line and not beyond the black area. How can achieve this? Yeah, make use of line tracking sensors. In this project, we will use a tracking sensor combined with micro:bit to detect an object or a black line. You can get the result shown on the LED display of micro:bit.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Line Tracking Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Line Tracking Sensor:

The tracking sensor is actually an infrared sensor, which can detect a black line.

The component used in the sensor is TCRT5000 infrared tube.


Its working principle is to use the different reflectivity of infrared light to the color, then convert the strength of the reflected signal into a current signal.

When sensor detects a black line, the infrared rays are not emitted or the intensity of emitted ray back are not sufficiently strong, so that the sensor's signal terminal outputs a High level. Otherwise, output a Low level.


In this way, we can judge the detected color by High or Low level of the sensor's signal terminal.

Note: on the module, you can rotate the potentiometer to make the LED between on and off state. The sensitivity is the best.

Connection Diagram

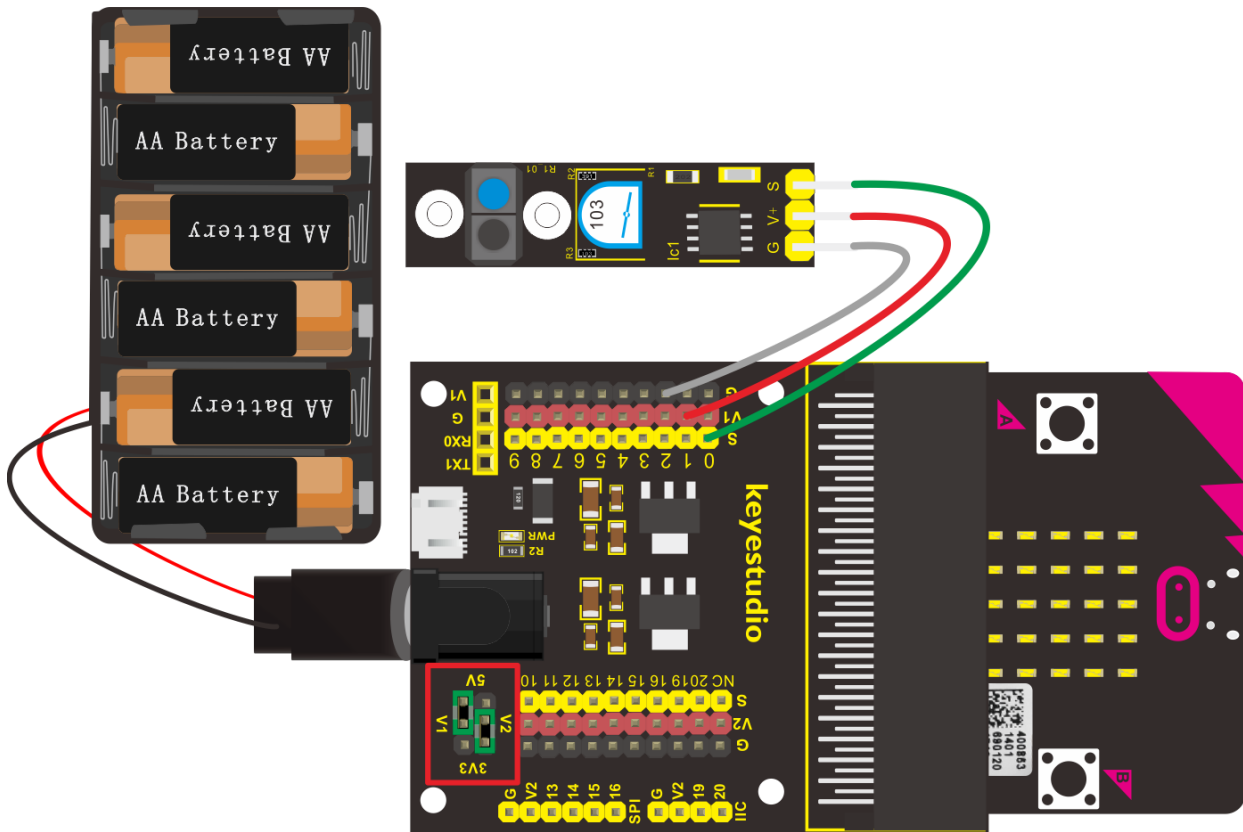

Test Code

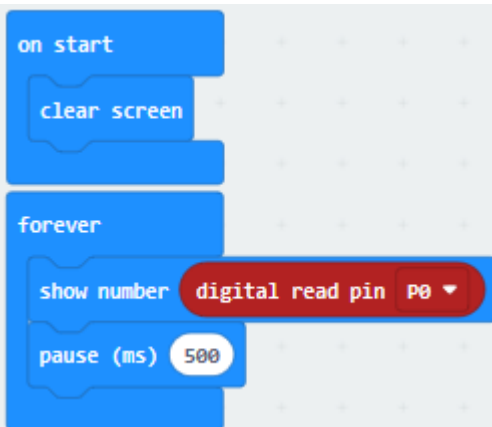

"on start" : command block only runs once to start program.

Micro:bit clears the screen

The program under the block "forever" runs cyclically.

micro:bit shows the digital signals read by line tracking sensor

Delay in 500ms

Test Results

Done wiring and powered up, send the code to micro:bit. When sensor detects no object or detects a black line, the infrared rays are not emitted or the intensity of emitted ray back are not sufficiently strong, so that the sensor's signal terminal will output a High level, LED on the micro:bit will show the number 1. Or else show the number 0.

Note: rotate the potentiometer on the sensor, the sensitivity is highest when make the LED on and off state. The detection height is 0—3 cm.

Project 27: Obstacle Avoidance

Overview

When doing DIY experiments, you perhaps see such a smart car that can automatically avoid an obstacle ahead. How can achieve this? Yeah, make use of infrared obstacle avoidance sensors. In this project, we will use a obstacle sensor combined with micro:bit to detect an object ahead and automatically avoid it. You can get the result shown on the LED display of micro:bit.

Component Introduction

Obstacle Avoidance Sensor:

The infrared obstacle detector sensor is actually a distance-adjustable

obstacle avoidance sensor.

It has a pair of infrared transmitting and receiving tubes. The transmitter emits an infrared ray of a certain frequency. When the detection direction encounters an obstacle (reflecting surface), the infrared rays are reflected back, and receiving tube will receive it. At this time, the signal terminal will output Low level.

If no obstacle detected, the infrared ray emitted is weakened by the distance it travels and eventually disappears, so receiving tube cannot receive it and signal end of sensor will output High level.


In this case, it can judge whether there is an obstacle ahead or not.

You can rotate the potentiometer knob on the sensor to adjust the detection distance. The effective distance is 2-40cm and working voltage is 3.3V-5V.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Obstacle Detector Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

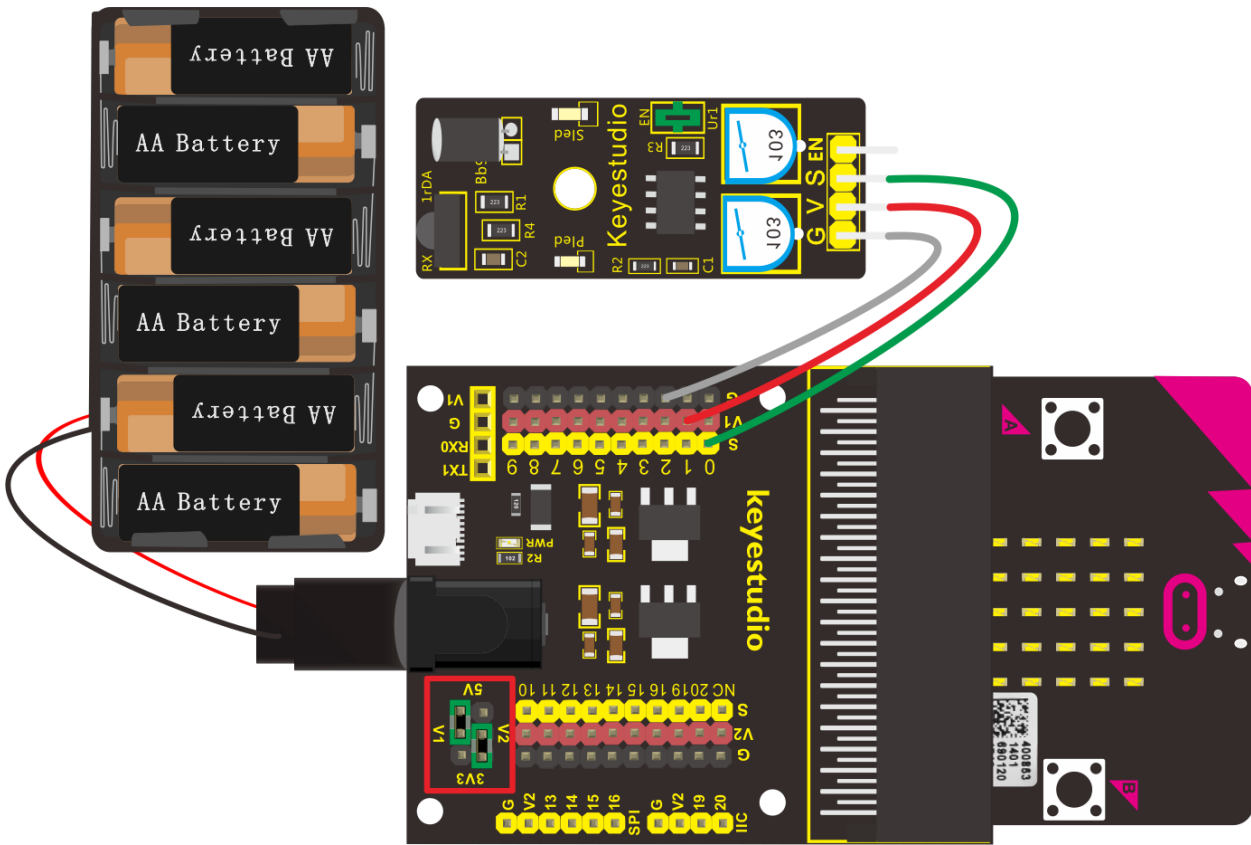

Test Code

```

on start
  clear screen
  forever
    show number digital read pin P0
    pause (ms) 500
  
```

“on start” : command block only runs once to start program.

Micro:bit clears the screen

The program under the block “forever” runs cyclically.

micro:bit displays the digital signal read by obstacle avoidance sensor

Delay in 500ms

Test Results

Done wiring and powered up, send the code to micro:bit. When sensor detects an object ahead, its signal terminal will output a Low level, and LED matrix on the micro:bit will show the number 0. Or else show the number 1.

Note: for obstacle sensor, you can rotate the two potentiometers on the sensor to adjust its sensitivity. Rotate the potentiometer near the infrared transmitter tube clockwise to the end, and then adjust the potentiometer near the infrared receiver. Sled light is turned off and keeps the critical point to be lit. The sensing distance is the longest.

The effective distance of the sensor is within 2-40 cm.

Project 28: Someone Comes

Overview

You may see such a lens in a film or television. When someone wants to attack a target, but not close to the target, they were directly found and the alarm sounded. When some special forces go to the target, they will be covered with moist mud, so that they will not be discovered by the other party. Why ?

Originally, the human body will emit a certain wavelength of infrared rays of

about 10um. The relevant sensors are installed near the targets that are being attacked to sense the infrared rays emitted by the human body and then alarm. After the mud is applied, the sensors can not sense the infrared rays emitted by the human body.

In this project, you will learn how to use a PIR motion sensor and micro:bit to detect whether there is someone move nearby. Finally show the different images on 25 LED matrix of micro:bit.

Component Introduction


PIR Motion Sensor:

This sensor can detect infrared signals from a moving person or moving animal nearby, and output High level at signal end. If no detected, output Low level. Note that it can only detect the moving human body, do not detect the body in static. And the detection distance is 3m at most.


Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- Keystudio PIR Motion Sensor*1
- Keystudio Digital Buzzer Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

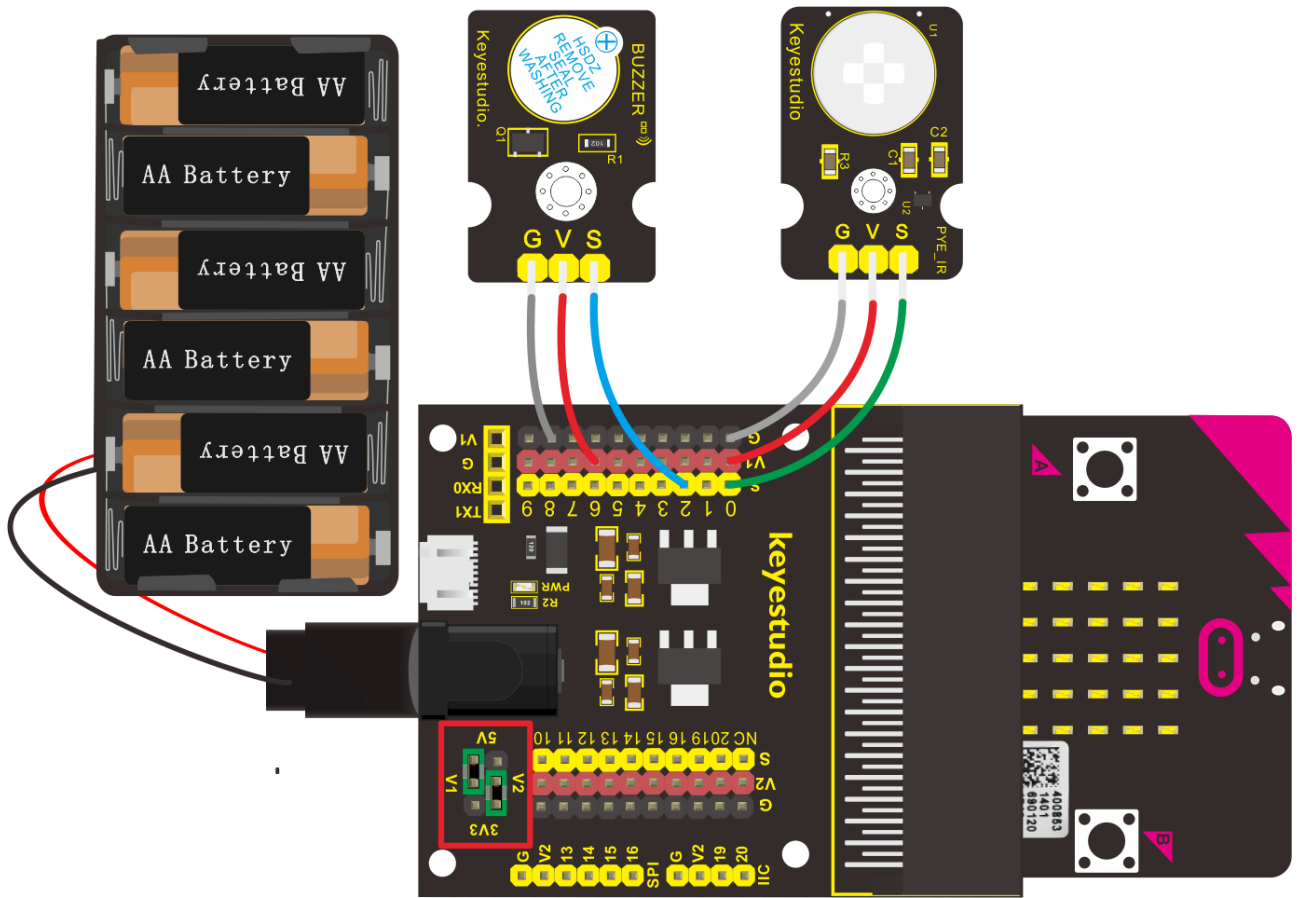

Test Code

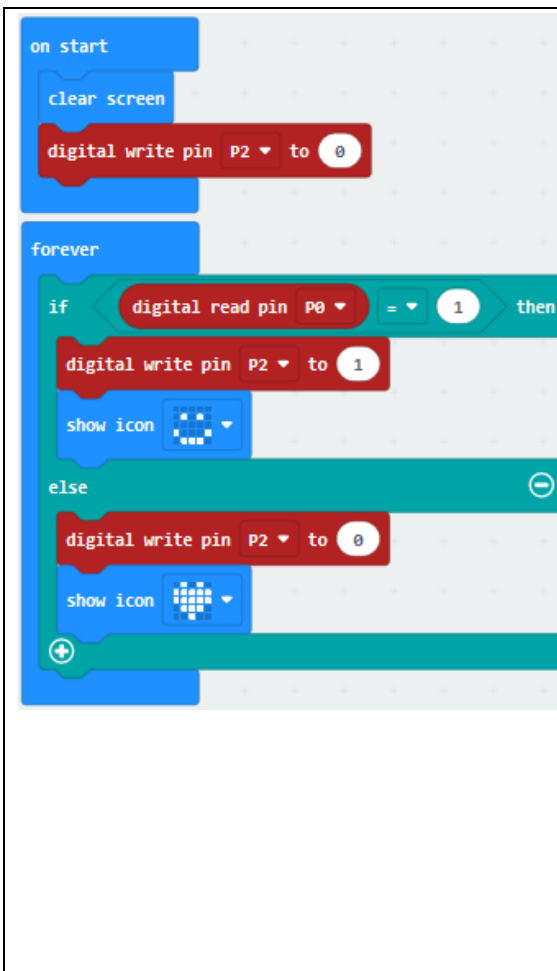

“on start” : command block only runs once to start program.


Micro:bit clears the screen

Set P2 to low level(0) to turn off active buzzer

The program under the block “forever” runs cyclically.


When the digital signal read by P0 is 1, that is to say, PIR motion sensor detects people moving, then execute the program under then block.

Set P2 to high level(1) to make active buzzer emit sound



micro:bit shows “”

When the digital signal read by P0 is 0, that is to say, nobody is detected, then the program under else block will be executed.

Set P2 to low level(0) to turn off active buzzer

micro:bit shows “”

Test Results

Done wiring and powered up, send the code to micro:bit. When sensor detects the movement of someone nearby, active buzzer will make a sound and micro:bit will show “” ; otherwise, micro:bit will show “” and no sound emits.

Project 29: Fire Alarm

Overview

In daily life, it is often seen that a fire broke out without any precaution. It will cause great economic and human loss. So how can we avoid this situation? Right, install a flame sensor and a speaker in those places that easily break out

a fire. When the flame sensor detects a fire, the speaker will alarm people quickly to put out the fire.

So in this project, you will learn how to use a flame sensor and an active buzzer module to simulate the fire alarm system.

Component Introduction

Flame Sensor:



This flame sensor can be used to detect fire or other light sources with wavelength stands at 760nm ~ 1100nm. Its detection angle is about 60°. You can rotate the potentiometer on the sensor to control its sensitivity. Adjust the potentiometer to make the LED at the critical point between on and off state. The sensitivity is the best.


In the fire-fighting robot game, the flame sensor plays an important role in probing the fire source.

Component Required:


- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- Keyestudio Flame Sensor*1
- Keyestudio Digital Buzzer Module*1
- Dupont jumper wire* 6

- Premium 6-Slot AA Battery Holder *1
- 1.5V AA Battery*6

Connection Diagram

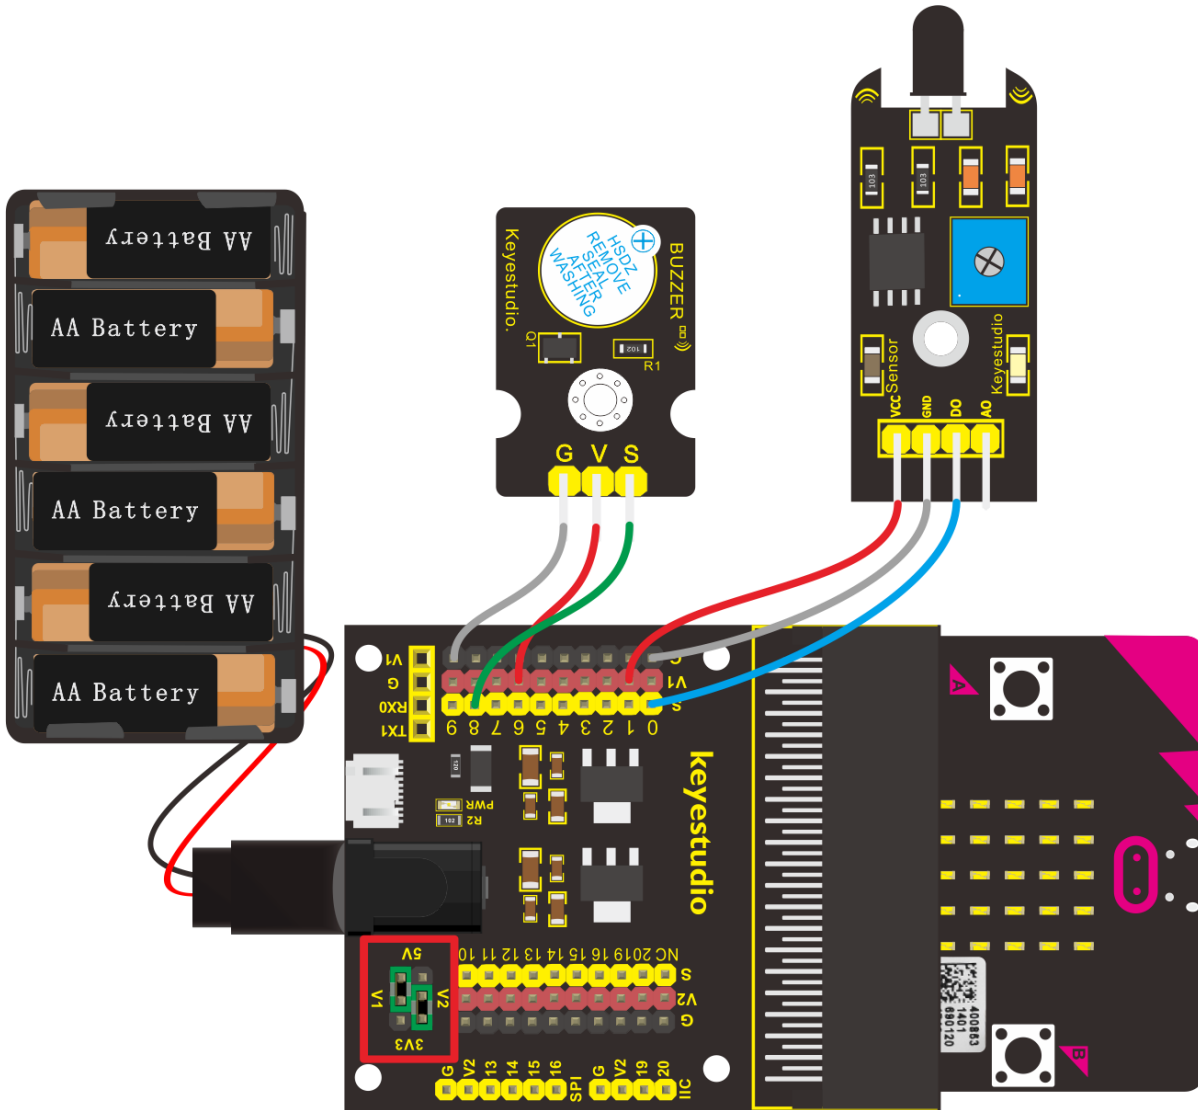

Test Code

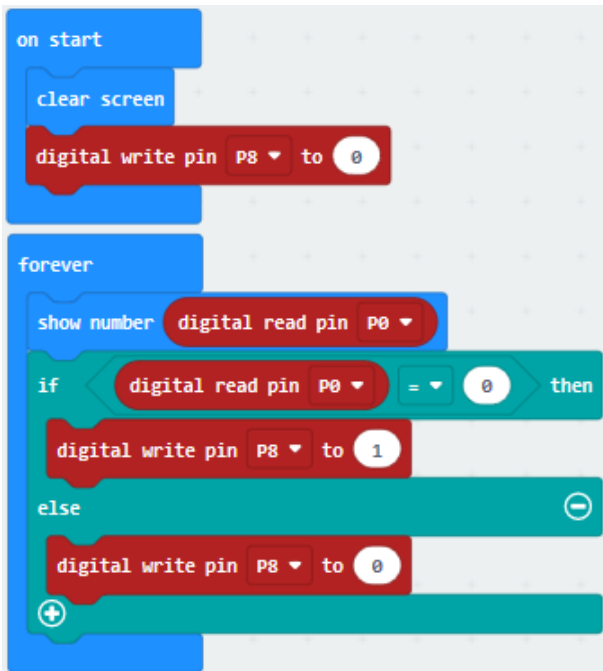

"on start" : command block only runs once to start program.

Micro:bit clears the screen

Set P8 to low level(0) to turn off active buzzer

The program under the block " forever" runs cyclically.

Micro:bit shows the digital signal read by flame sensor

If the digital signal read by P0 is 0, that means the flame is detected, and the program under then block will be executed.

When the digital signal read by

Set P8 to high level(1) to make active buzzer emit sound

When the digital signal read by P0 is 1(flame sensor doesn't detect the fire), the program under else block will be executed.

When the digital signal read by P0 is 1, the program under else will be executed.

When digital signal read by P0 is 0, that is to say that

Set P8 to low level(0) to turn off active buzzer

Test Results

Done wiring and powered up, send the code to micro:bit. When flame sensor detects the fire nearby, the buzzer module will sound immediately, and micro:bit will display "0" ; If no fire is detected, the buzzer doesn't beep, number 1 will be shown on micro:bit.

Project 30: To the Top

Overview

During the DIY, we may usually use a machine-3D printer. You can use it to print any elements with different structures. And limit switch is essential in the printing, which mainly provides the information whether XYZ axis of printer reach the boundary point.

Keyestudio crash sensor is a limit switch, available for 3D printer. It is in essence the same as button module. When printer reaches the top to crash the spring plate of module, module outputs Low level. If loosen the spring plate, module outputs High.

In this lesson, you will learn how to use a collision sensor and a digital buzzer module to simulate the 3D printer limit.

Component Introduction

Crash Sensor:


Crash sensor, also known as electronic switch, is a digital on-off input module. The features are as follows:

1. When collision happens upfront of where crash module is installed, module outputs low level signal; no collision, outputs high level signal.
2. With a mounting hole, convenient for fixation on any devices.
3. PCB size: 3.1cm * 2.1cm
4. With switch indicator light, if there is collision, LED on; if no collision, LED off.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Crash Sensor*1
- keystudio Digital Buzzer Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

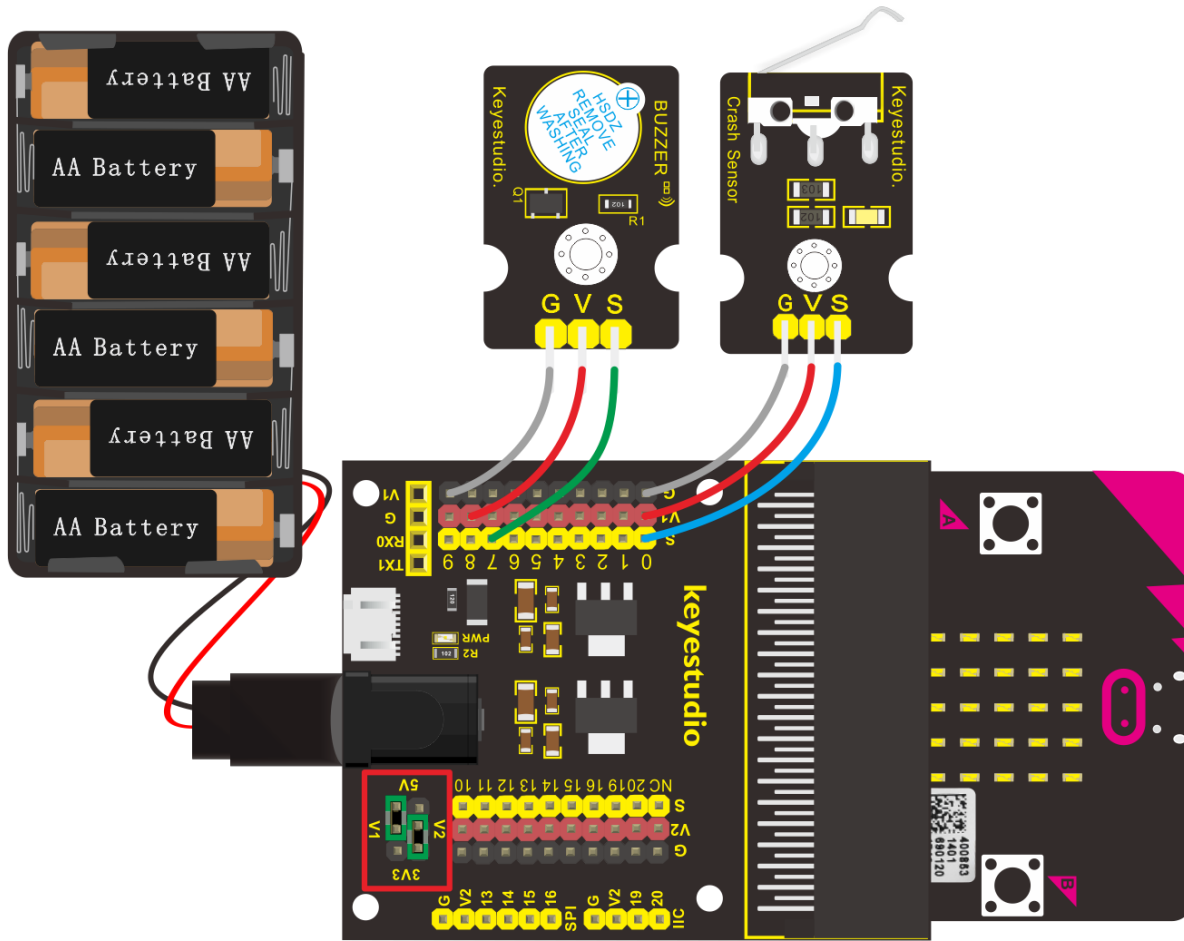

Test Code

```

on start
  led enable false

forever
  if digital read pin P0 = 0 then
    digital write pin P7 to 1
  else
    digital write pin P7 to 0
  
```

"on start" : command block only runs once to start program.

Turn off LED matrix

The program under the block "forever" runs cyclically.

If the digital signal read by P0 is 0, the program under then block will be executed

Set P7 to high level(1) so as to make active buzzer emit sound.

When the digital signal read by P0 is 1(no collision), the program under else block will be executed

The digital signal read by P0 is 1, the program under else block will be executed.

Set P7 to low level(0) to stop buzzer to make sound

Test Results

Done wiring and powered up, send the code to micro:bit. When the spring plate of crash sensor is pressed, the buzzer module will beep, otherwise buzzer will not sound.

Project 31: Magnetic Switch

Overview

In this project, you will learn how to use a keystudio reed switch module and micro:bit to detect the magnetic field. Finally show the result on the 25 LED matrix of micro:bit. Actually in the project 13, we have used a hall magnetic sensor to detect whether there is magnetic field nearby. So what is the differences between hall magnetic sensor and reed switch module? You can check it in component introduction below.

Component Introduction


Reed Switch Module:

The keystudio reed switch module is mainly composed of a reed switch. The reed switch is a mechanical magnetic switch, a passive device. Its working principle is that the magnetic field magnetizes its reed, so that it can be turned on and off to achieve the switch effect. However, since it is a contact type switch, its working life is limited, and it is easy to be damaged during transportation and installation.

The main component used in keystudio Hall Magnetic Sensor is the A3144E, which is an electronic magnetic device, active device. And the output form is a switch type. It uses magnetic fields and Hall effects for contactless control purposes. Since the Hall element itself is a chip, its working life is theoretically unlimited.

Reed switch has been widely applied in household appliances, cars, communication, industry, health care and security areas.

Test Code

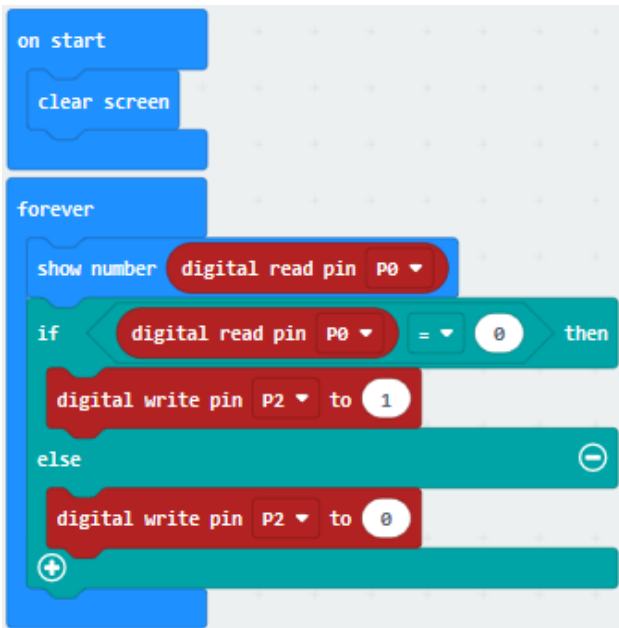

“on start” : command block only runs once to start program.

Micro:bit clears the screen

The program under the block “ forever” runs cyclically.

Micro:bit shows the digital signal by reed switch module

If the digital signal is 0, which means that magnetic field is detected, the program under then block will be executed

Set P2 to high level(1), red LED is on.

When the digital signal is 1, which implies no magnetic field around, the program under else block will be executed.

Set P2 to low level(0), red LED turns off

Test Results

Done wiring and powered up, send the code to micro:bit. When the reed sensor detects a magnetic field nearby, you will view the micro:bit show "0" and red LED turns on, otherwise, "1" is shown on micro:bit and LED is off.

Project 32: Relay Module

Overview

In daily life, we generally use 220V AC to drive the electrical equipment. Sometimes we will use the switch to control the electrical appliance. If directly connect the switch to the 220V AC circuit, once electric leakage happened, people are in danger. Considered with safety, we particularly design this keyestudio single relay with terminal block of NO (normally open) and NC (normally closed), which is active at High.

In this project, you will learn how to use our relay module and micro:bit to control an LED module on and off. (note that for easy wiring, the circuit does not add 220V voltage, still use 5V.)

Component Introduction

Single Relay Module:

This module uses a high-quality SONGLE 5V relay. The relay output is by a

light-emitting diode, can be controlled through digital IO. It can be used to control lighting, electrical and other devices of high current or voltage.

When supply high voltage to S end, the relay is driven, that is, normally open (NO) connected, normally closed (NC) disconnected.


When supply low voltage to S end, the relay is turned off, that is, NO is disconnected, and NC connected.

In this way, we connect the 220V AC circuit to NO or NC terminal block, more safe and convenient through 5V voltage control.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Single Relay Module*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

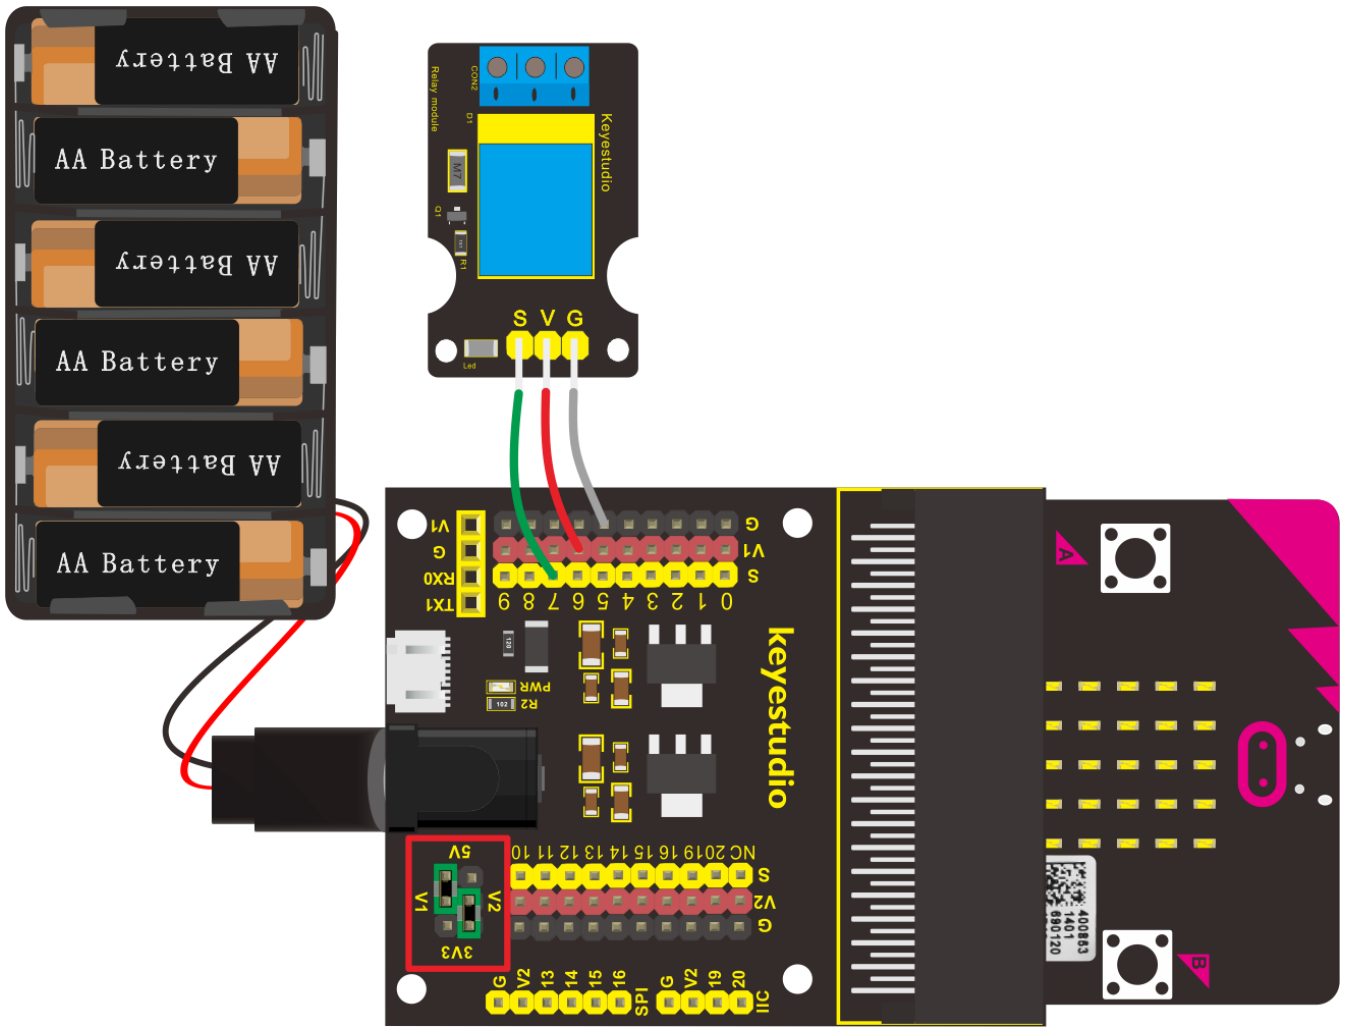

Test Code

```

on start
  led enable false
forever
  digital write pin P7 to 1
  pause (ms) 1000
  digital write pin P7 to 0
  pause (ms) 1000
  
```

“on start” : command block only runs once to start program.

Turn off LED matrix

The program under the block “forever” runs cyclically.

Set P7 to high level(1), the relay module is connected

Delay in 1000ms

Set P7 to low level(0) to disconnect relay module

Test Results

Done wiring and plug in power, transfer the code to micro:bit. relay module is connected, after 1s, relay is disconnected, with an interval of one second, repeatedly.

Project 33: Ultrasonic Ranging

Overview

Ultrasonic sensor is great for all kind of projects that need distance measurements, avoiding obstacles as examples.

In this project, you will learn how to use a ultrasonic module and micro:bit to detect the distance between the module and an obstacle ahead.


Component Introduction

Ultrasonic Module:

This Ultrasonic detector module HC-SR04 can provide 2cm-450cm non-contact measurement distance, and its ranging accuracy is up to 3mm. It includes an ultrasonic transmitter, receiver and control circuit.

Ultrasonic module will emit the ultrasonic waves after trigger signal. When the ultrasonic waves encounter an object and are reflected back, the module outputs an echo signal, so it can determine the distance of object from the time difference between trigger signal and echo signal.

The basic principle of work as follows:

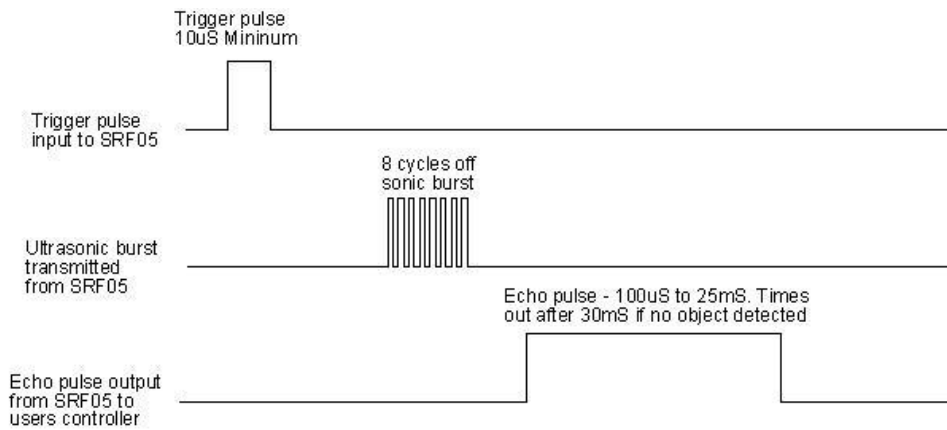


- 1) First pull down the TRIG, and then trigger it with at least 10us high level signal;
- 2) After triggering, the module will automatically transmit eight 40KHZ square waves, and automatically detect whether there is a pulse signal back.
- 3) If there is a signal back, through the ECHO to output a high level, the duration time of high level is actually the time from sending ultrasonic to returning back.

Test distance = high level duration * velocity of sound (340m/s) * 0.5

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Ultrasonic Module*1
- Dupont jumper wire*4
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

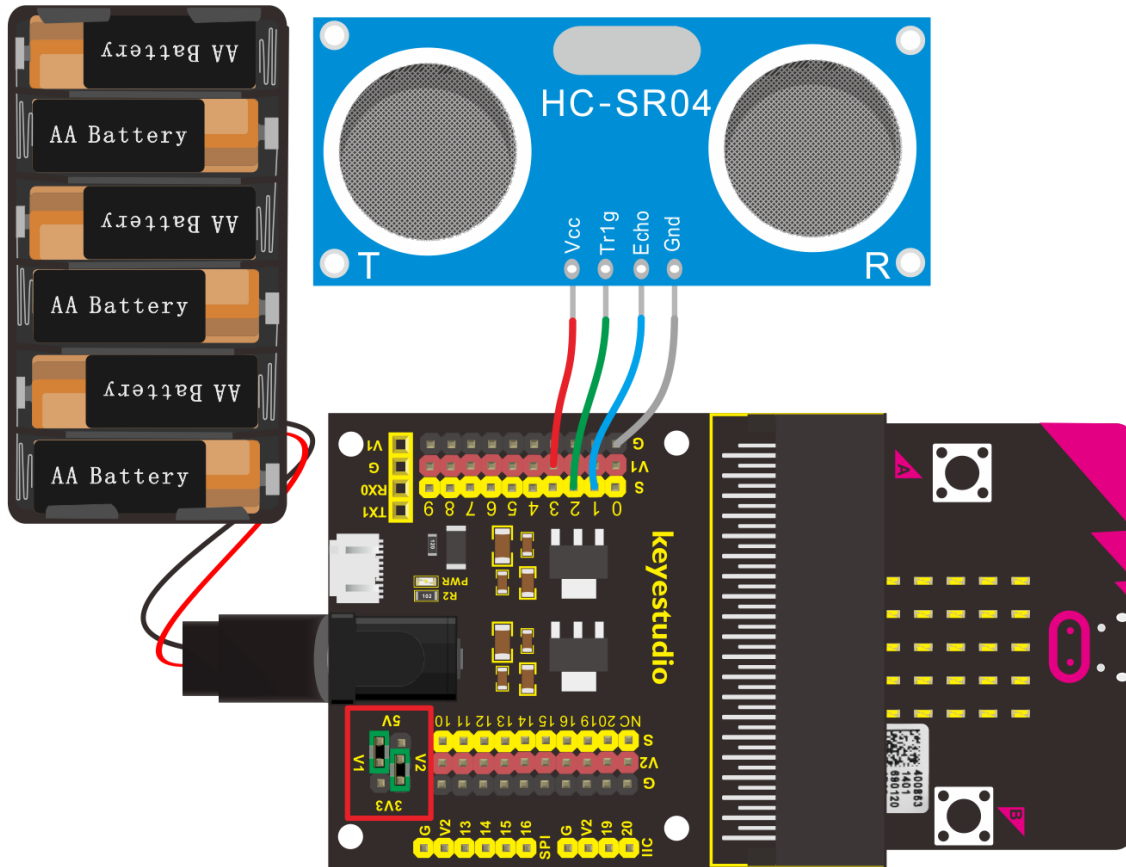

Test Code 1

```

on start
  led enable true

forever
  digital write pin P2 to 0
  wait (µs) 2
  digital write pin P2 to 1
  wait (µs) 10
  digital write pin P2 to 0
  set distance to pulse in (µs) pin P1 pulsed high integer + 58
  show number distance
  serial write value "distance(cm) = " distance
  pause (ms) 10
  
```

“on start” : command block only runs once to start program.

The program under the block “ forever” runs cyclically.

Set P2 to low level(0)

Delay in 2ms

Set P2 to high level(1)

Delay in 10ms

Set P2 to low level(0)

Set distance to


Micro:bit shows the detected distance value

Set distance(cm)=distance


Delay in 10ms


Code 2

Here you should add the package to set the code. Shown as follows:

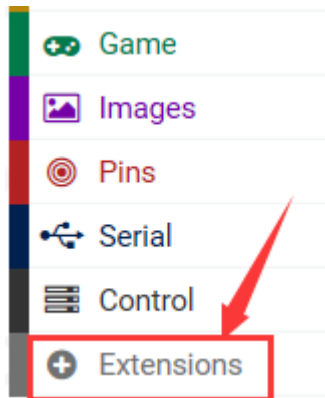

Then on the bar search the **"sonar"** , you should see as below.

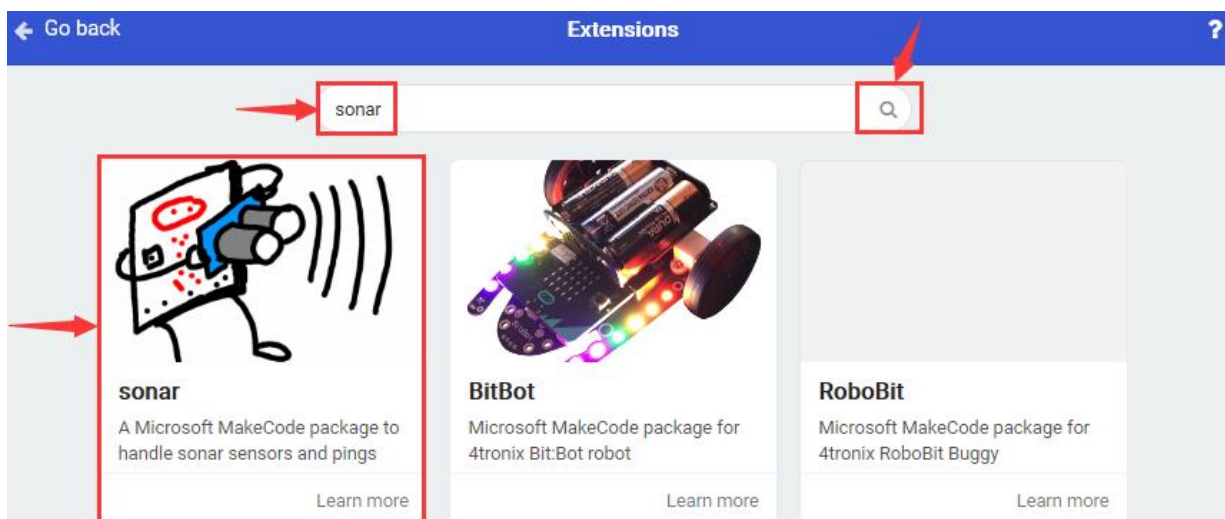

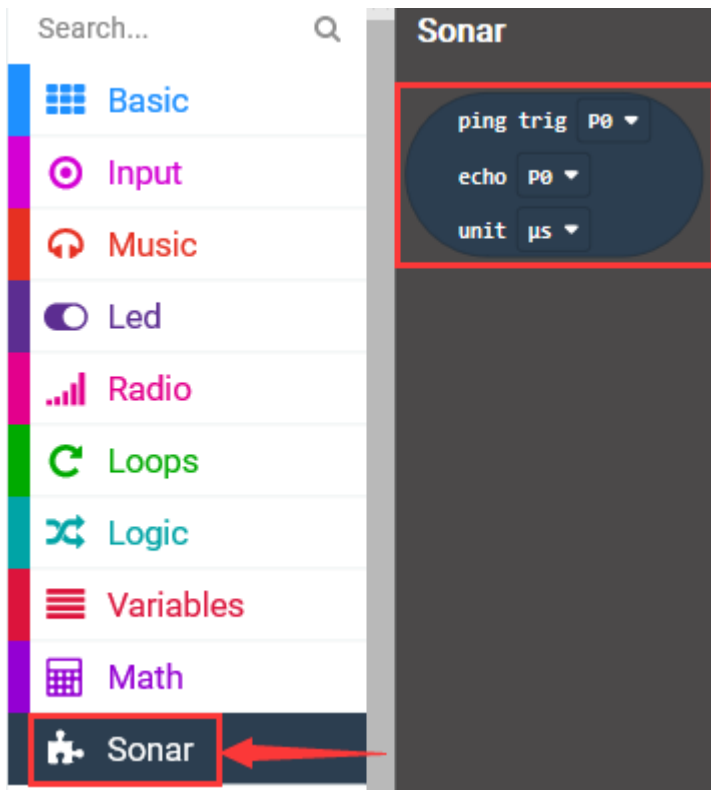


The code is as follows:

	<p>"on start" : command block only runs once to start program.</p> <p>Turn on dot matrix</p> <p>The program under the block " forever" runs cyclically.</p> <p>Set the detected distance value to item</p> <p>Micro:bit shows the detected distance value</p> <p>Serial writes the detected distance value</p> <p>Delay in 50ms</p>	
--	---	--

Test Results

Connect micro:bit to computer via USB cable and transfer code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

The detected distance value will be displayed as below:

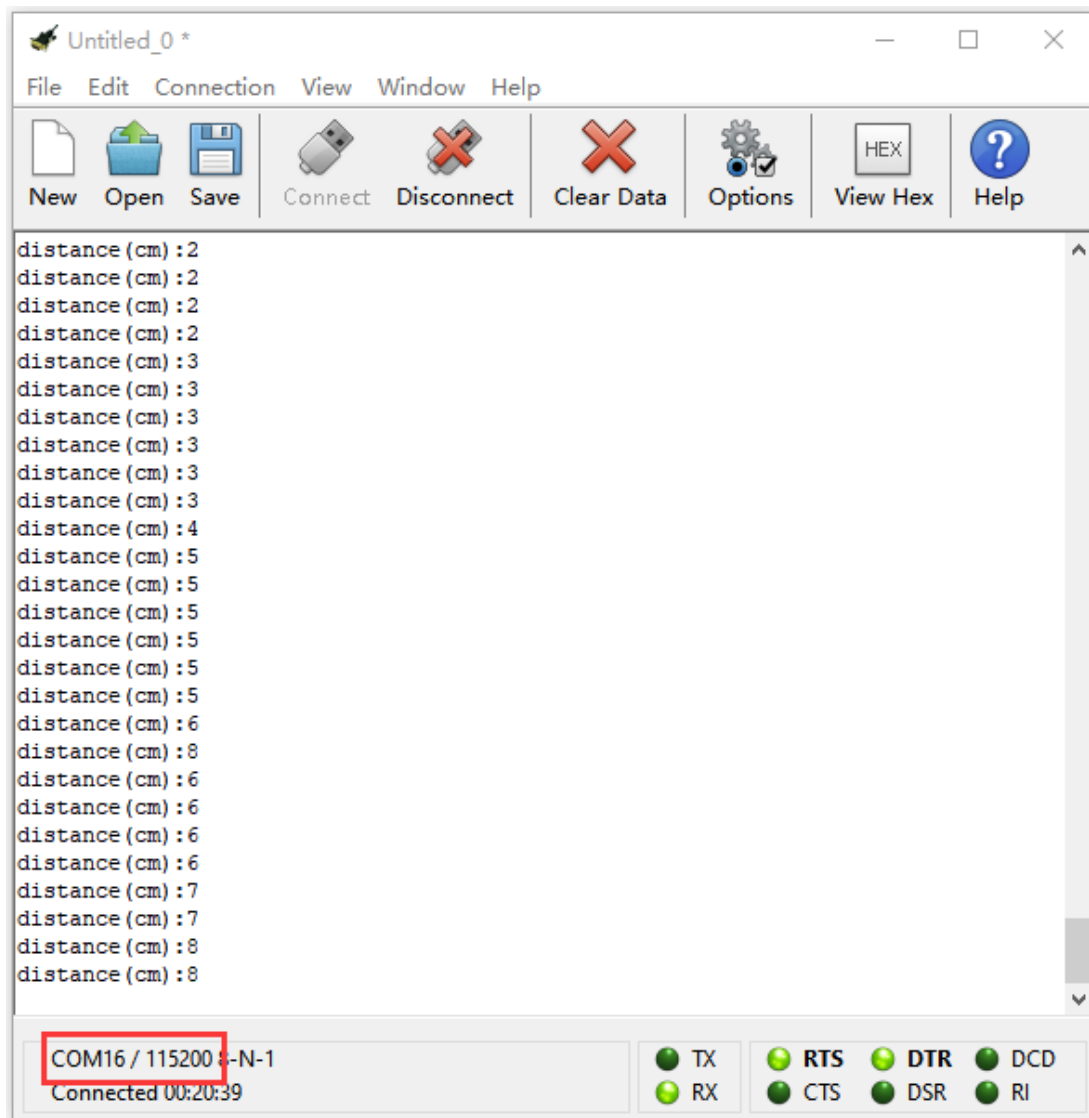

Project 34: Light Brightness

Overview

It is seen that sensors are everywhere in our daily life. Some public street lights automatically light up during the day and automatically go out at night. Why? In fact, those lights make use of a photosensitive element that can measure the brightness of external light.

In the evening, when outside brightness becomes lower, the street light is automatically controlled to be turned on. When it is bright during the day, the street light is automatically turned off.

In this project, you will learn how to use our keyestudio photocell sensor and micro:bit to control the brightness of external light. Show the result on 5*5 LED of micro:bit or serial monitor of CoolTerm software.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Photocell Sensor*1
- keyestudio Digital Red LED Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction



Photocell Sensor:


A photoresistor or light-dependent resistor (LDR) or photocell is a light-controlled variable resistor. Its principal is very simple.

The resistance of photoresistor changes with incident light intensity. If the incident light intensity is high, the resistance decreases; if the incident light intensity is low, the resistance increases.


This keyestudio photocell sensor is a semiconductor, integrated with a photoresistor, easy to use and very convenient for wiring. It has features of high sensitivity, quick response, spectral characteristic and R-value consistence.

It can be applied in light-sensitive detector circuits, intelligent switch design and light- and dark-activated switching circuits.

Connection Diagram

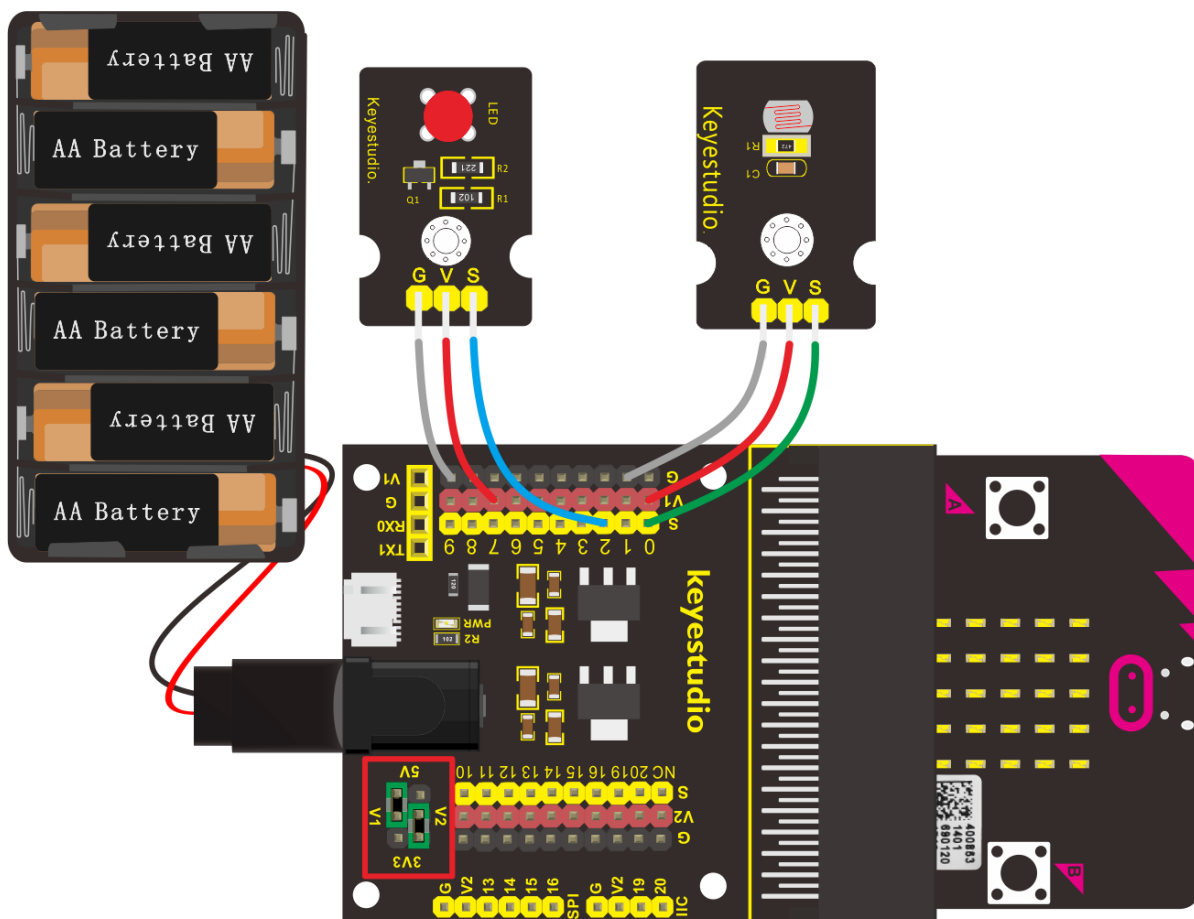

Test Code

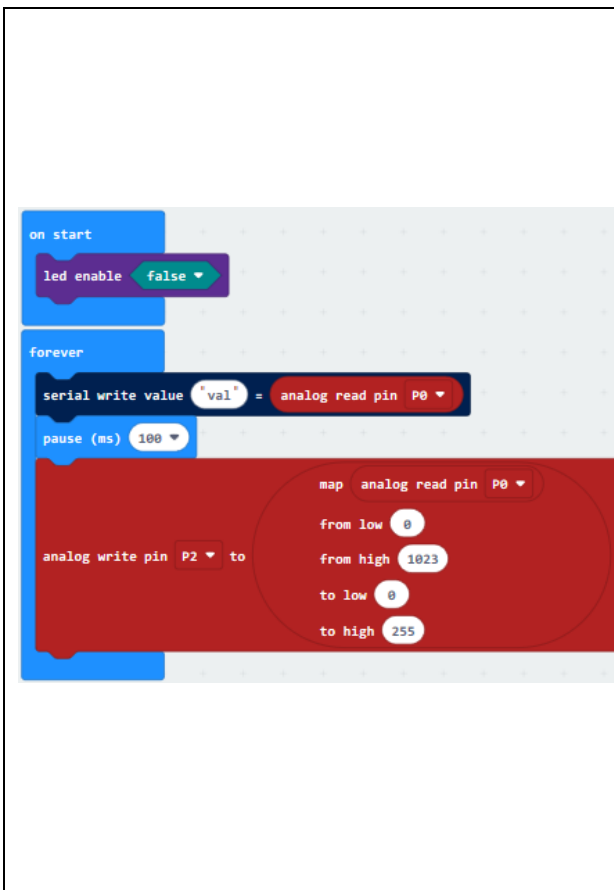

"on start" : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block "forever" runs cyclically.

Serial writes the analog signal of light intensity detected by photoresistor.

Delay in 100ms


Map the analog signal (0-1023) of light intensity to the analog value of LED

Test Results

Connect micro:bit to computer via USB cable and transfer code to micro:bit.

Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

CoolTerm monitor shows the corresponding analog signal, with the light intensity getting weaker, the analog value plummets gradually and red LED gets dimmer, otherwise, the analog value grows and red becomes brighter.

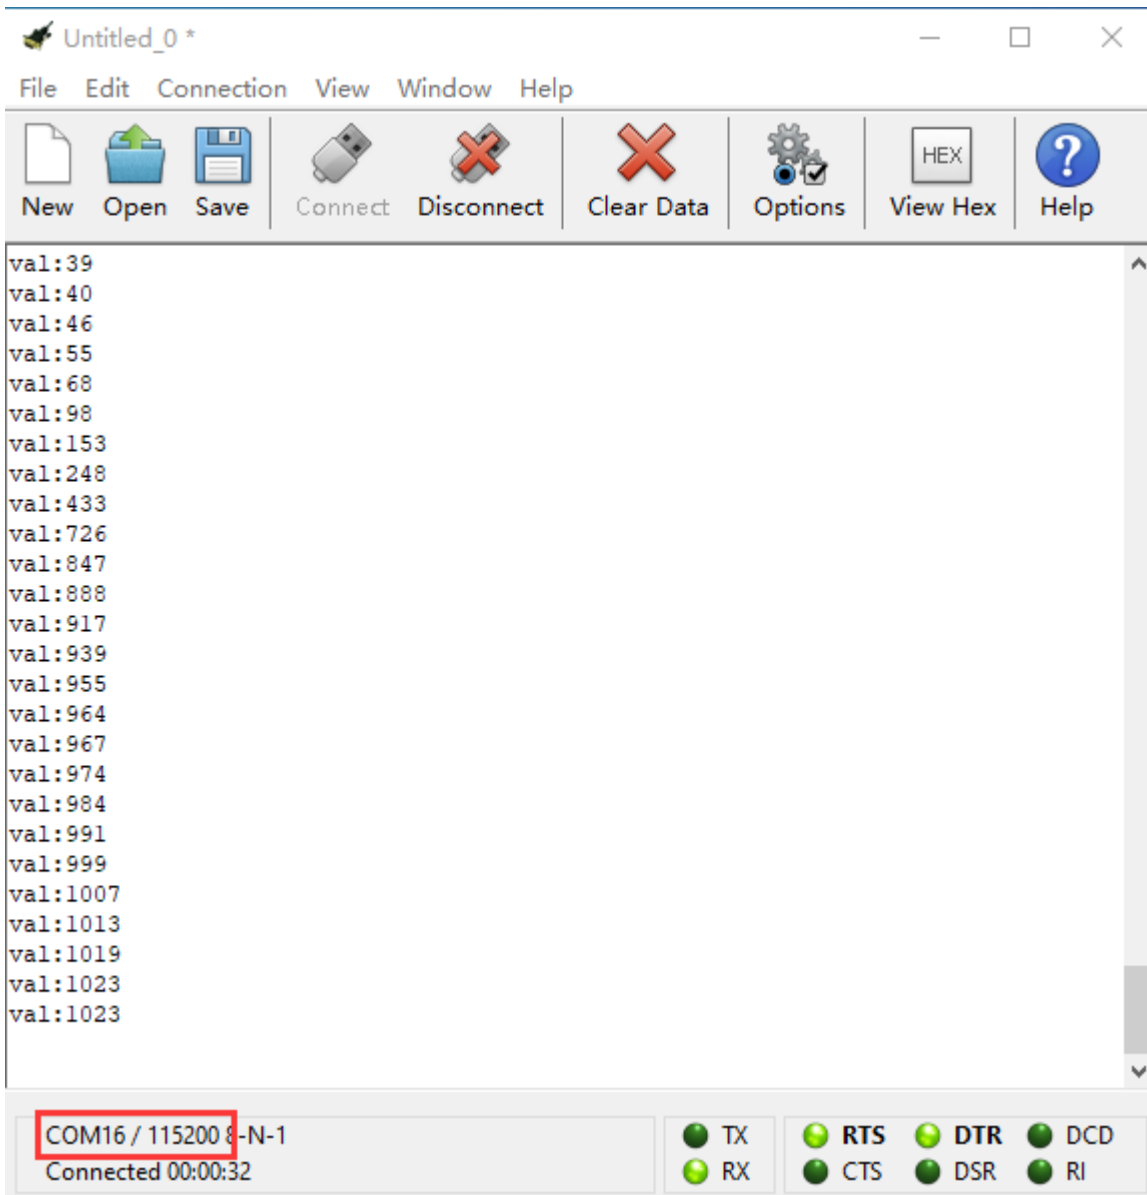

Project 35: Analog Temperature

Overview

In this project, we are going to detect another important index in the environment, that is, temperature. You will learn how to use an analog temperature sensor and micro:bit to display the analog value of current temperature on the micro:bit LED matrix or on the CoolTerm monitor.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Analog Temperature Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6



Component Introduction

Analog Temperature Sensor:


This analog temperature module is based on a thermistor whose resistance varies with temperature change.

It can detect surrounding temperature changes in real time.

Through the circuit connection, convert the resistance changes into voltage changes, then input the voltage changes into Analog Input of micro:bit via signal end. Actually the analog value of micro:bit can be calculated into temperature value via programming.

This sensor is convenient and effective, widely applied to home alarm system, gardening, and other devices.

Connection Diagram

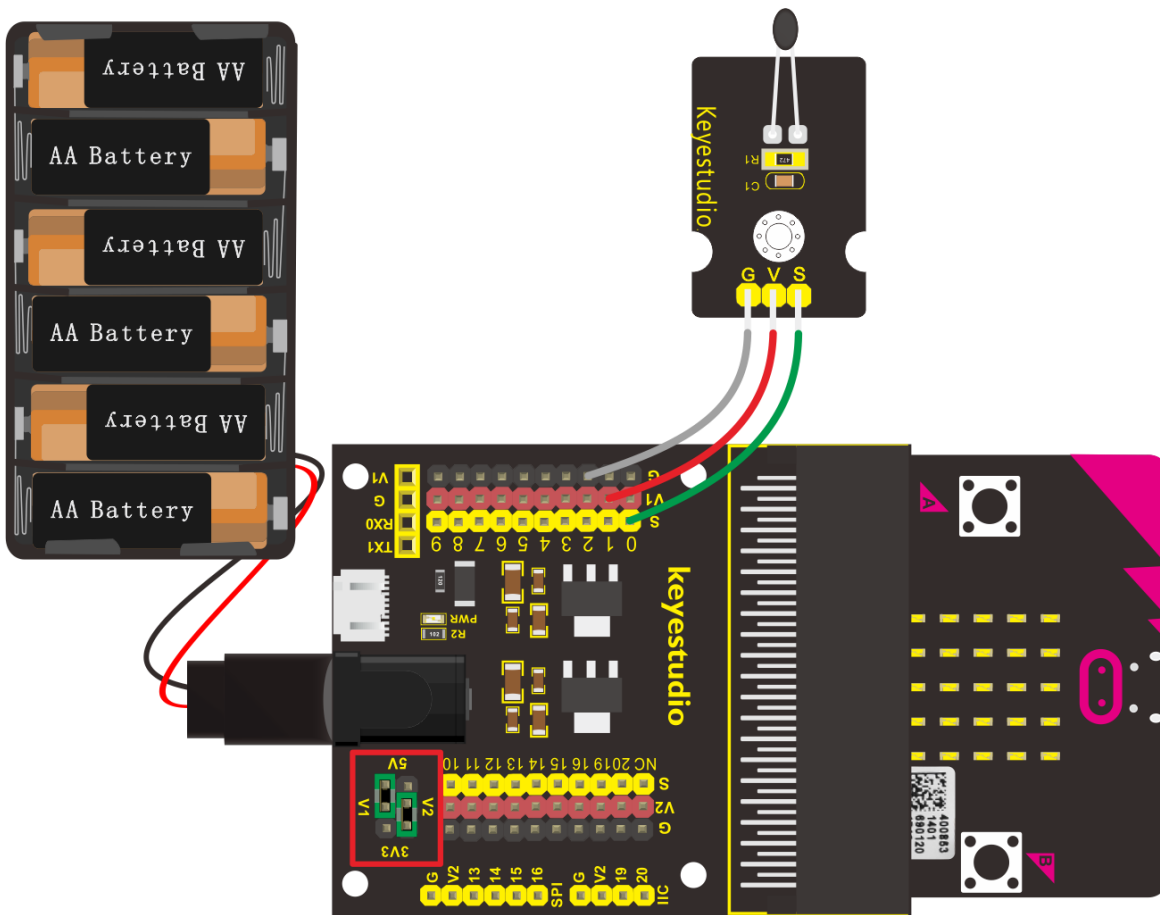

Test Code

```
on start
  clear screen

forever
  show number analog read pin P0
  pause (ms) 10
  serial write value "temperature" = analog read pin P0
```


"on start" : command block only runs once to start program.

The program under the block "forever" runs cyclically.

Micro:bit shows the analog signal detected by analog temperature sensor

Delay in 10ms


Serial writes the detected temperature signal

Test Results

Connect micro:bit to computer via USB cable and transfer code to micro:bit.

Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

Micro:bit displays the detected analog signal and CoolTerm serial monitor shows the analog temperature value, as shown below:

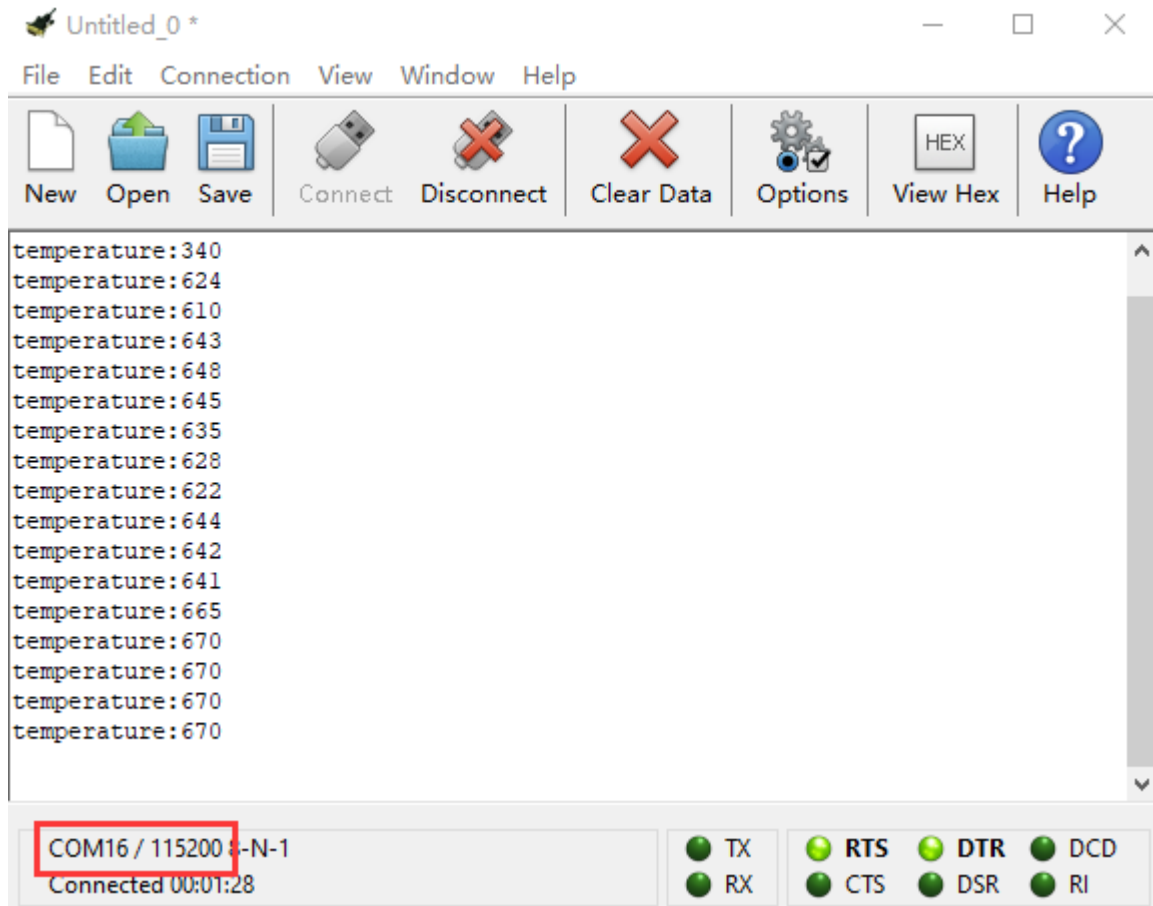

Project 36: Hear Footsteps

Overview

As for those corridor lights, when we walk through the corridor to make a sound, the corridor light will automatically light up, after that, quiet down, the lights are off. Why? Actually inside the lighting circuit, it has installed a sound sensor. When detects the sound, light is turned on, or else LED off.


In this lesson, we connect an analog sound sensor to P0 of micro:bit, then detect the outside sound via reading the analog value of P0.

The greater the external sound, the greater the analog value.

You can see the analog value is displayed on the micro:bit LED matrix, or check it from serial monitor of CoolTerm software.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Analog Sound Sensor*1
- keystudio Digital Red LED Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

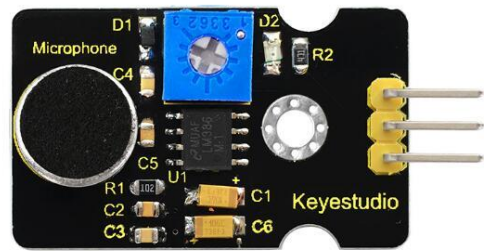


Component Introduction

Analog Sound Sensor Module:

This analog sound sensor module is typically used in detecting the ambient sound. You can use it to make some interactive works, such as a voice switch.

Connection Diagram

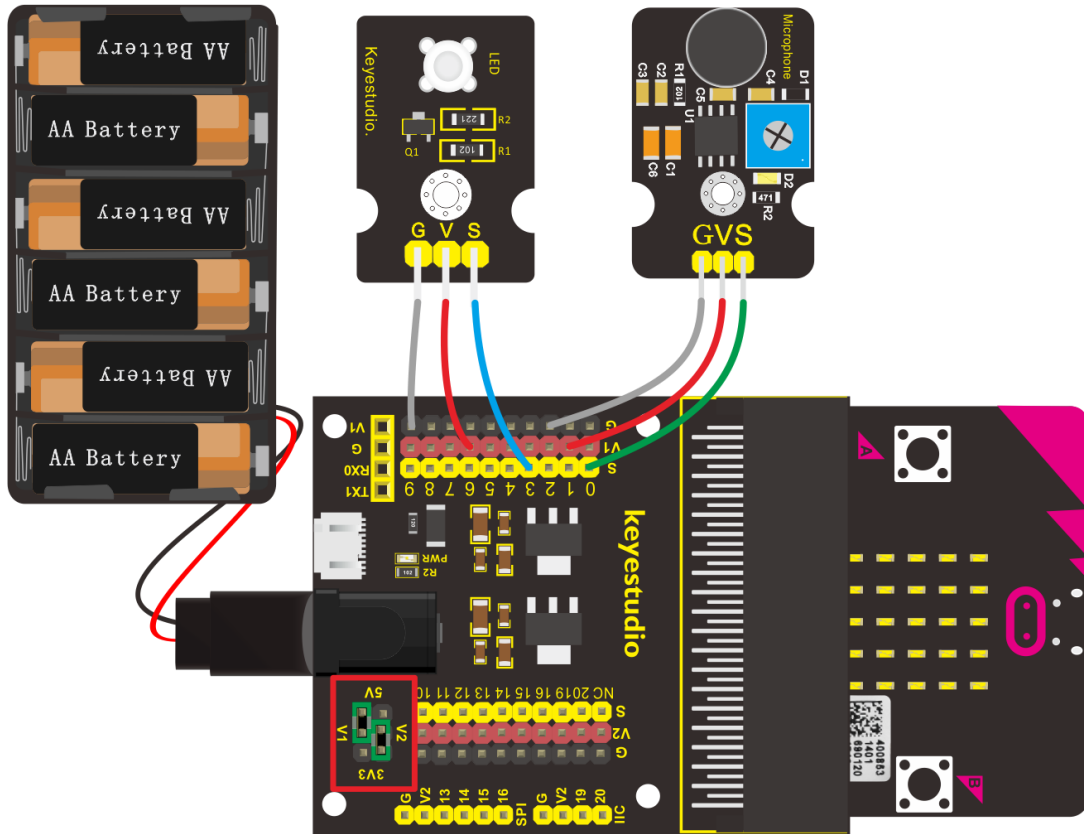

Test Code

(Note: you could adjust the sound value)

```

on start
  led enable false

forever
  serial write value "voice" = analog read pin P0
  if analog read pin P0 > 100 then
    digital write pin P3 to 1
    pause (ms) 3000
  else
    digital write pin P3 to 0
  
```

“on start” : command block only runs once to start program.
Turn off LED dot matrix


The program under the block “forever” runs cyclically.

Serial inputs voice=the analog signal read by sound sensor
If the analog signal read by P0 is more than 100, the program under then block will be executed.
Set P3 to high level(1) to light up LED
Delay in 3000ms
When the analog signal read buy $P0 \leq 100$, the program under else block will be executed.
Set P3 to low level(0) to turn off LED

Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

You could view the results on CoolTerm serial monitor. When the analog value of sound exceeds 100, LED will be on; otherwise, LED off.

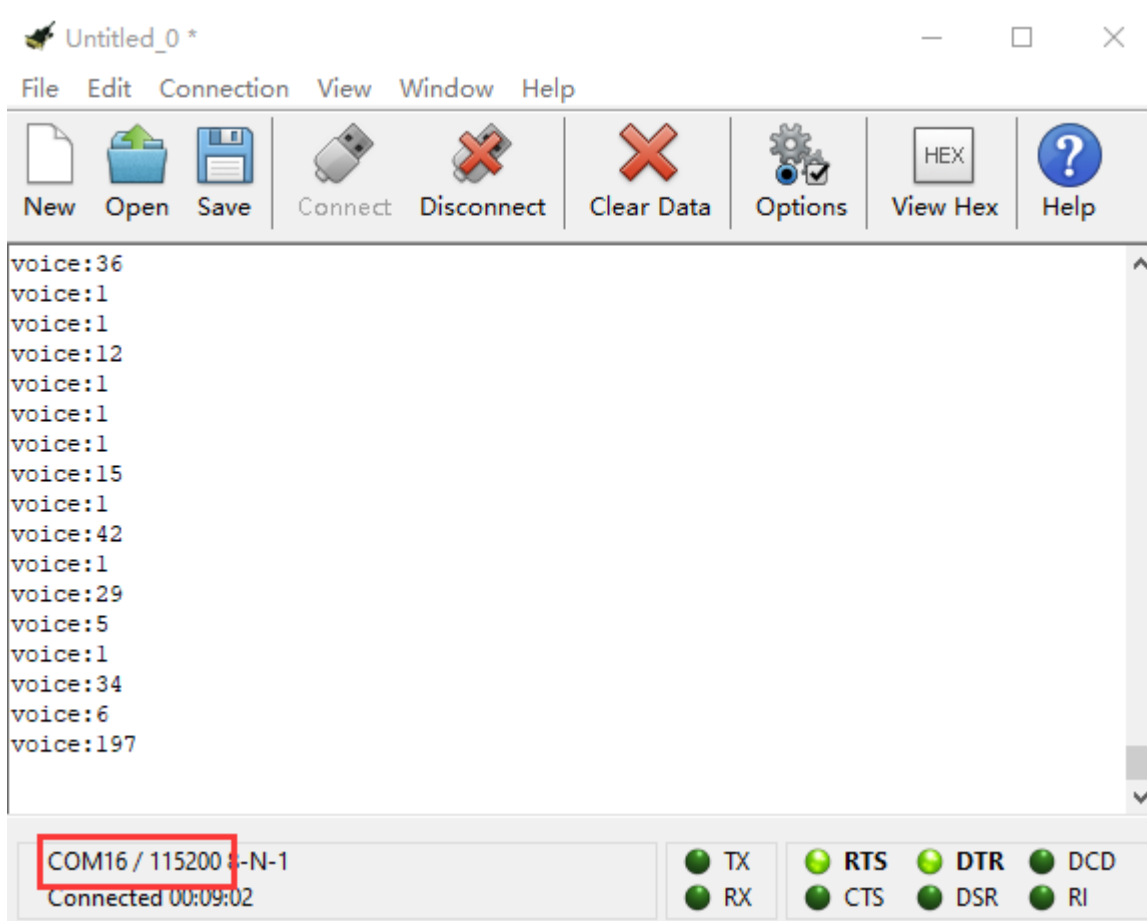

Project 37: Rotary Potentiometer

Overview

In this experiment, the signal end of keyestudio Analog Rotation Sensor is connected to micro:bit P0. By reading the analog value of P0, rotate the potentiometer, you should see the analog value is changed on the micro:bit LED matrix.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Analog Rotation Sensor*1
- keyestudio Digital Red LED Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Analog Rotation Sensor:

This analog rotation sensor is based on a potentiometer. It actually uses a variable resistor. When rotate the potentiometer, it actually changes the resistance of variable device.

In the experiment, set well the circuit, convert the resistance changes into voltage changes, then input the voltage changes into Analog Input of micro:bit

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block “forever” runs cyclically.

Serial writes the analog signal of potentiometer

Delay in 100ms


Map the analog signal(0-1023) of potentiometer to the analog value(0-255) of LED

Test Results

Connect micro:bit to computer via USB cable and transfer code to micro:bit.

Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

Adjust the potentiometer, when the analog value grows, red LED will become brighter, on the contrary, the smaller the analog value is, the darker the red LED gets.

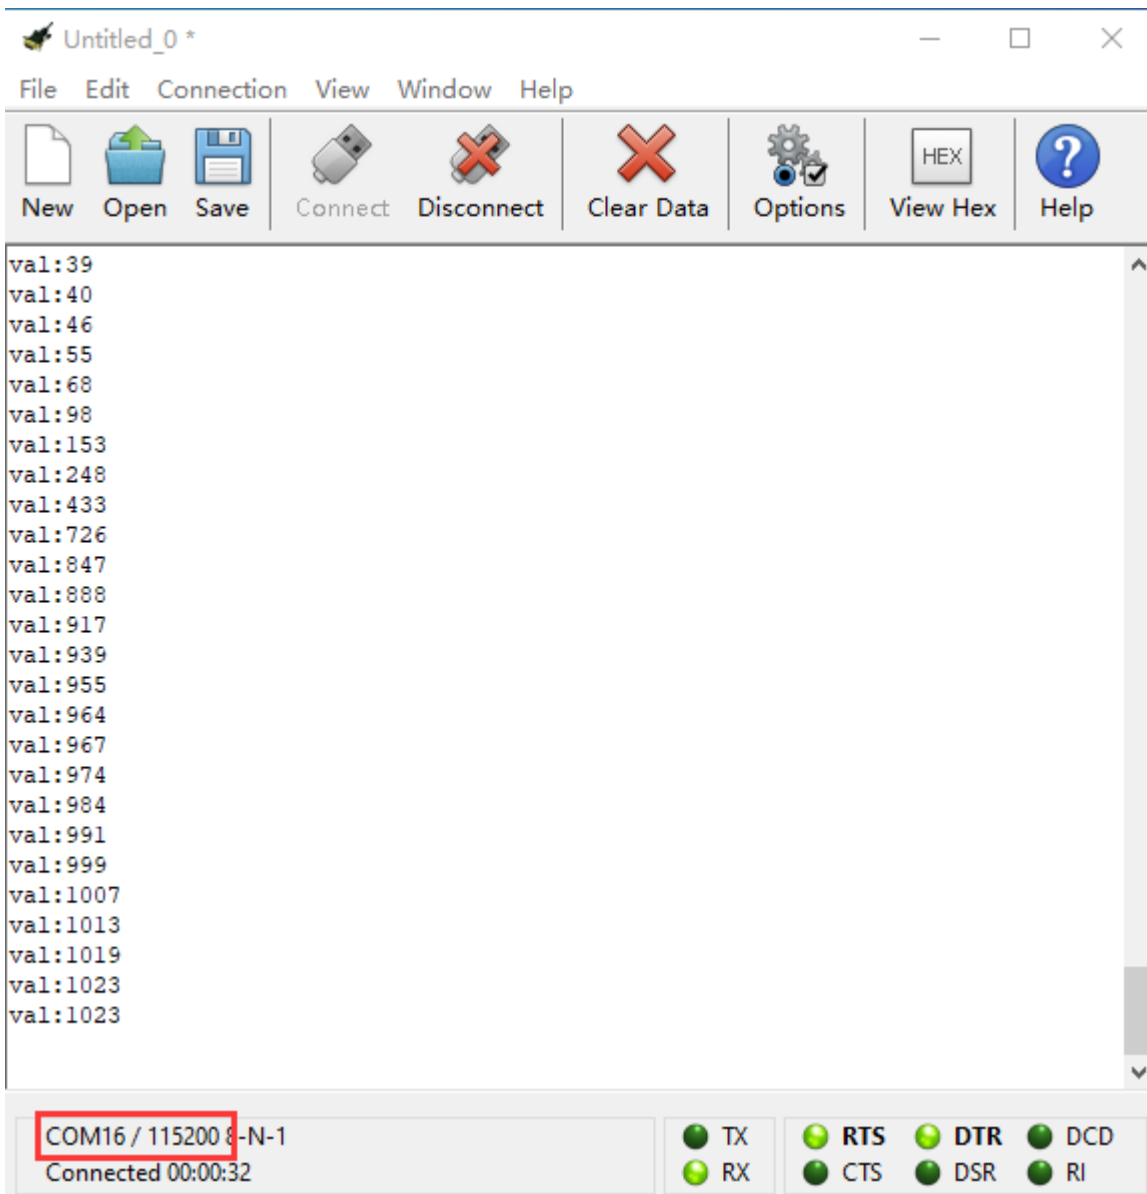

Project 38: Alcohol Content in the Air

Overview


In this project, you will learn how to use an analog Alcohol sensor and micro:bit to detect the alcohol content in the air.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Analog Alcohol Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Analog Alcohol Sensor:

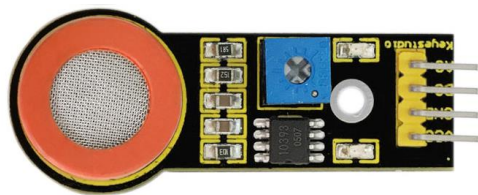


This analog sensor-MQ3 is suitable for detecting the alcohol. It can be used in a breath analyzer. It has a good selectivity because it has higher sensitivity to alcohol and lower sensitivity to Benzine.

The sensitivity can be adjusted by rotating a potentiometer on the sensor.

It has two signal pins, Analog A0 and Digital D0. The higher the alcohol concentration, the higher the A0 value.

When both alcohol concentration and A0 value reach a certain value, D0 changes from low level to high level,

Connection Diagram

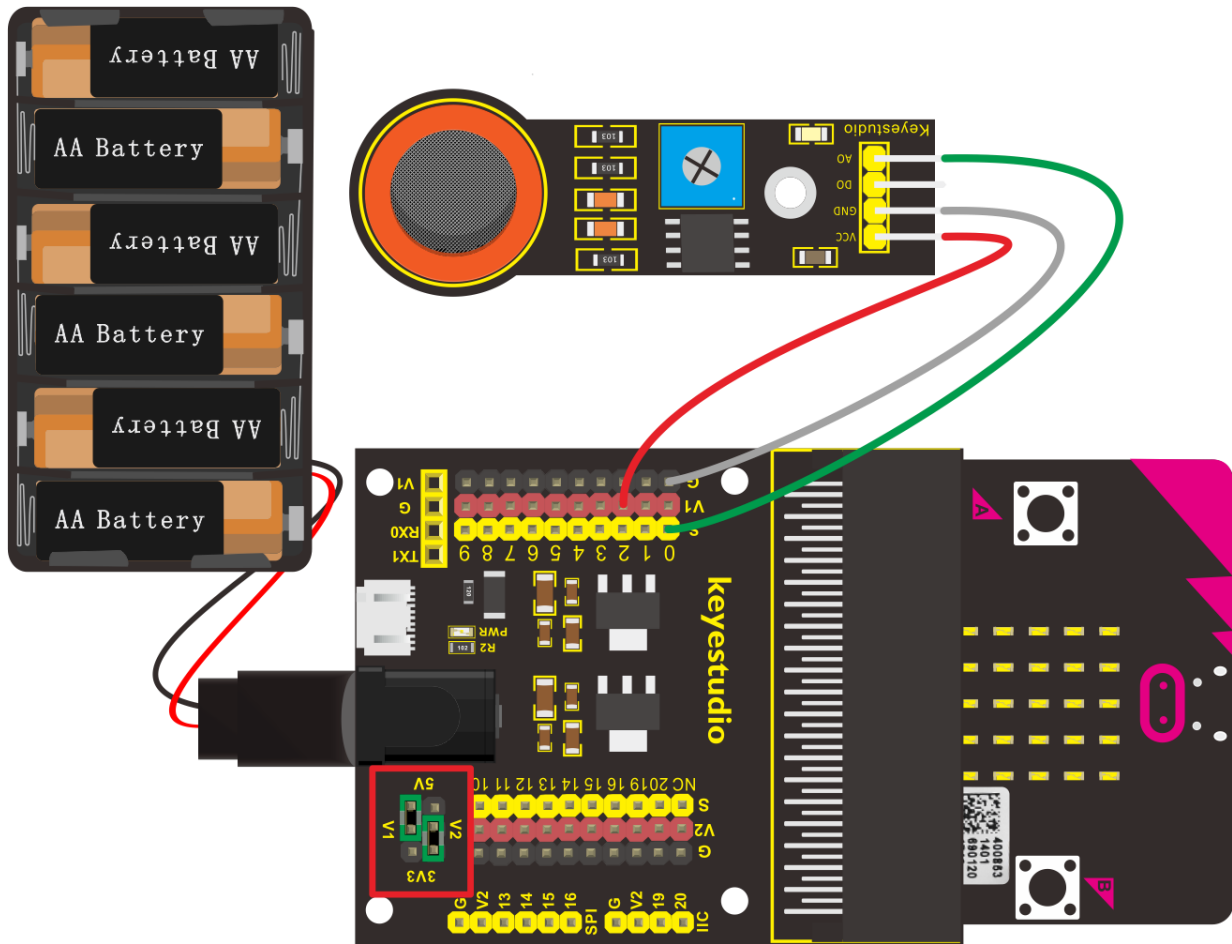

Test Code

```

on start
  led enable false

forever
  serial write value "analog signal" = analog read pin P0
  pause (ms) 100
  
```

"on start" : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block "forever" runs cyclically.

Serial writes the analog signal read by alcohol sensor


Delay in 100ms

Test Results

Wire components up, plug in external power and transfer code to micro:bit, we could adjust potentiometer to make LED1 at the critical point between on and off state, besides, the sensitivity is best.

Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

We make alcohol gas close to alcohol gas sensor, the analog value gets larger and LED1 becomes brighter, conversely, the analog value gets smaller and LED1 turns off.

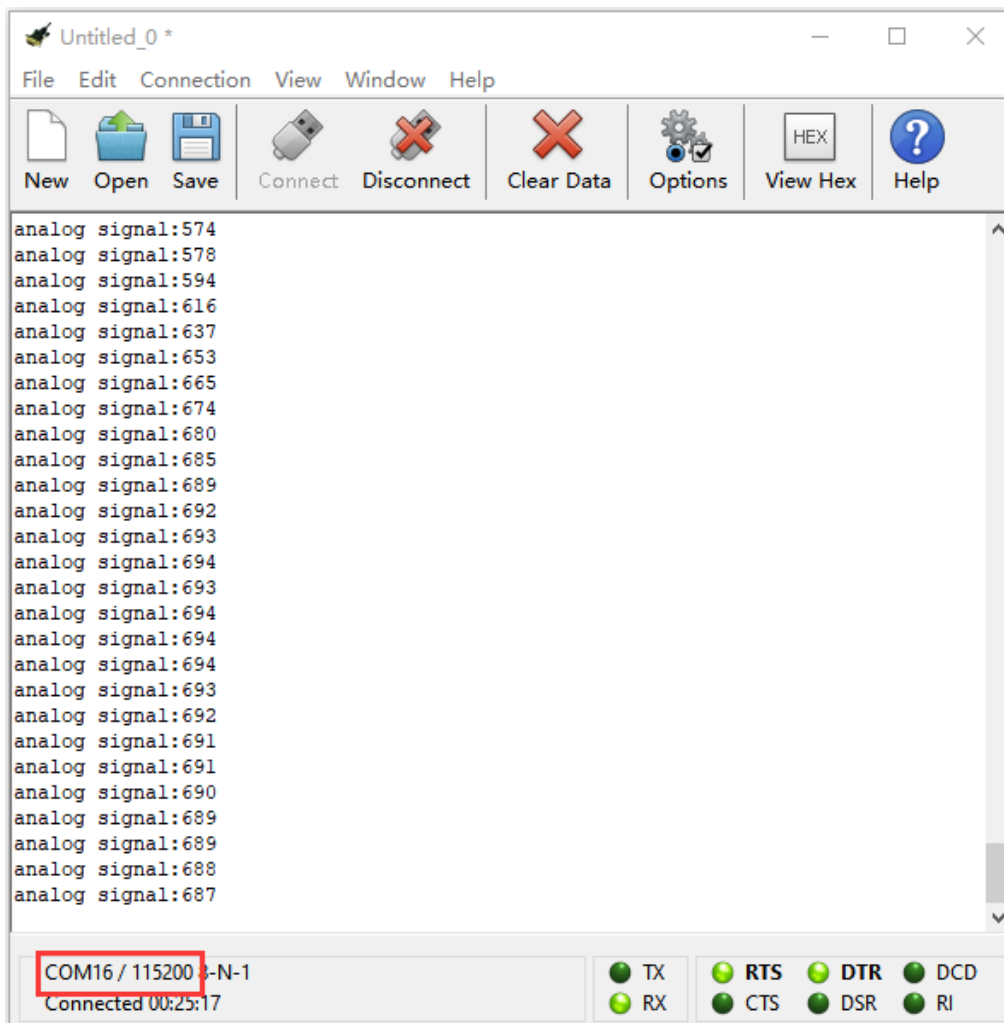

Project 39: Flammable Gas in the Air

Overview

In real life, gas leakage events often occur. If toxic or flammable and explosive gas are leaked out, there exists a huge potential hazard to people's health. So people have developed different kinds of sensors to detect various gas contents in the air, which can timely alarm to process the leaking gas.

In this project, you will learn how to use an analog gas sensor and micro:bit to detect the flammable gas in the air. Show the analog value of gas on the LED matrix of micro:bit or check it on the serial monitor.

Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Analog Gas Sensor*1
- keystudio Digital Buzzer Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Analog Gas Sensor:

This analog gas sensor is used to detect combustible gases in the air, such as liquefied Gas, propane, hydrogen Gas, etc.

Keystudio Analog Gas Sensor has high sensitivity to liquefied Gas, propane and hydrogen, ideal for testing natural Gas and other combustible gases.

It is a low-cost sensor suitable for a variety of applications.


It has high sensitivity and quick response. The sensitivity can be adjusted by rotating a potentiometer on the sensor.

Keystudio Analog Gas Sensor has two signal terminals, Analog port A0 and digital port D0.

The higher the concentration of combustible gas, the higher the A0 value is.

When both combustible gas concentration and A0 reach a certain value, D0 changes from low level to high level, which can be controlled by potentiometer.

Connection Diagram

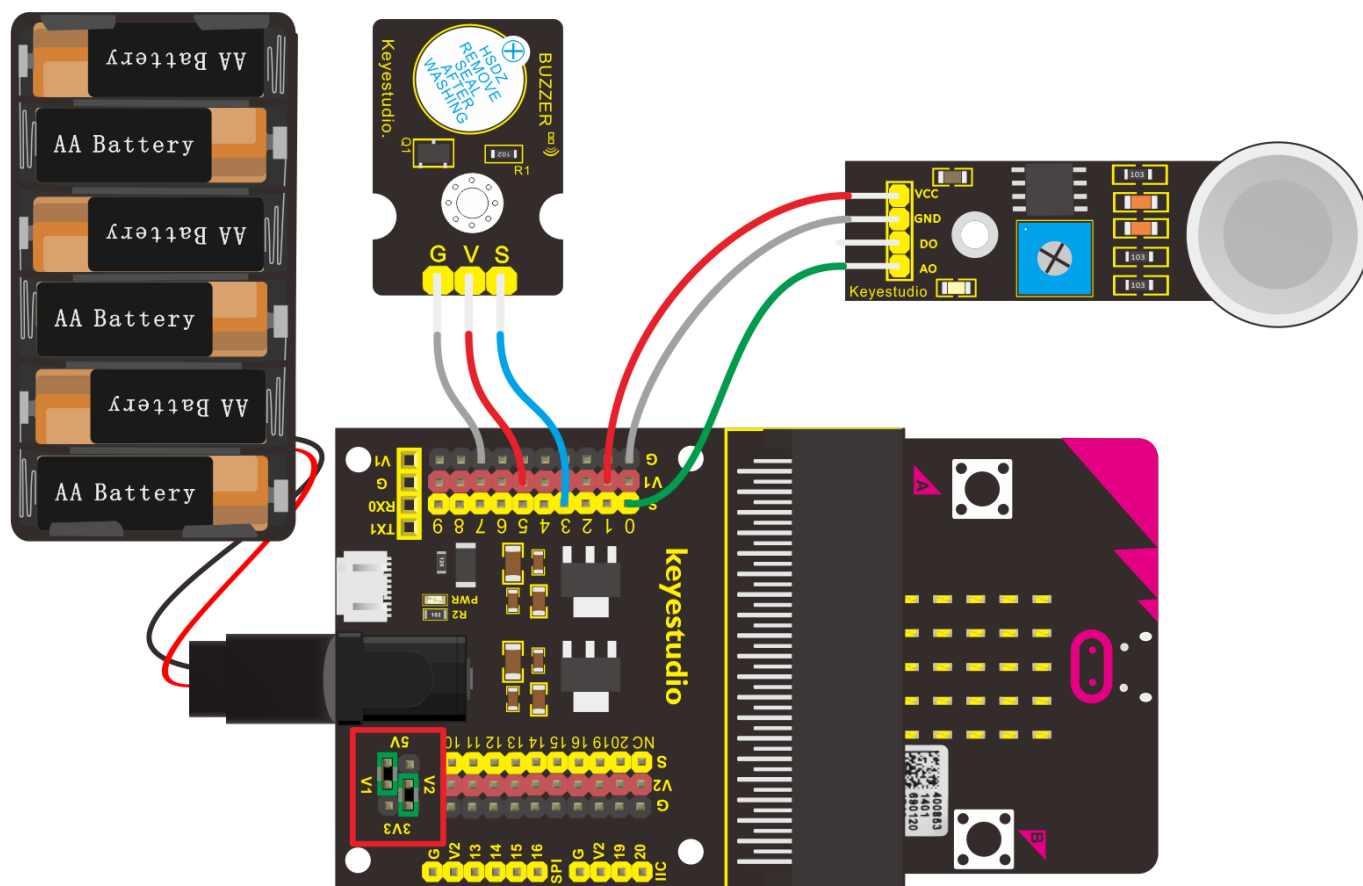

Test Code

```
on start
  led enable false

forever
  serial write value "analog signal" = analog read pin P0
  if analog read pin P0 > 600 then
    digital write pin P3 to 1
  else
    digital write pin P3 to 0
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block “forever” runs cyclically.

Serial writes the analog signal read by analog gas sensor

If the analog value > 600 , the program under then block will be executed

Set P3 to high level(1) to make buzzer emit sound.

When the analog value ≤ 600 , the program under else block will be executed

Set P2 to low level(0), buzzer doesn't make a sound


Set P3 to low level(0) to stop buzzer to emit sound.

Test Results

Wire components up, plug in external power and upload code to micro:bit, we could adjust potentiometer to make LED1 at the critical point between on and off state, besides, the sensitivity is best.

Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

Point firelighter to analog gas sensor, the CoolTerm shows that the analog value is getting larger and LED1 is on. When the value exceeds 600, buzzer emits sound, otherwise, it doesn't.

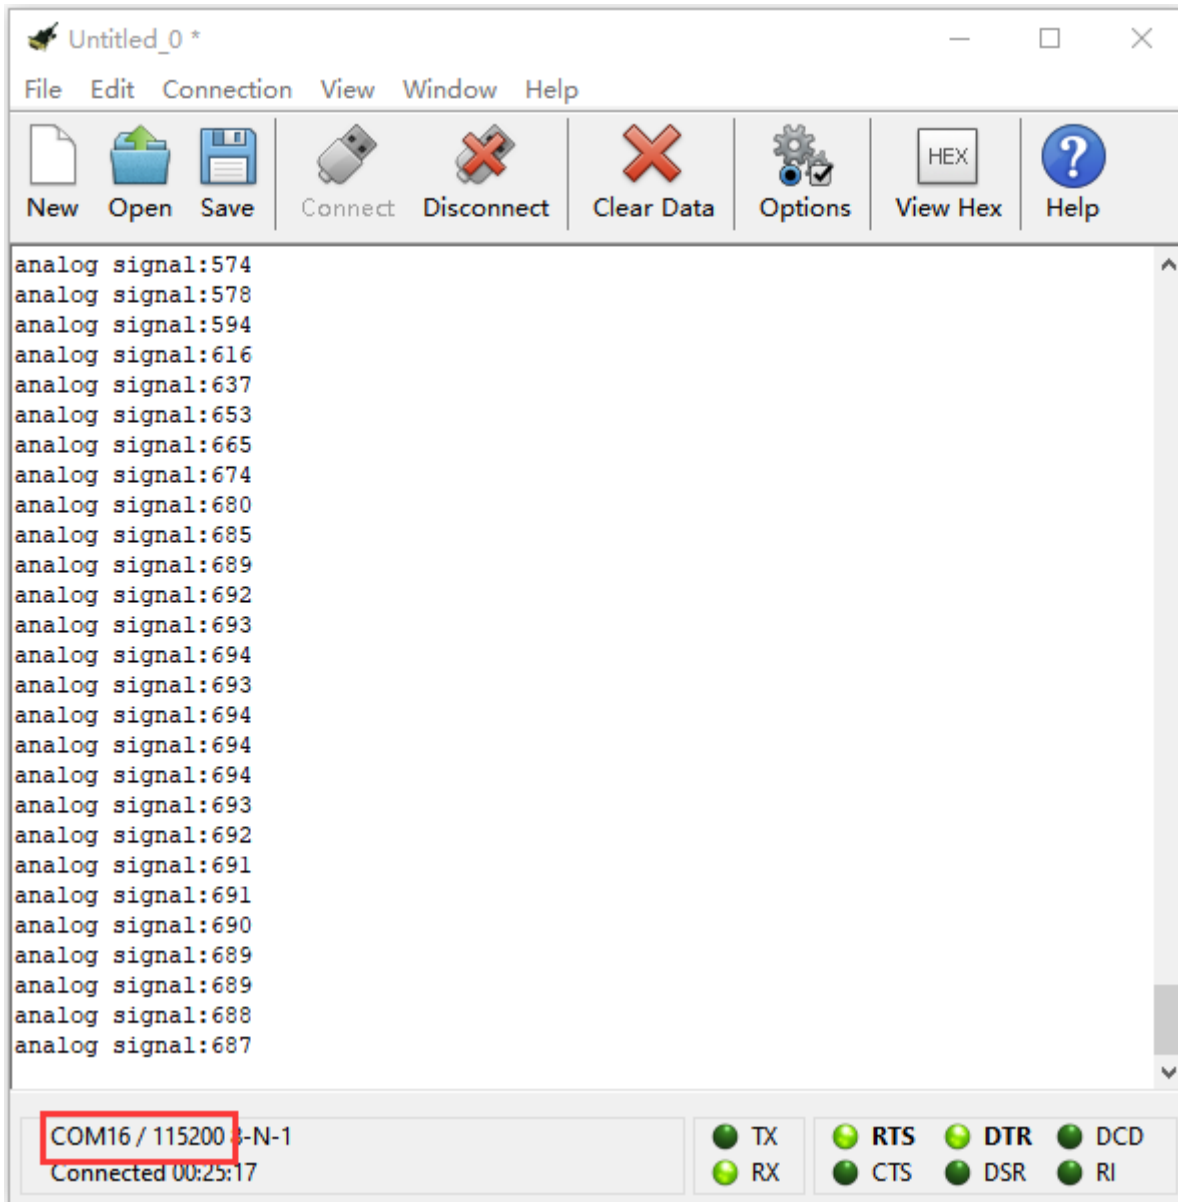

Project 40: Ambient Temperature Detection

Overview

In the previous project 23, we only get the analog value of temperature in the current environment. Now, we are going to use a LM35 linear temperature sensor to detect the ambient temperature. Finally get the specific temperature value of current ambient via calculating, and display it on the micro:bit LED matrix or on the CoolTerm monitor.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio LM35 Linear Temperature Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

LM35 Linear Temperature Sensor:

It is based on a semiconductor LM35 temperature sensor. It can be used to detect ambient temperature. This sensor offers a functional range among 0 degree Celsius to 100 degree Celsius. Sensitivity is 10mV per degree Celsius. The output voltage is proportional to the temperature.

There exists a linear relationship between Signal output voltage and Celsius scale. The formula is as follows: at 0°C, output 0V; every 1°C increase, the output voltage will increase 10mV.

Connection Diagram

"on start" : command block only runs once to start program.

Open LED dot matrix

The program under the block "forever" runs cyclically.

Set Temp to $300 \times \text{analog read pin p0 integer} \div 1023$


Micro:bit displays the temperature value

Serial writes the temperature value

Delay in 100ms

Test Results

Wire up components, plug in external power and transfer code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect. Micro:bit and CoolTerm monitor display the current temperature, as shown below:

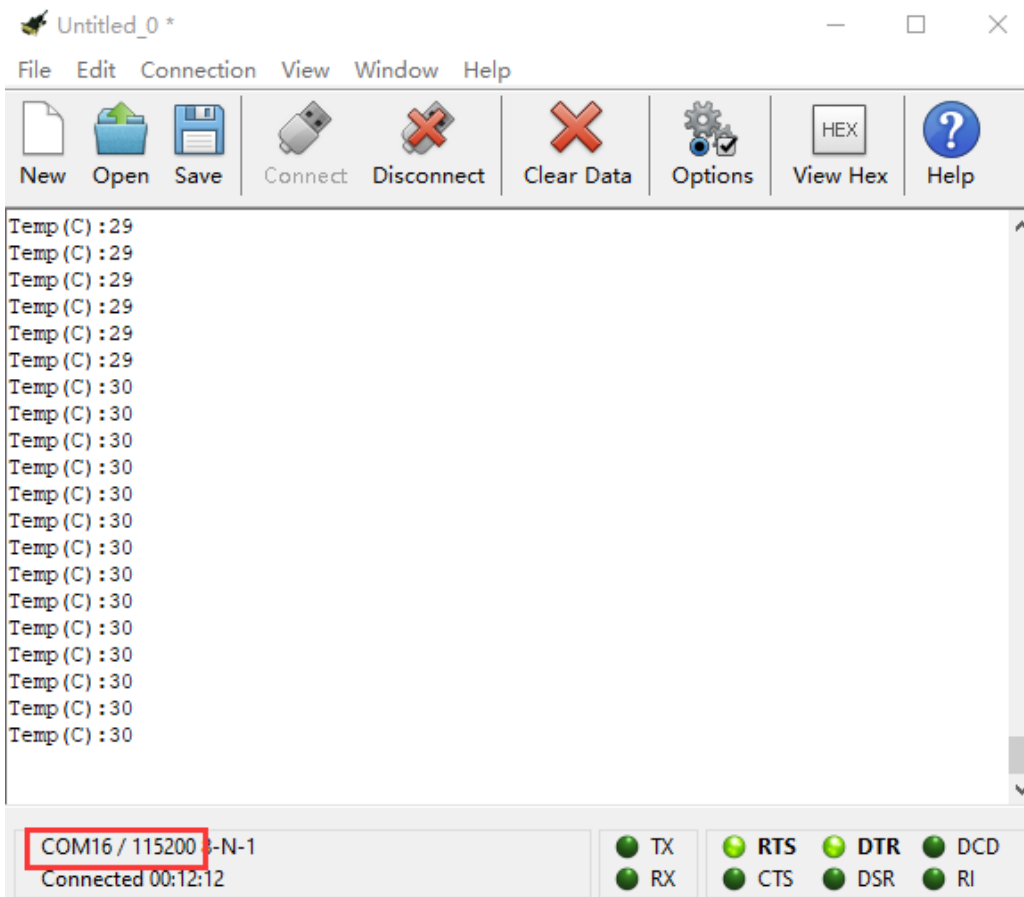

Project 41: Ambient Light

Overview

This lesson is a little bit similar to the previous illumination test by a photocell. But this time we will use keystudio TEMT6000 light sensor whose sensitivity is better than a photocell. You will learn how to use a TEMT6000 sensor and micro:bit to test the ambient light. Show the analog value on the micro:bit LED matrix or on the CoolTerm monitor.

Component Required:

- Micro:bit main board*1

- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- TEMT6000 Ambient Light Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction


TEMT6000 Ambient Light Sensor:

This TEMT6000 light sensor is mainly composed of a high visible photosensitive light (NPN type) triode. It can capture the tiny light changes and magnify it about 100 times, which is easily recognized by the microcontroller for AD conversion.

Its response to visible light illumination is similar to that of the human eye, so it can judge the intensity of ambient light. But note that it does not react well to IR or UV light.

This sensor is available for friendly interaction applications.

Connection Diagram

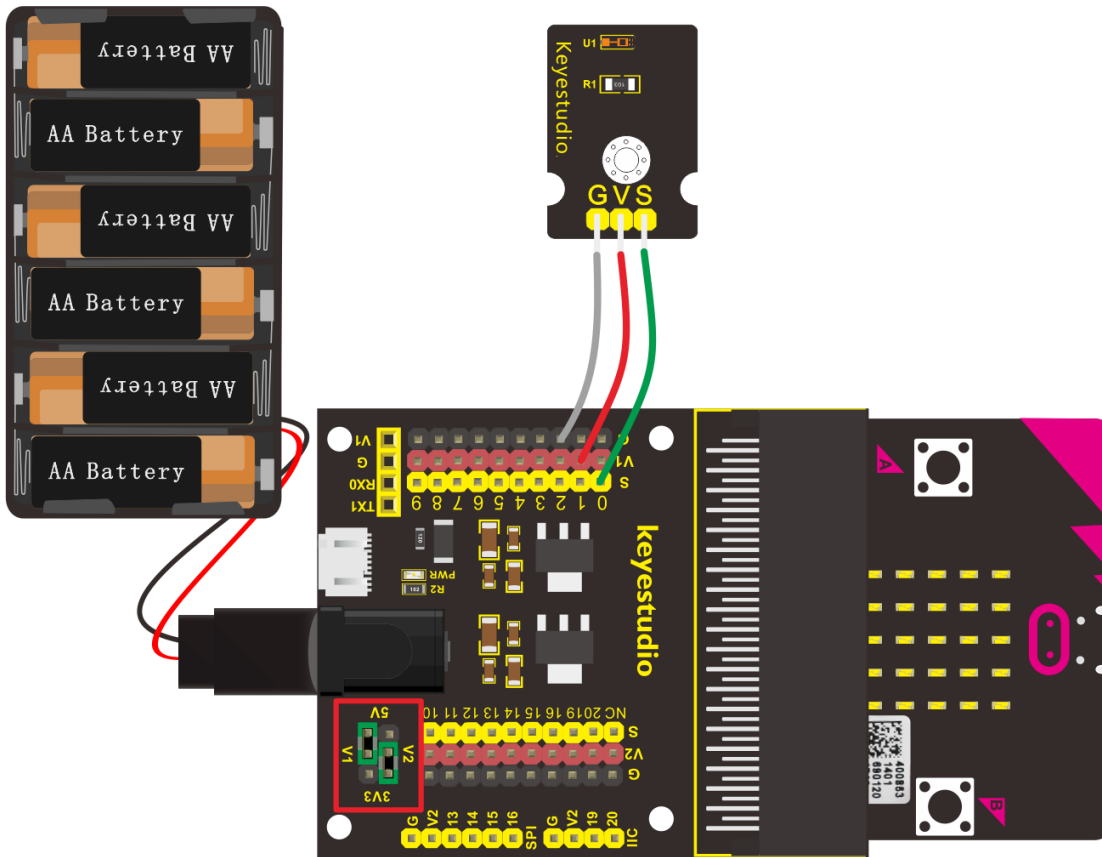

Test Code

```

on start
  led enable false

forever
  serial write value "value" = analog read pin P0
  pause (ms) 100
  
```

“on start” : command block only runs once to start program.


Turn off LED dot matrix on micro:bit

The program under the block “forever” runs cyclically.

Serial writes the light intensity signal by ambient light sensor

Serial writes the analog signal read by TEMT6000 ambient light sensor.


Delay in 100ms



Test Results

Wire up components, plug in external power and transfer code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

The CoolTerm shows the light intensity, the stronger the light intensity, the larger the analog value, as shown below:

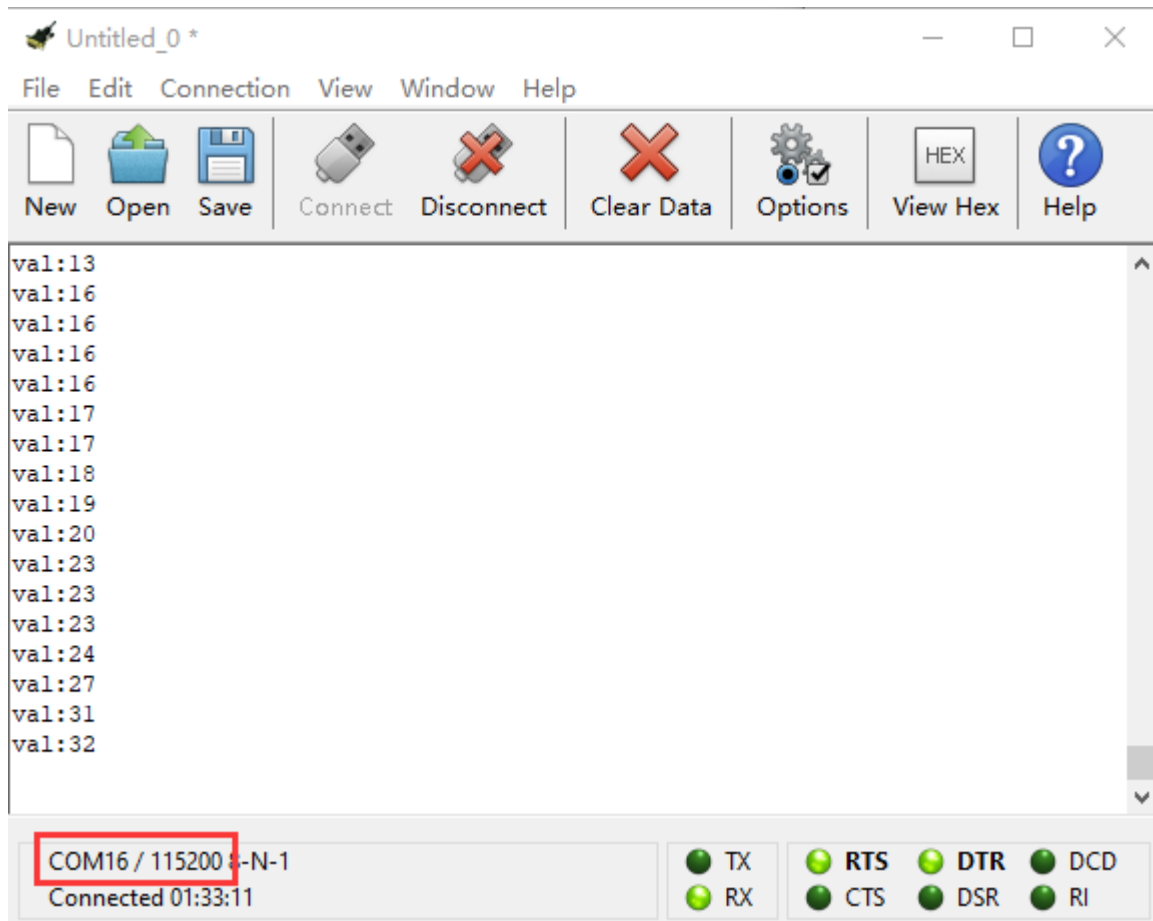

Project 42: Detect Soil Humidity

Overview

In life, you may often water some flowers and plants from time to time to prevent them from withering, but not need to pour more. It may requires experience. So can we make a system that allows the machine to automatically water the plants' soil when it is dry? Of course yes.

In this project, you will learn how to use a soil sensor and micro:bit to detect the humidity of your plants' soil. Display the analog value on the micro:bit LED

matrix or on the serial monitor. The greater the humidity, the greater the analog value.

Note: We recommend you to purchase a water pump(not included in this kit) and make an automatic watering system by relay module.


Component Required:

- Micro:bit main board*1
- Keystudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keystudio Soil Humidity Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6


Component Introduction

Soil Humidity Sensor:

This simple soil sensor is ideal for detecting the humidity of your plants' soil. If the soil lacks the water, the analog value output by the sensor will decrease, otherwise, it will increase.

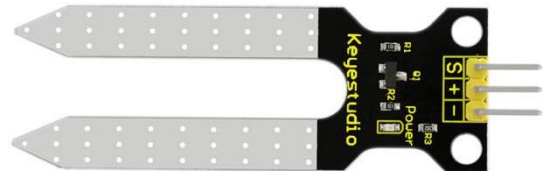

Connection Diagram

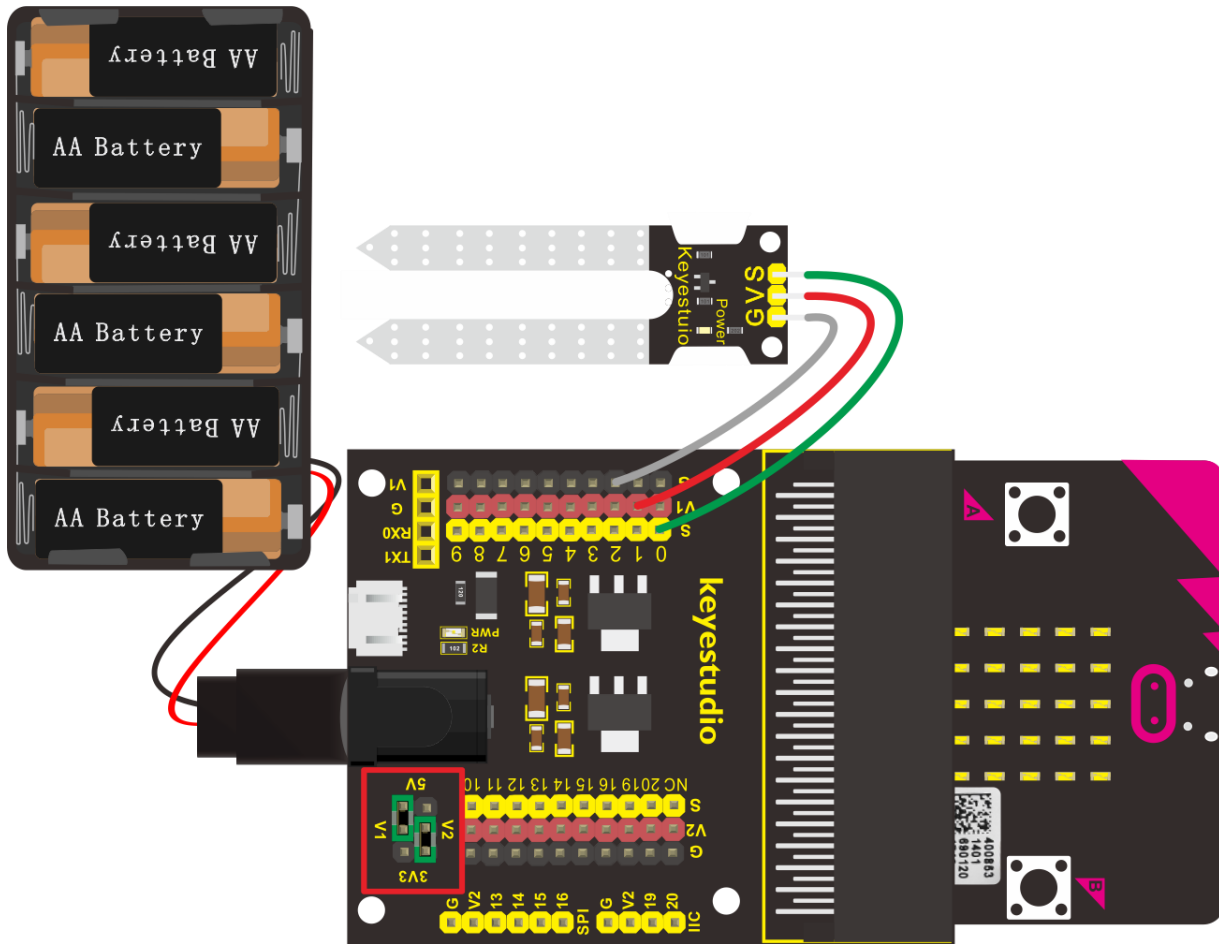

Test Code

```
on start
  led enable true

forever
  serial write value "value" = analog read pin P0
  if analog read pin P0 > 500 then
    show icon [Keypad Icon]
  else
    show icon [Keypad Icon]
```

"on start" : command block only runs once to start program.

Turn on LED matrix

The program under the block "forever" runs cyclically.

Serial writes value= analog signal read by soil humidity sensor

If analog value is more than 500, the program under then block will be executed.

Micro:bit shows "♥"

When the analog value ≤ 500 , the program under else block will be executed.

If analog value ≤ 500 , the program under else block will be executed.

Micro:bit shows "📶"

Test Results

Wire up according to connection diagram. Plug in external power and upload code to micro:bit, open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect. Insert soil humidity sensor into soil. The humidity value varies with the humidity. The higher the humidity is, the larger the humidity value is.

When the humidity value is more than 500, micro: bit will display "📶" , otherwise, "♥" will appear.

Untitled_0 *

File Edit Connection View Window Help

New Open Save Connect Disconnect Clear Data Options View Hex Help

```
value:151
value:161
value:166
value:170
value:173
value:177
value:184
value:190
value:194
value:202
value:209
value:215
value:221
value:228
value:229
value:234
value:238
value:243
value:245
value:248
```

COM16 / 115200 8-N-1
Connected 00:24:52

TX RTS DTR DCD
RX CTS DSR RI



Project 43: Water Level Alarm

Overview

In real life, when heavy rain occurs, the water level in a river or a reservoir will rise sharply. When reaching a certain water level, it is necessary to open a floodgate to solve the safety hazard. However, how to detect the water level in a river or a reservoir? Very simple, use a water level sensor.

So in this experiment, we are about to use a water sensor and a buzzer module to detect the water level in the glass, if beyond level, buzzer should make an alarm.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Water Sensor*1
- keyestudio Digital Buzzer Module*1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6


Component Introduction

Keyestudio Water Level Sensor:




The water sensor is easy- to-use, portable and cost-effective, designed to identify and detect water level and water drop. This smaller sensor can measure the volume of water drop or water quantity through an array of traces of exposed parallel lines.

Connection Diagram

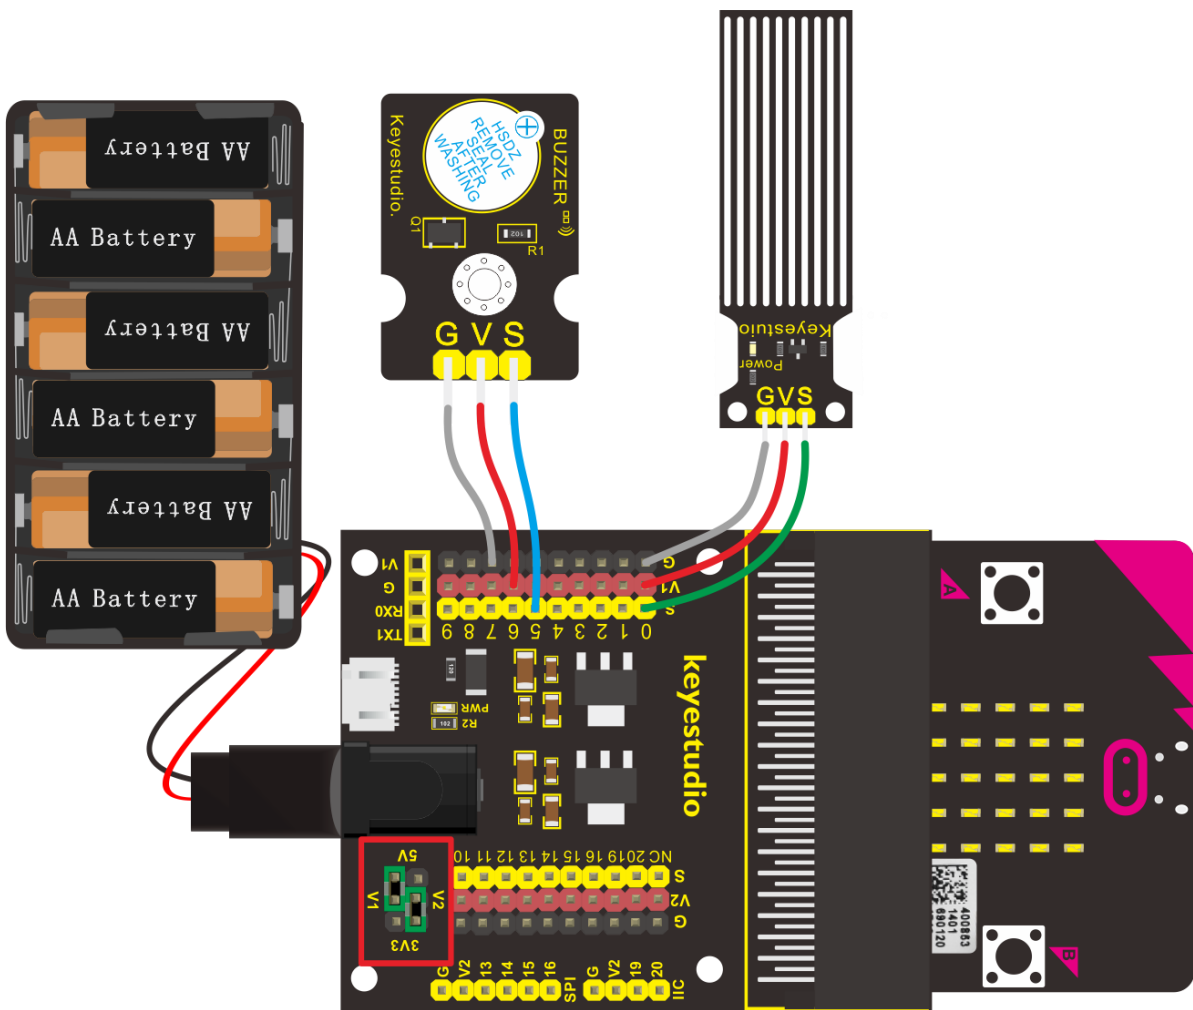




Test Code

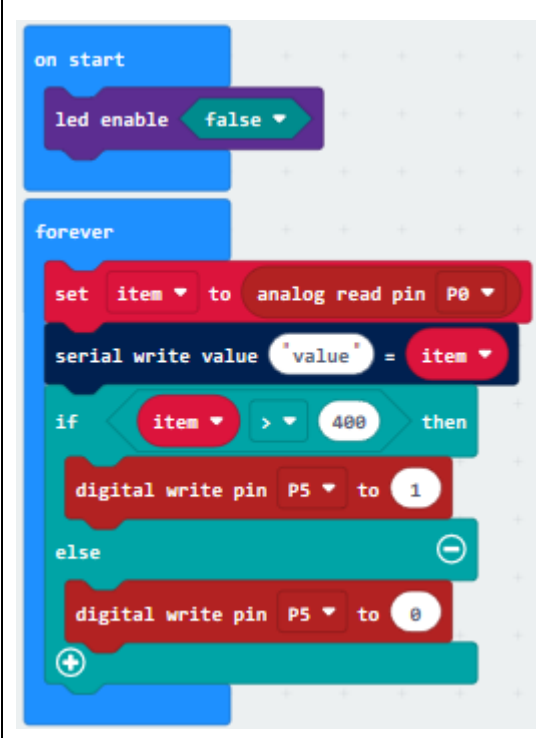	<p>"on start" : command block only runs once to start program.</p> <p>Turn off LED dot matrix on micro:bit</p> <p>The program under the block "forever" runs cyclically.</p> <p>Set item to the analog signal read by water level sensor</p> <p>Serial writes value=the analog signal read by water level sensor</p> <p>Serial writes value=the analog signal read by water level sensor</p> <p>When the analog signal exceeds 400, the program under then block will be executed</p> <p>Set P5 to high level(1) to make active buzzer emit sound.</p> <p>When the analog signal read by P0 is less than or equal to 400, the program under else block will be executed.</p> <p>Set P5 to low level(0) to turn off active buzzer</p>
--	--

Test Results

Wire components up, plug in external power and transfer code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

The deeper the water level sensor is soaked in the water, the larger the analog value is; on the contrary, the analog value gets smaller. When the analog value is more than 400, the active buzzer sounds, otherwise, it doesn't emit sound.

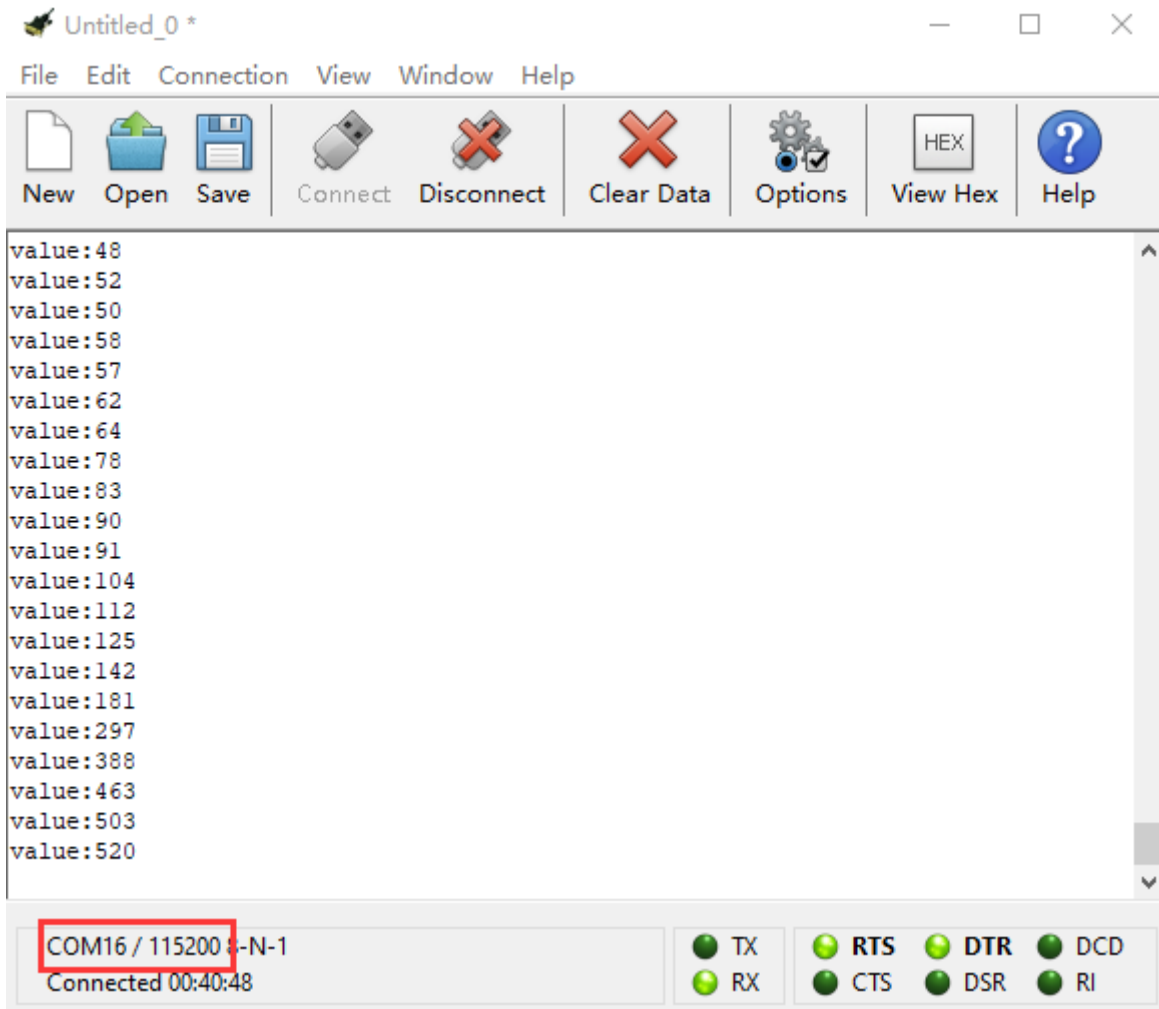

Project 44: Ultraviolet Detection

Overview

In this project, you will learn how to use Ultraviolet sensor and micro:bit to detect the ultraviolet light. Show the analog value on the micro:bit LED matrix and CoolTerm serial monitor.

Component Required:

- Micro:bit main board*1



- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio GUVA-S12SD 3528 Ultraviolet Sensor*1
- Dupont jumper wire*3
- Premium 6-Slot AA Battery Holder*1
- 1.5V AA Battery*6

Component Introduction

Keyestudio GUVA-S12SD Ultraviolet Sensor:

This sensor mainly includes GUVA-S12SD, applied to measure ultraviolet index of intelligent wearable device, such as watches, smart phone and outdoor device with UV index.

In the aspect of disinfection by ultraviolet rays, it can be used to monitor the intensity of ultraviolet light or used as a UV flame detector.

Connection Diagram



```
on start
  clear screen

forever
  show number analog read pin P0
  pause (ms) 100
  serial write value 'value' = analog read pin P0
```

“on start” : command block only runs once to start program.

Micro:bit clears the screen

The program under the block “forever” runs cyclically.

micro:bit shows the analog signal read by ultraviolet sensor

Delay in 100ms

Serial writes value=the analog signal read by ultraviolet sensor

Test Results

Wire up components , plug in external power and upload code to micro:bit, open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.


The CoolTerm serial monitor shows the analog signal read by ultraviolet sensor.

The greater the Ultraviolet light, the greater the value.

You should see the value is showed on the LED matrix of micro:bit. Or you



can open the serial monitor of CoolTerm to get the value like this:

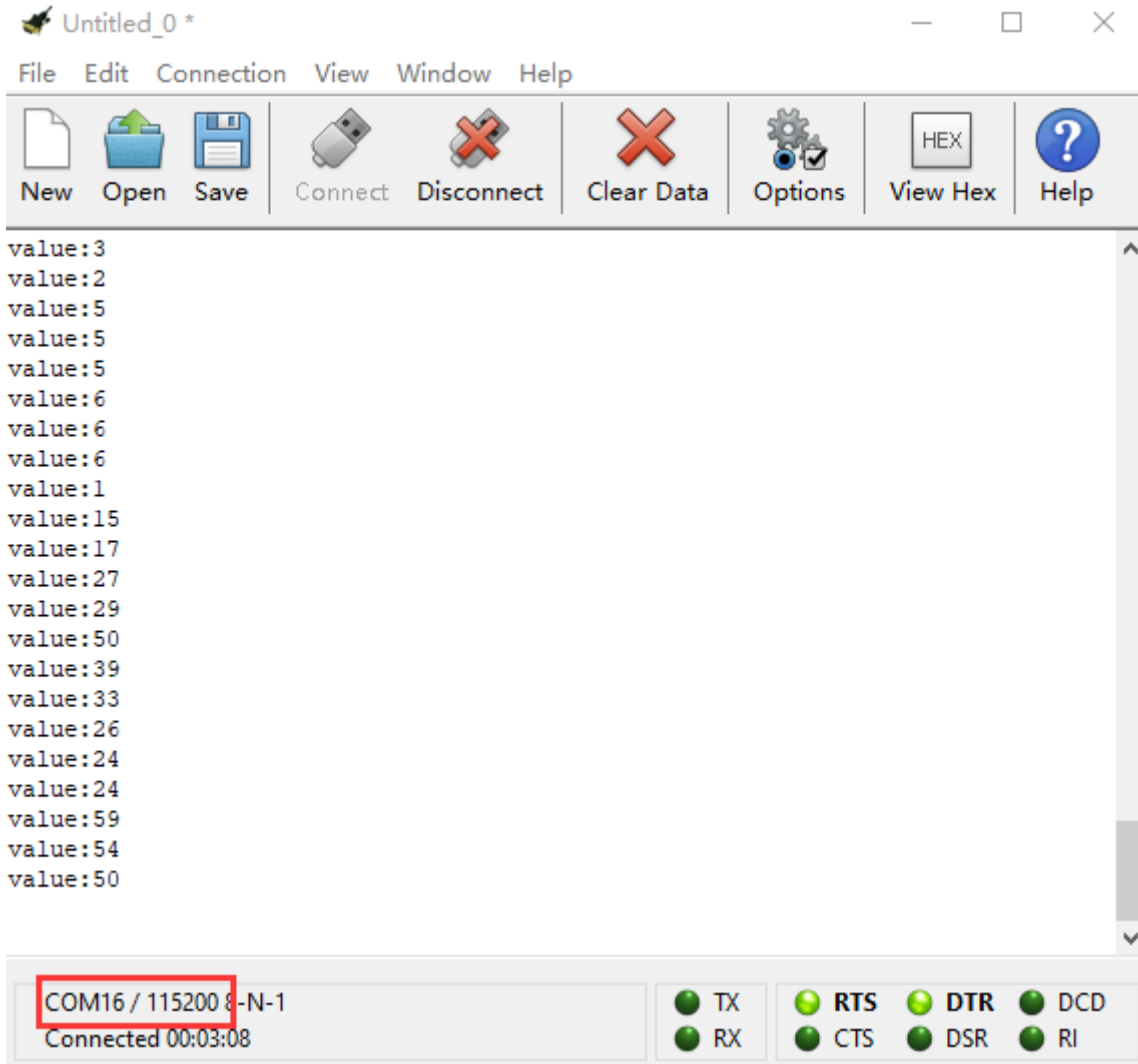

Project 45: Vapor in the Air

Overview

Our lives are surrounded by air everywhere. The air contains many ingredients, some of which are useful, some are harmful, some of which have a significant impact on the human body, and some of which have a slight effect on the human body.



So in this lesson, you will learn how to use a steam sensor and micro:bit to detect the vapor content in the air. Show the analog value on the micro:bit LED matrix or on the serial monitor.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Steam Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction


Keyestudio Steam Sensor:

Steam sensor is an analog sensor, which can be used as a simple rainwater detector or liquid level switch.

When moisture on the sensing area of this sensor rises, output voltage of its signal end will increase.



Connection Diagram

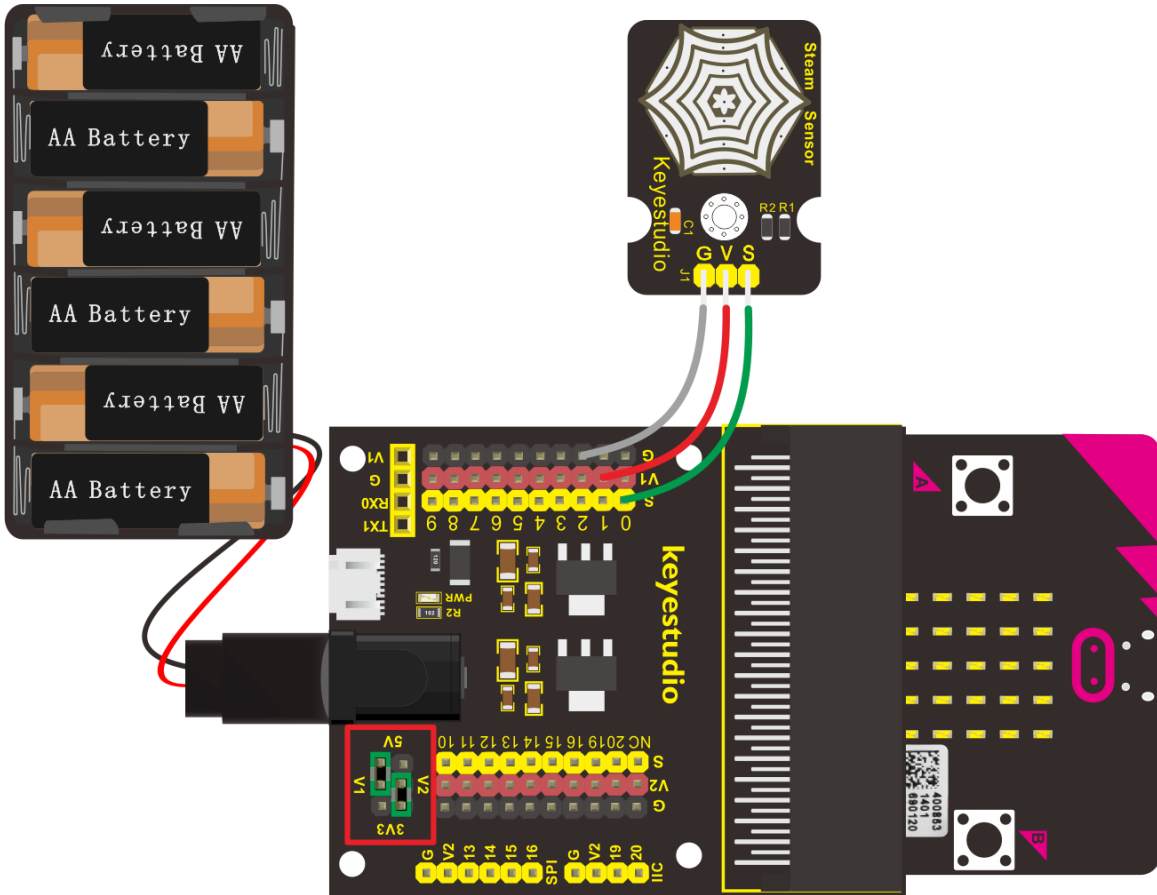



Test Code

```
on start
  clear screen

forever
  show number analog read pin P0
  pause (ms) 100
  serial write value "value" = analog read pin P0
```

“on start” : command block only runs once to start program.

micro:bit clears the screen

The program under the block “forever” runs cyclically.

Micro:bit displays the analog signal read by steam sensor

Delay in 100ms

Serial writes value=the analog signal read by steam sensor


Test Results

Wire up, plug in external power and upload code to micro:bit, Open CoolTerm, click Options and select SerialPort, set COM port and baud



rate(115200). Click OK and Connect. The CoolTerm serial monitor shows the analog signal read by steam sensor. The higher the vapor content in the air, the greater the value.

You should see the value is showed on the LED matrix of micro:bit. Or you can open the serial monitor of CoolTerm to get the value as the figure shown below.

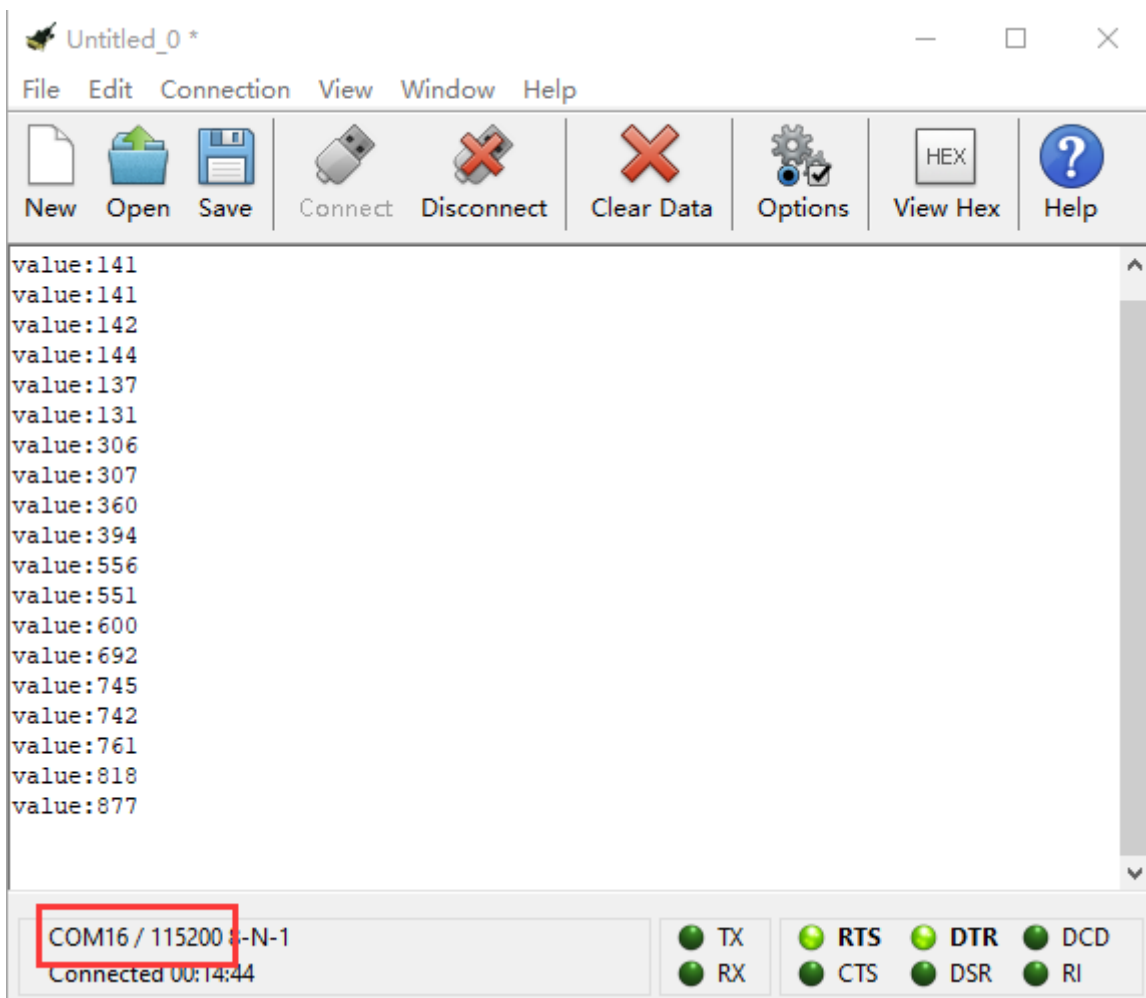



Project 46: Pressure Detection

Overview

In the previous projects, you have learned various external information detected by different sensors, such as temperature, light, sound, gas, and so on. Now, let' s use the keyestudio thin-film pressure sensor and micro:bit to detect external stress. Show the analog value of pressure on the micro:bit LED matrix or on the serial monitor.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Thin-film Pressure Sensor*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

Thin-film Pressure Sensor:

This sensor adopts the flexible nano pressure-sensitive material with an ultra-thin film pad. It is water-proof and pressure-sensitive.

When the sensor detects the outside pressure, the resistance of sensor



```
on start
  clear screen

forever
  show number analog read pin P0
  pause (ms) 100
  serial write value "value" = analog read pin P0
```

“on start” : command block only runs once to start program.

micro:bit clears the screen

The program under the block “forever” runs cyclically.

micro:bit displays the analog signal read by thin-film pressure sensor

Delay in 100ms


Serial writes value= analog signal read by thin-film pressure sensor

Test Results

Wire up components , plug in external power and upload code to micro:bit, open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.



The stronger the pressure is on the thin film, the larger the analog value is, as shown on CoolTerm monitor:

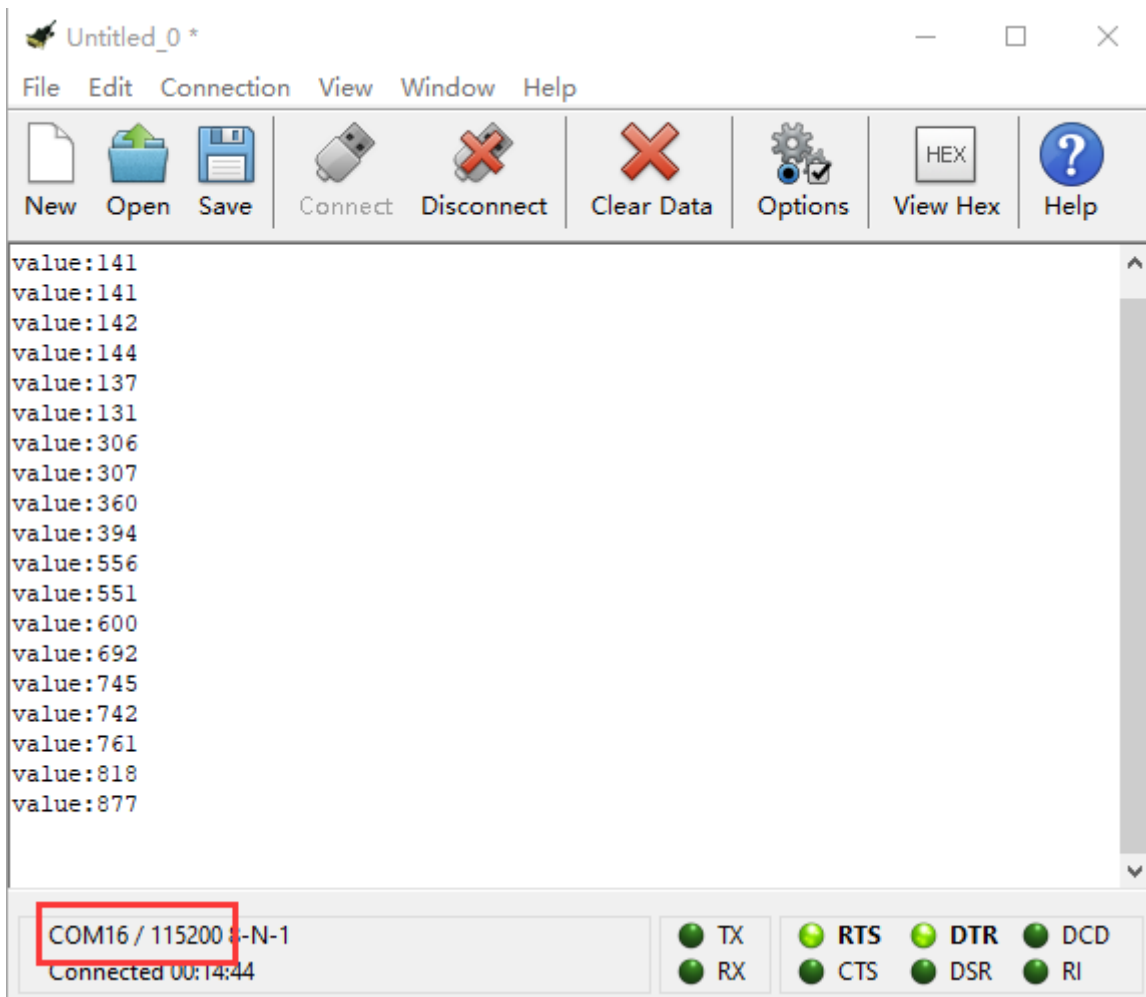

Project 47: Light Controlled By Vibration

Overview

In this project, you will learn how to use a vibration sensor and micro:bit to




control an LED on and off.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- Keyestudio Vibration Sensor*1
- Keyestudio Piranha LED Module*1
- Dupont jumper wire*6
- Premium 6-Slot AA Battery Holder *1
- 1.5V AA Battery*6

Connection Diagram

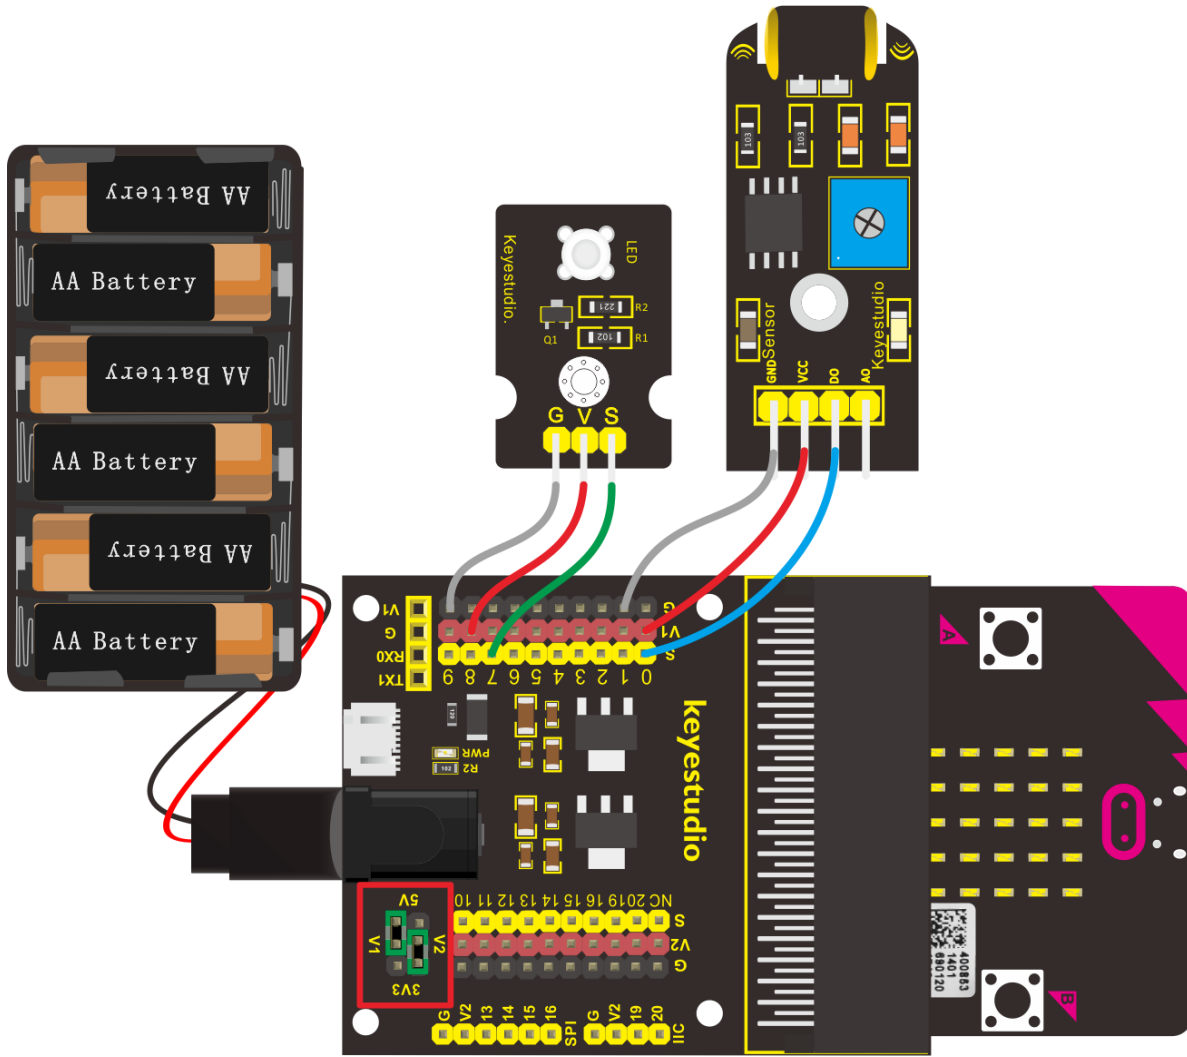

Test Code

```
on start
  led enable false

forever
  if digital read pin P0 = 1 then
    digital write pin P7 to 1
  else
    digital write pin P7 to 0
```

“on start” : command block only runs once to start program.
Turn off LED dot matrix on micro:bit
The program under the block “forever” runs cyclically.
When the digital signal read by P0 is 1, the program under then block will be executed.
Set P7 to high level(1) to light on white LED
When the digital signal read by P0 is 0, the program under else block will be executed.
Set P7 to low level(0) to turn off LED.



Test Results

Done wiring and powered up, send the above code to micro:bit.

By reading the High/Low level changes of P0 pin to control an LED state.

If you slap the table where the sensor locates, when the vibration sensor detects the vibration signal, an LED on the Piranha LED module will lights up, otherwise, LED off.

Project 48: Joystick

Overview

For some DIY projects, you perhaps use a component, that is, joystick module, such as game joysticks. How could they operate?

In this lesson, you will learn how to control a joystick module and micro:bit shield to display the data on serial monitor.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Joystick Module*1
- Dupont jumper wire*5
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6



Test Code

```
on start
  led enable false

forever
  set X to analog read pin P1
  set Y to analog read pin P0
  set B to digital read pin P2

  serial write value "X" = X
  serial write value "Y" = Y
  serial write value "B" = B

  pause (ms) 100
```



“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block “forever” runs cyclically.

Set the analog signal

Set X= P1 reads the digital signal of X axis

Set Y=P0 reads the digital signal of Y axis

Set B=P2 reads the digital signal of Z axis

Serial prints value X=Set X= P1 reads the digital signal of X axis

Serial prints value Y=P0 reads the digital signal of Y axis

Serial prints value B= P2 reads the digital signal of Z axis


Delay in 100ms

Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit. Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.



If you operate the joystick, the analog value on X, Y and Z will change, as well as pin B, as shown below:

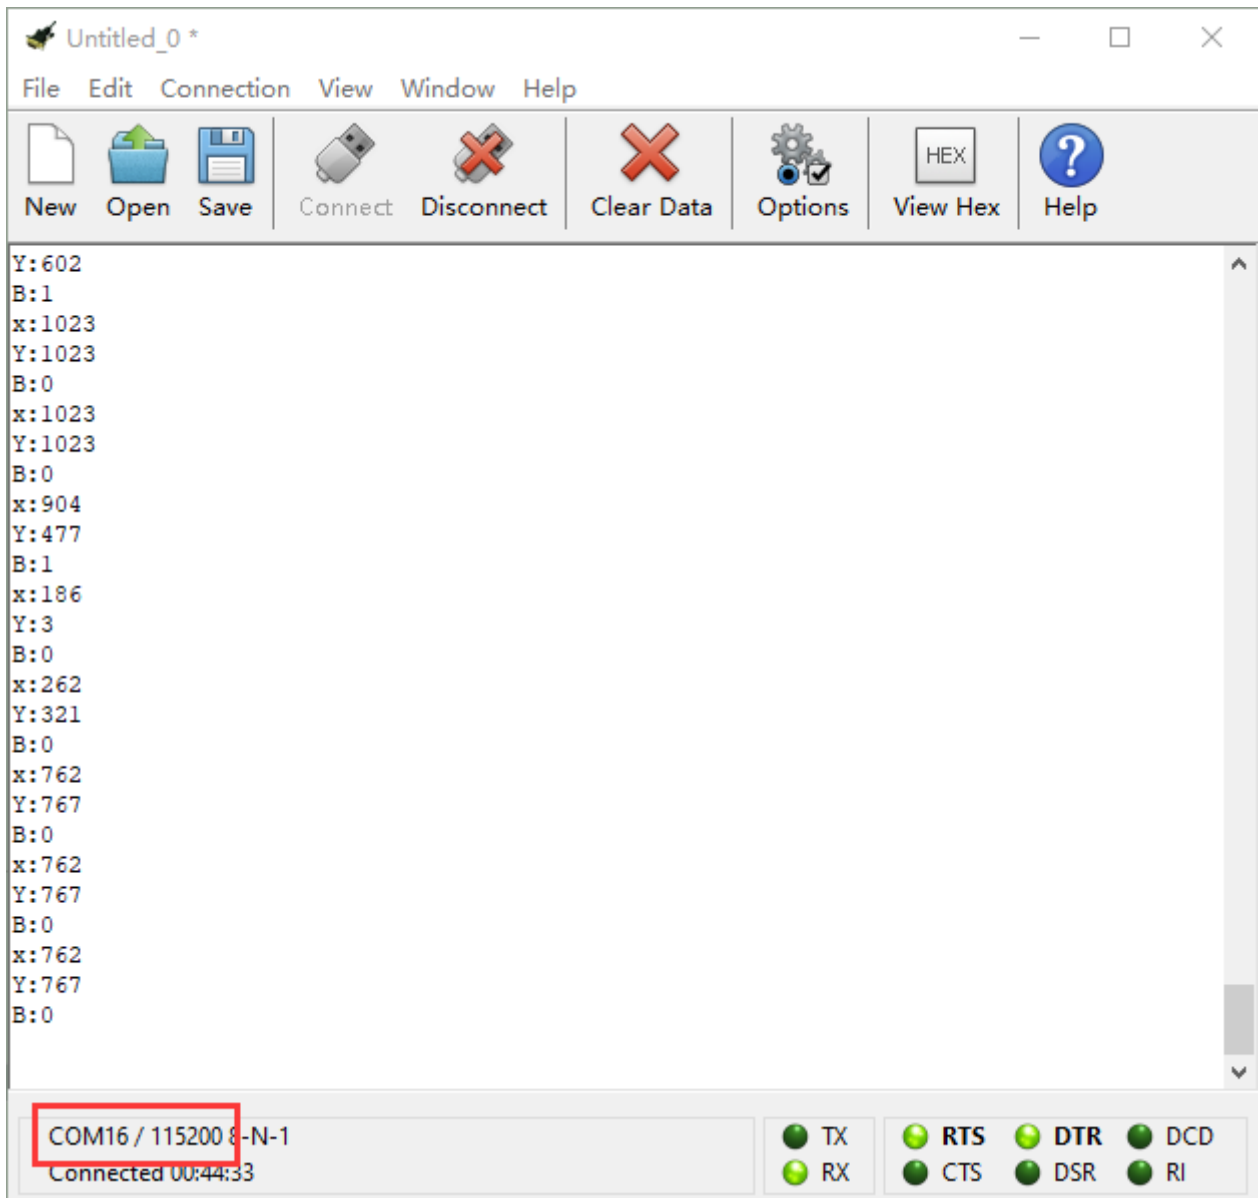

Project 49: Micro Servo

Overview

For those DIY smart cars, they often have a function of automatic obstacle



avoidance. In the DIY process, we need a servo to control the ultrasonic module to rotate left and right, and then to detect the distance between car and obstacles, so as to control the car to avoid obstacles.

If use other microcontrollers to control the rotation of servo, we need to set a pulse of a certain frequency and a certain width in order to control the servo angle.

But if use the micro bit main board to control the servo angle, we only need to set the control angle in the development environment. The corresponding pulse will be automatically set in the development environment to control the servo rotation.

In this project, you will learn how to control the micro servo rotate back and forth between 0° and 90°.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio Micro Servo*1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6




Component Introduction


keyestudio Micro Servo:

The servo has three interfaces, distinguished by brown, red and orange line (different brand may have different color). Brown line is for GND, red one for power 5V, orange one for signal terminal (PWM signal).

The rotation angle of servo is controlled by regulating the duty cycle of the PWM(Pulse-Width Modulation) signal. The standard cycle of the PWM signal is fixed at 20ms (50 Hz), and the pulse width is distributed between 1ms-1.5ms. The pulse width corresponds to the rotation angle (0° ~ 90°).

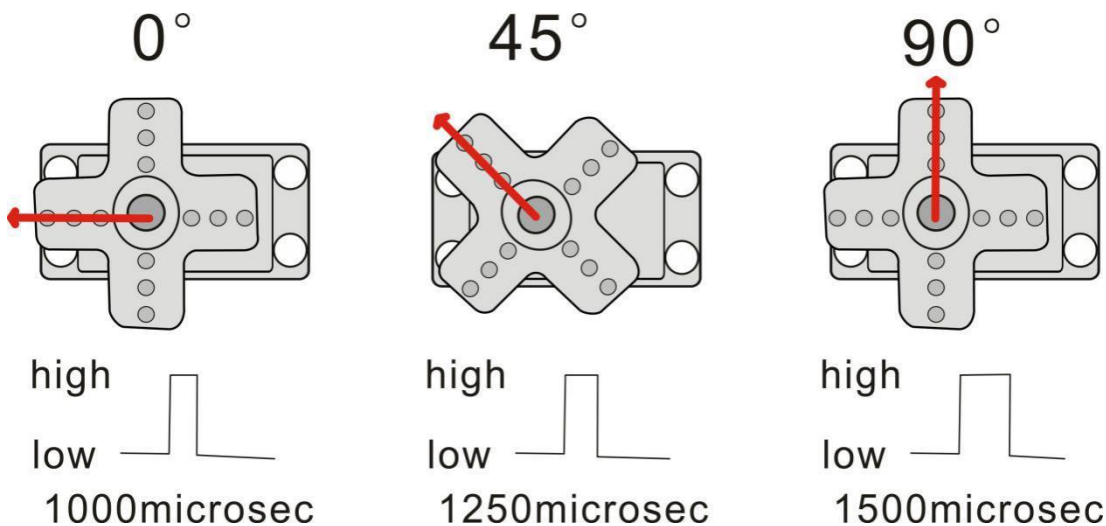

Connection Diagram

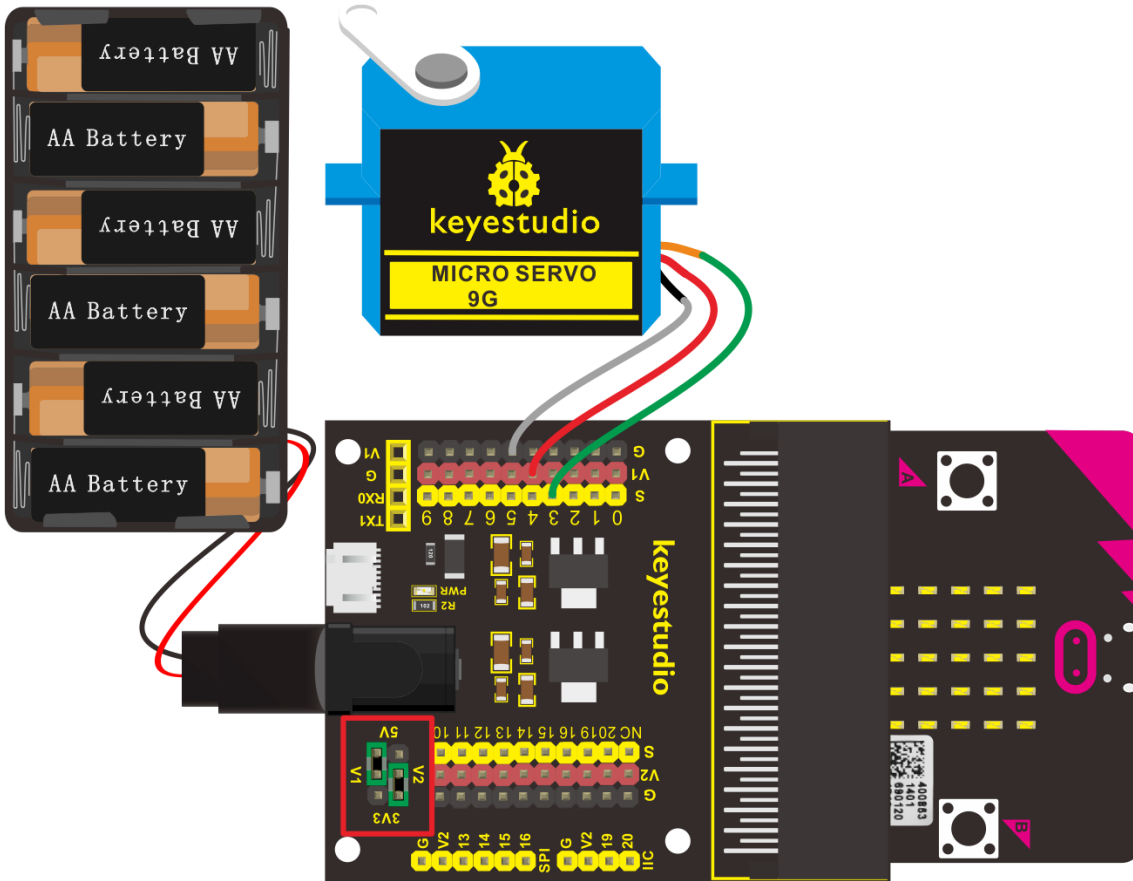

Test Code



```
on start
  led enable false
  servo write pin P3 to 0
  pause (ms) 100

forever
  servo write pin P3 to 0
  pause (ms) 1000
  servo write pin P3 to 180
  pause (ms) 1000
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

Rotate servo P3 to 0°

Delay in 100ms

The program under the block “forever” runs cyclically.

Rotate P3 to 0°

Delay in 1000ms

Set P3 to 180°

Delay in 1000ms



Test Results

Done wiring and plug in external power, send the above code to micro:bit. You should see the servo turn back and forth between 0° and 180°.

Project 50: Add 1602 LCD Display

Overview

In life, we can use the display and other sensors to do a variety of experiments. You can DIY a variety of small items. For example, use a temperature module and display to make a temperature tester, or use an ultrasound module and display to make a distance tester.

In the following, we will use keyestudio 1602 I2C module as the display, connect it to I2C pin headers of micro:bit shield. You will learn how to control the 1602 LCD show the character “keyestudio” and number.

Component Required:

- Micro:bit main board*1
- Keyestudio Micro bit Sensor V2 Shield*1
- USB Cable*1
- keyestudio 1602 LCD I2C Module*1
- Dupont jumper wire*3




- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Component Introduction

keyestudio 1602 I2C Module:

This module is a LCD 16x2 display, useful for creating standalone projects.

Connection Diagram

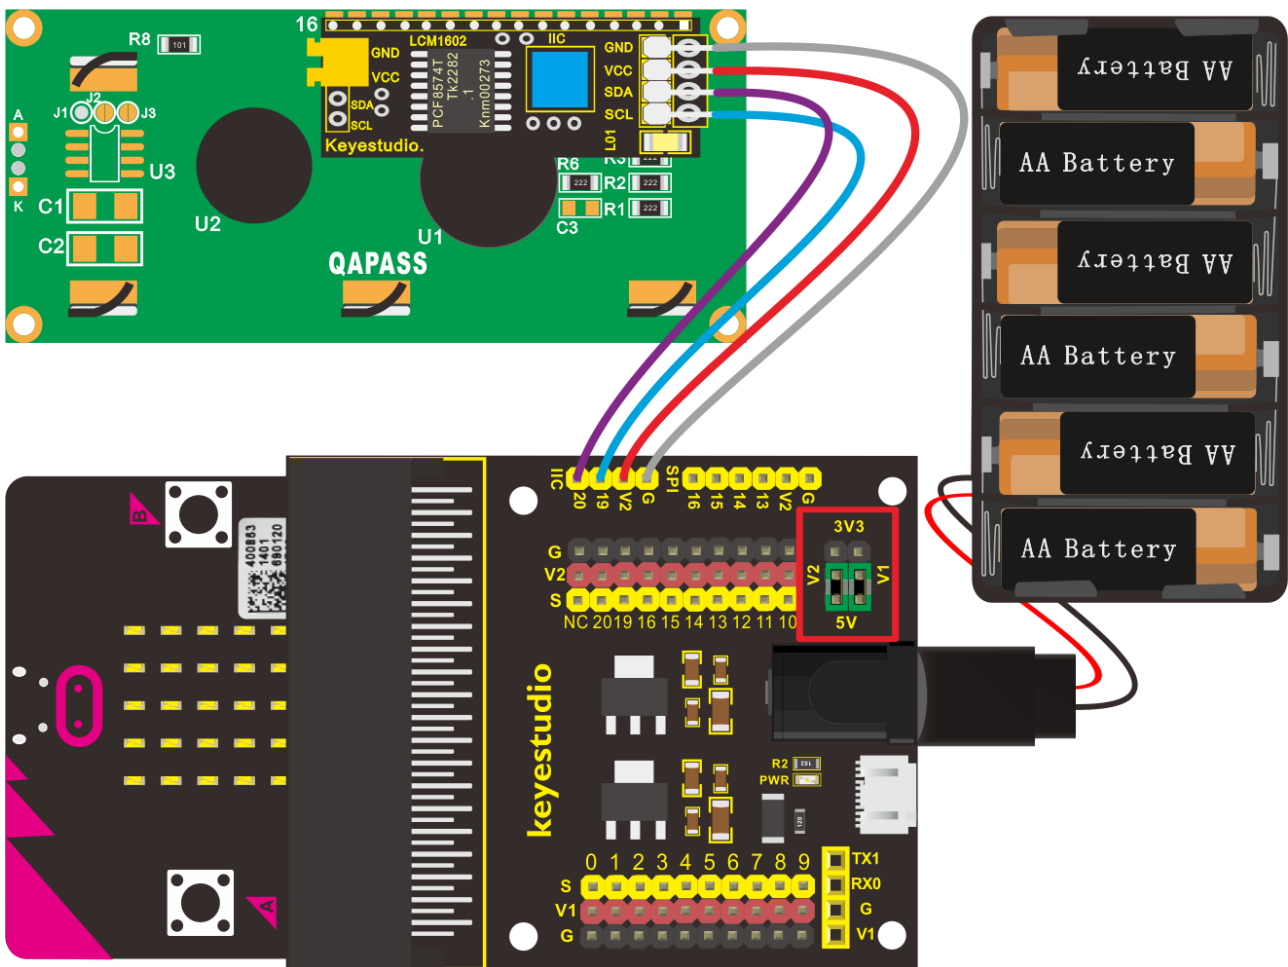





Test Code

Set test code with library file

Add the library file in the following block

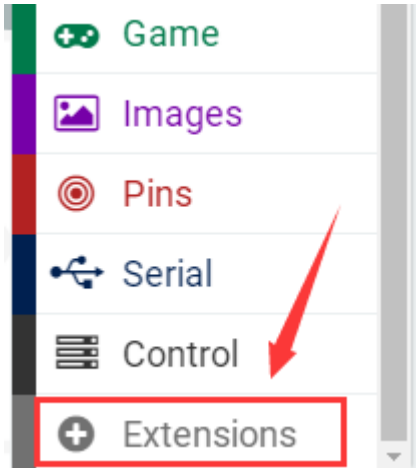


Library file link: https://github.com/xuefengedu/pxt-lcd1602_CN

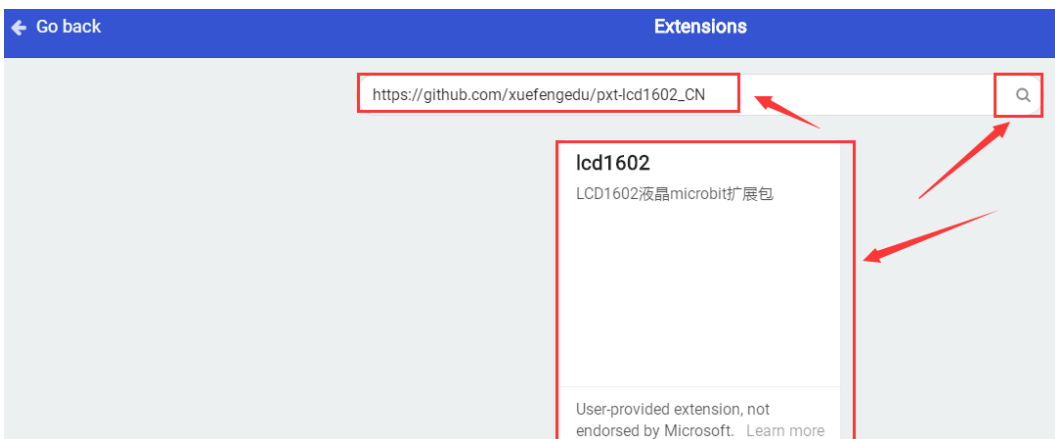

The file is downloaded automatically, then you could check the corresponding block in the edit code column



Search... 

- Basic
- Input
- Music
- Led
- Radio
- Loops
- Logic
- Variables
- Math
- LCD1602液晶**
- Advanced
- Functions
- Arrays
- Text
- Game
- Images
- Pins
- Serial

LCD1602液晶

LCD1602 I2C address 0x27 ▾

Auto set LCD1602 I2C address

LCD1602 I2C address 0

LCD show string ""

on x: 0

y: 0

LCD show number 0

on x: 0

y: 0


set string visibled ▾

set LCD backlight on ▾

LCD clear

Shift Left

Shift Right

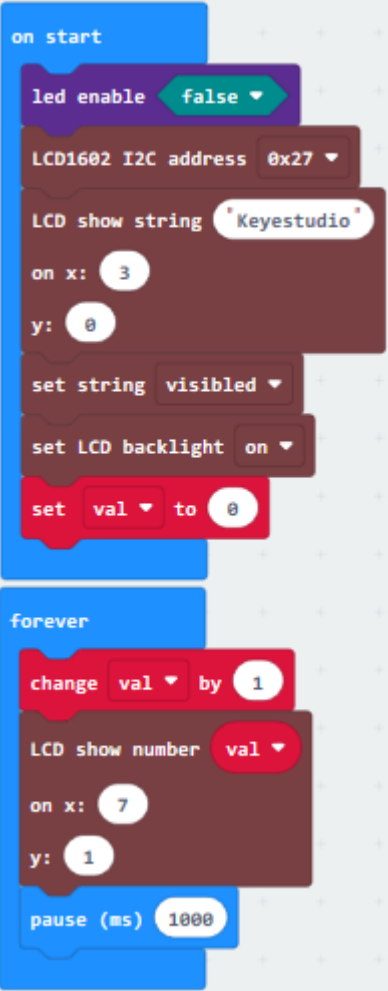

“on start” : command block only runs once to start program.

Turn off LED dot matrix

Set the address of LCD1602 I2C to 0x27

Start displaying Keyestudio at x:3 y:0

Set character string display

make the backlight of LCD stay on

Set val to 0

The program under the block “forever” runs cyclically. .

Change val by 1

Val is shown at x:7 y:1

Delay in 1000ms

Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit, the character "Keyestudio" is displayed on the first line, and the number is displayed on the second line. The number increases by 1 every second.



Project 51: Add OLED Display

Overview


In the previous lesson, the 1602 LCD can only display numbers and characters rather than patterns and Chinese. And the displayed characters can only be up to 32 characters. Here, we have particularly added an OLED liquid crystal module, which can perfectly solve these problems.

The OLED crystal module also uses I2C communication, and the connection diagram is similar to the 1602 LCD. DA interface is P20, and SCL interface is P19.


In this experiment, we link the OLED crystal module to the I2C communication interface on the expansion board. Upload the corresponding program, and after power on, the corresponding characters and patterns are displayed on the OLED screen.

Components Needed:

- micro: bit main board * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1
- OLED * 1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

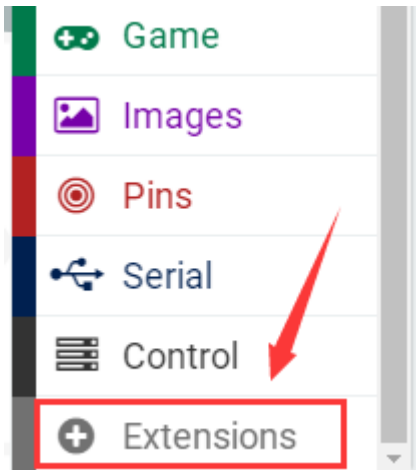

Search "OLED", as shown below, choose the first pattern, then automatically download and install library file.

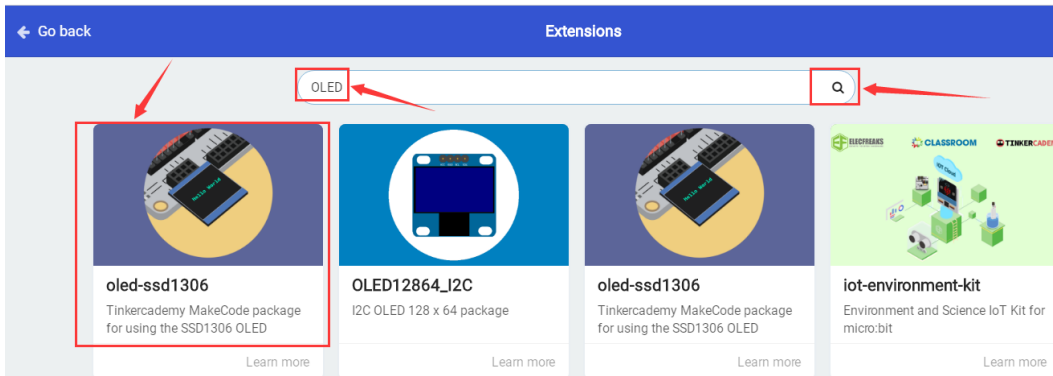

After installing successfully, the corresponding block will be shown in the edit code column.



Search... 🔍

- Basic
- Input
- Music
- Led
- OLED**
- Radio
- Loops
- Logic
- Variables
- Math
- Advanced
- Functions

OLED

```
initialize OLED with width 128 height 64  
show string ""  
show number 0  
show (without newline) string ""  
show (without newline) number 0  
insert newline  
clear OLED display
```



```
on start
  led enable false
  initialize OLED with width 128 height 64

forever
  repeat 4 times
  do
    show (without newline) string "ABCDEFGHJK"
    pause (ms) 500
    show string "LMNOPQRST"
    pause (ms) 500
    show (without newline) number 123456789
    pause (ms) 500
    show number 10111213
    pause (ms) 500
  clear OLED display
  draw rectangle from:
  x: 90
  y: 90
  to
  x: 20
  y: 20
  clear OLED display
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

Initialize OLED, width: 128, height: 64

The program under the block “forever” runs cyclically.

repeat 4 times

OLED shows the character string “ABCDEFGHJK”

Delay in 500ms

OLED shows character string “LMNOPQRST”

Delay in 500ms

OLED shows “123456789”

Delay in 500ms

OLED shows “10111213”

Delay in 500ms

Clear OLED display

Draw the square from

Draw a square from x:90 y:90 to x:20 y:20

Clear OLED display



Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit, the corresponding character and patterns are displayed on OLED.

Project 52: DHT11 Temperature And Humidity Sensor

Overview

This DHT11 temperature and humidity sensor is a composite sensor which contains a calibrated digital signal output of the temperature and humidity.

Its technology ensures high reliability and excellent long-term stability.

In this experiment, we connected the signal end of the DHT11 temperature and humidity sensor to P0 of the micro: bit motherboard, and read the relevant data and calculate the temperature and humidity value in the current environment using a specific formula. We will display the calculated value on the serial monitor.


Experiment

- micro: bit motherboard * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1
- DHT11 temperature and humidity sensor * 1



- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6


Connection Diagram

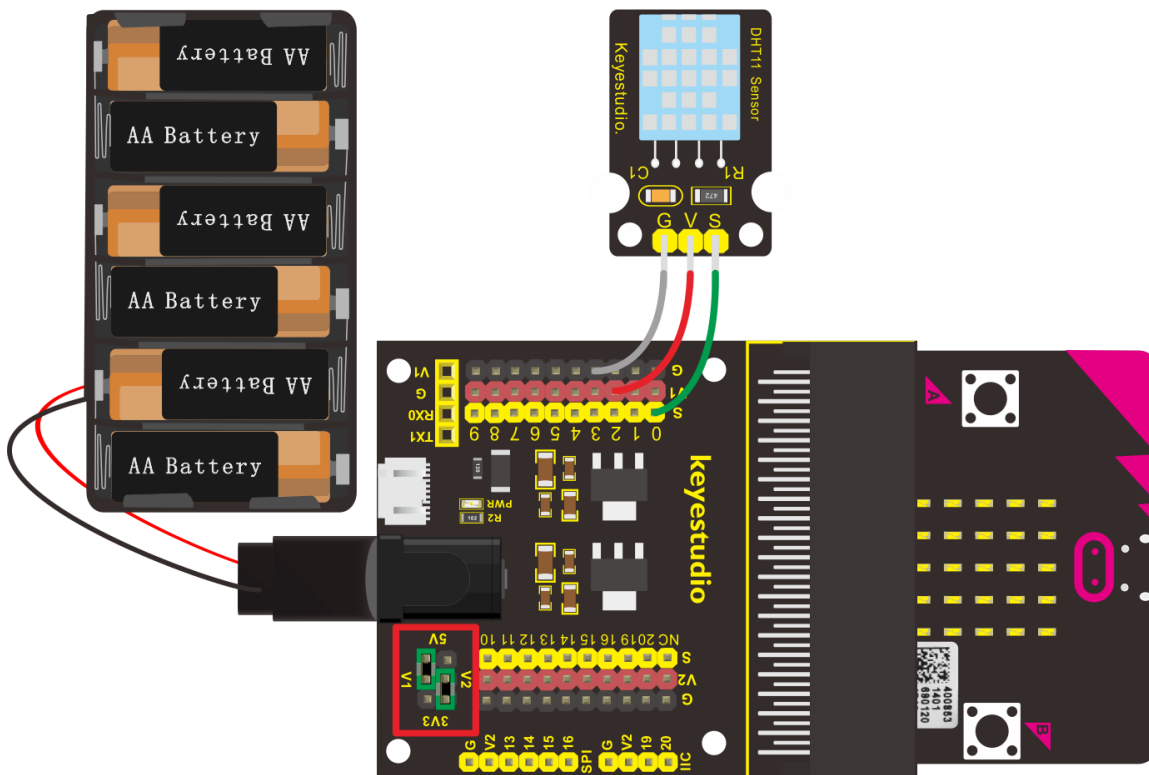


Test Code

Set test code with library file


Add library file in the following block

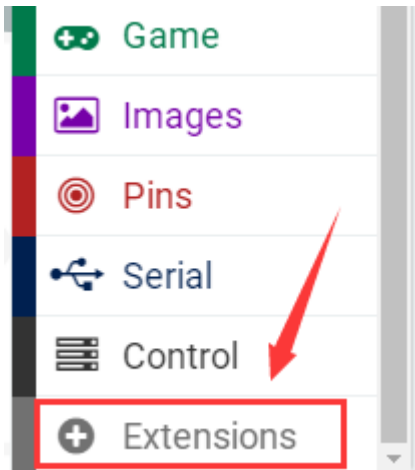

Search "DHT11" , as shown below, choose the first pattern, then automatically download and install library file.

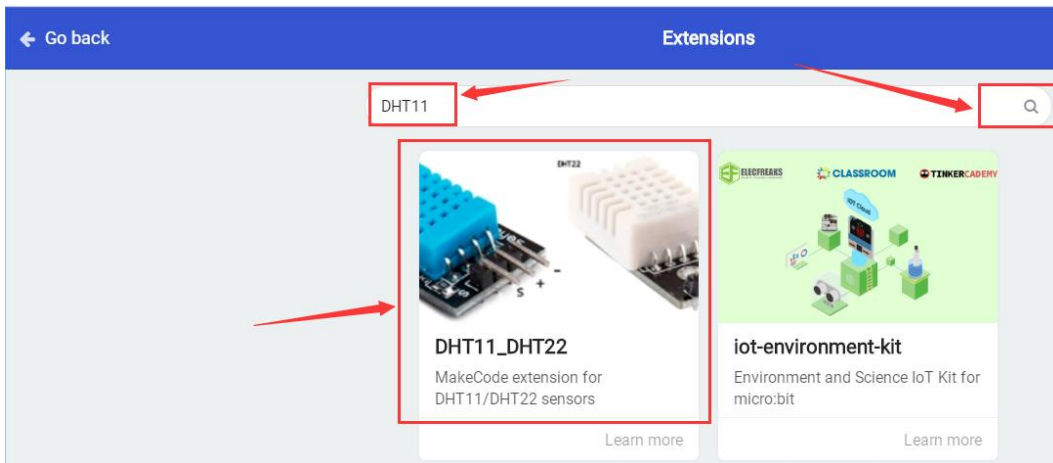

After installing successfully, the corresponding block will be shown in the edit code column.

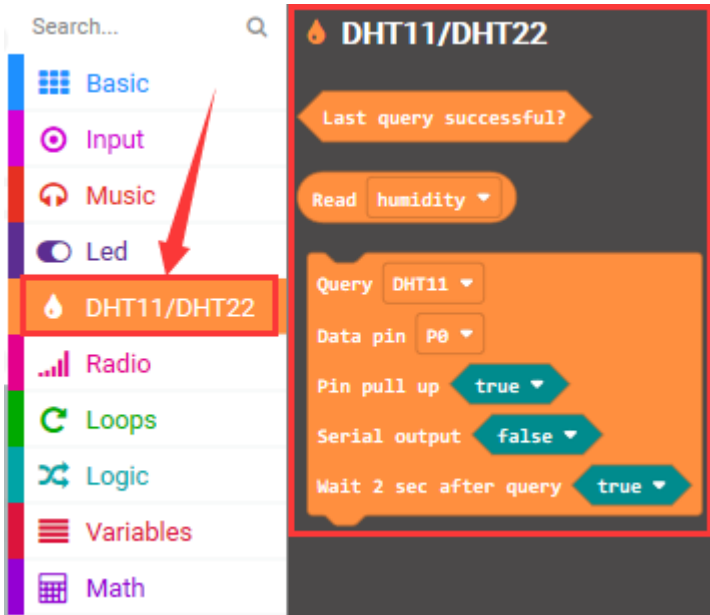


<p>The screenshot shows a program in the Keyestudio IDE. It starts with an 'on start' block containing an 'led enable' block set to 'false'. Below this is a 'forever' loop block. Inside the loop, there is a 'Query' block for 'DHT11' with 'Data pin' set to 'P0', 'Pin pull up' set to 'true', 'Serial output' set to 'false', and 'Wait 2 sec after query' set to 'true'. This is followed by two 'serial write value' blocks: one for 'humidity' = 'Read humidity' and one for 'temperature' = 'Read temperature'. The loop ends with a 'pause (ms)' block set to '500'.</p>	<p>"on start" : command block only runs once to start program.</p> <p>Turn off LED dot matrix on micro:bit</p> <p>The program under the block "forever" runs cyclically.</p> <p>Check data form P0 pin of DHT11 sensor Serial writes "humidity " =Read humidity humidity " =Read humidity Serial writes "temperature " =Read temperature</p> <p>Delay in 500ms</p>
--	--



Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit , Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

When DHT11 temperature and humidity sensor detects the temperature and humidity value, the results will be shown on CoolTerm monitor.

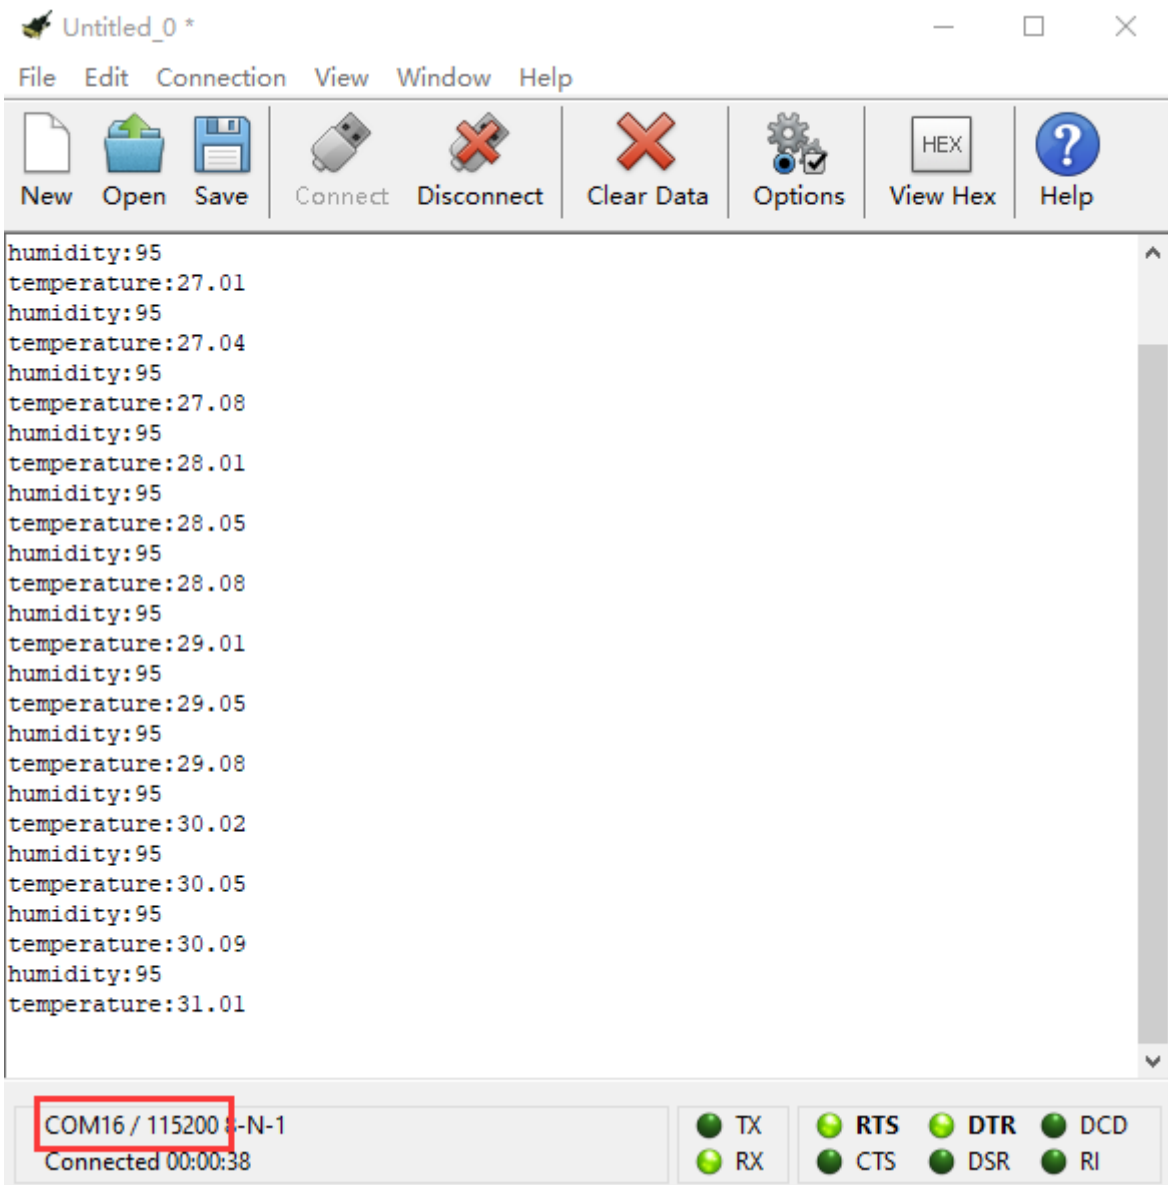



Project 53: IR Remote Control Decoding




Overview

There is no doubt that infrared remote control is commonly seen in our daily life. It's hard to imagine our world without it.

An infrared remote control can be used to control a wide range of home appliances such as television, audio, video recorders and satellite signal receivers.

Well, in the following let' s get a better understanding of the infrared remote control.

Infrared remote control is composed of infrared transmitting and infrared receiving systems. That is, consist of an infrared remote control, an infrared receiver module and a microcontroller that can decode. You can refer to the figure below.

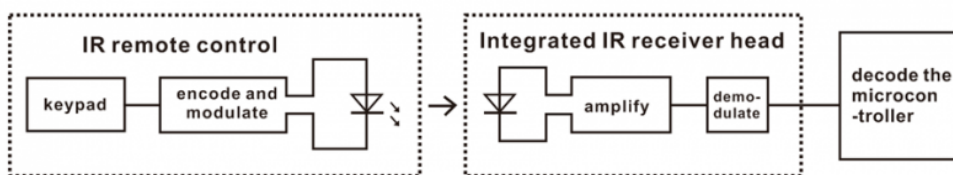

The 38K infrared carrier signal transmitted by an infrared remote controller is encoded by an encoding chip inside the remote controller. It is composed of a pilot code, user code, data code, and data inversion code.

The time interval between pulses is used to distinguish whether it is a



signal 0 or 1. (when the ratio of high level to low level is about 1:1, considered as signal 0.) And the encoding is just well composed of signal 0 and 1.

The user code of the same button on remote controller is unchanged. Using difference data distinguish the key pressed on the remote control.

When press down a button on the remote control, it will send out an infrared carrier signal. And when infrared receiver receives that signal, its program will decode the carrier signal, and through different data codes, thus can judge which key is pressed.


The microcontroller is decoded by an received signal 0 or 1 to determine which key is pressed by the remote control.

Components Needed:

- Micro: bit motherboard * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1
- Keyestudio Digital IR Receiver Module * 1
- Keyestudio infrared remote control * 1
- Dupont jumper wire*3
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6




Connection Diagram

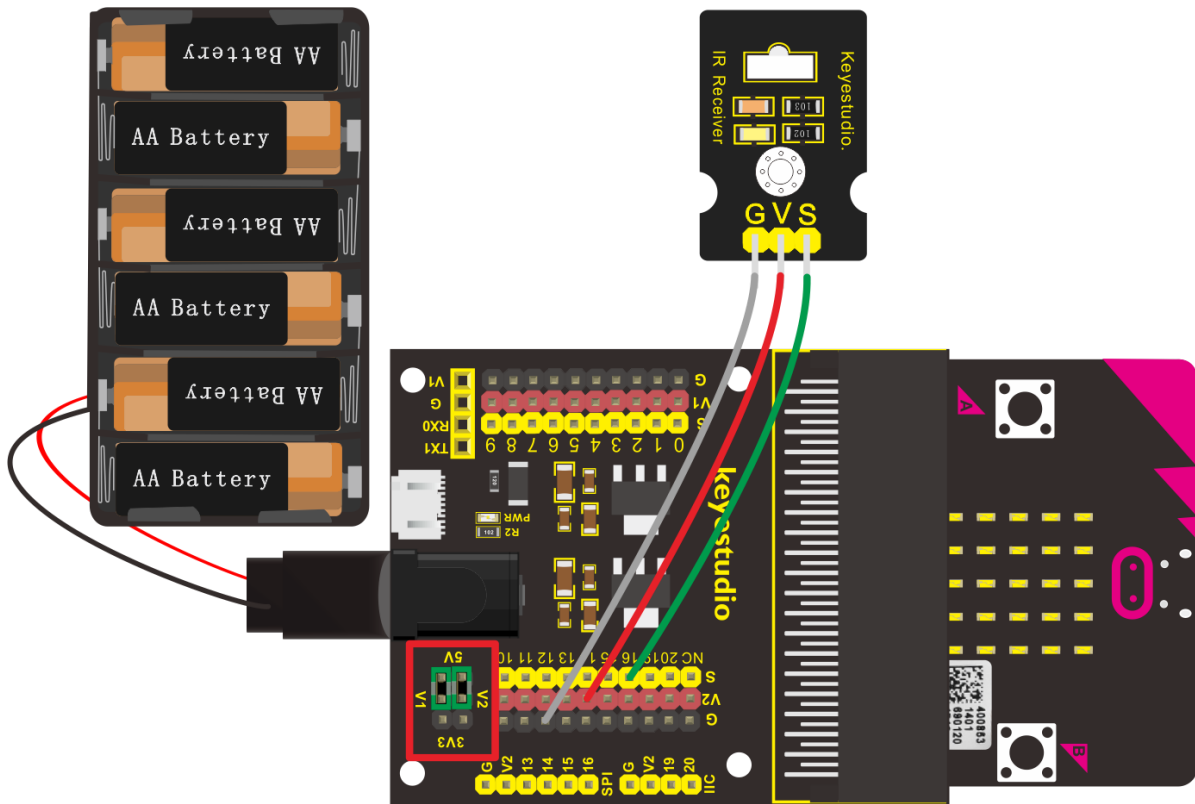

Test Code


Use the library file to set test code

Add the library file in the following block

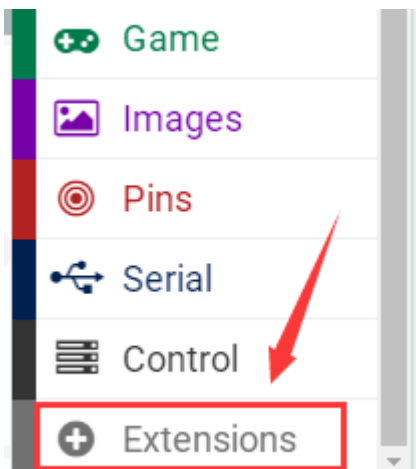




Enter this website <https://github.com/mworkfun/pxt-RI-receiver.git> to search

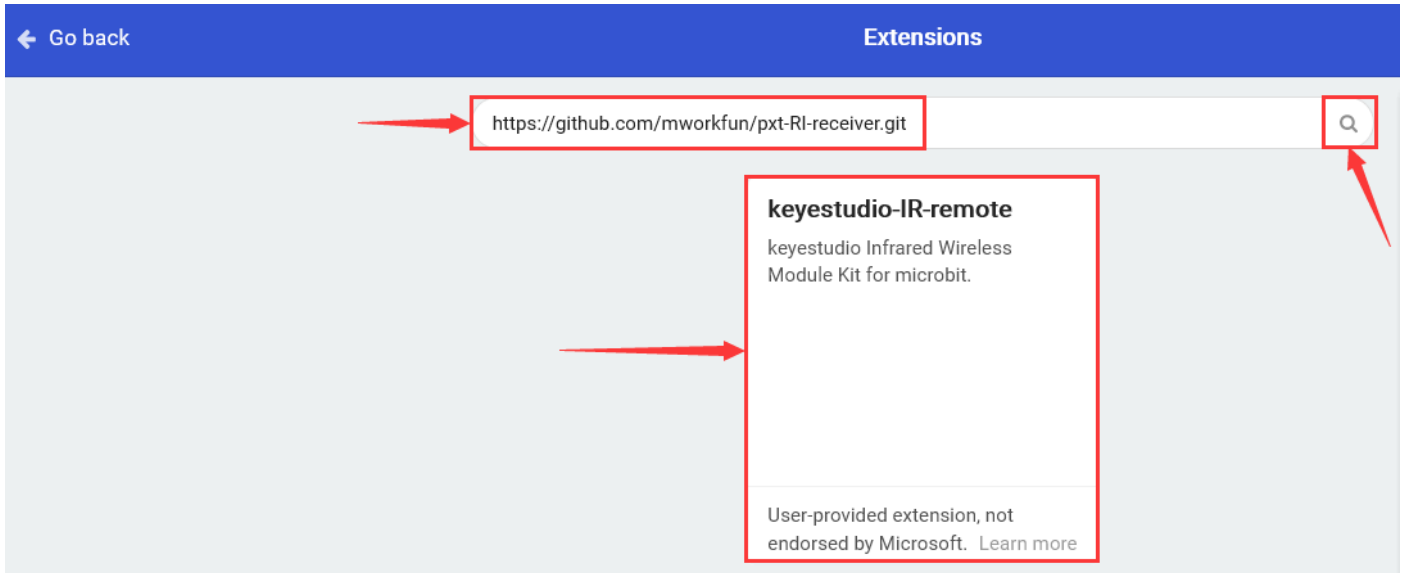

After installing successfully, the corresponding block is in the edit the edit code column.

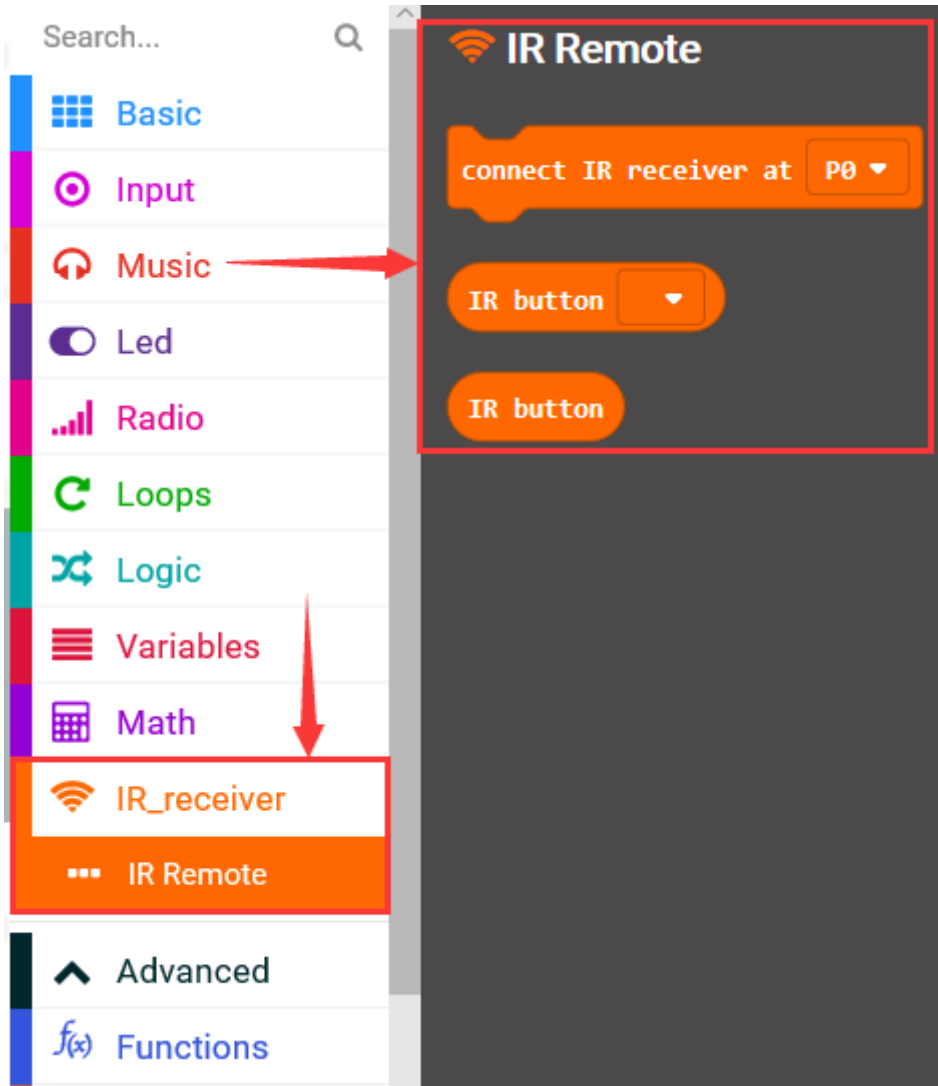

<pre> on start led enable false connect IR receiver at P16 forever set val to IR button serial write value "IR" = val pause (ms) 1000 </pre>	<p>"on start" : command block only runs once to start program.</p> <p>Turn off LED dot matrix on micro:bit</p> <p>Connect signal end of IR receiver to P16</p> <p>The program under the block "forever" runs cyclically.</p> <p>Set val=IR button</p> <p>Serial writes IR=val</p> <p>Delay in 1000ms</p>
--	--



Note:

Some infrared remote controls don't come with a battery and need to be configured by yourself. The battery model is CR2025.

Before testing, make sure that the infrared remote control is OK. There is a tip for you: open the camera of the mobile phone to point at the signal light of infrared remote control, then press the button of remote control. If you see a purple light flashing via the cellphone, which means that the IR remote control is OK.

Test Results

Code explanation: When the keys on IR remote are not pressed, CoolTerm monitor will refresh 0 ceaselessly; when pressed, the monitor will display the corresponding key values.


Wire up according to connection diagram. plug in external power and upload code to micro:bit, Open CoolTerm, click Options and select SerialPort, set COM port and baud rate(115200). Click OK and Connect.

Point IR remote control to IR receiver, press the button, and display the corresponding key value on serial monitor, as shown below:



The screenshot shows the Keyestudio software interface. At the top, there is a menu bar with 'File', 'Edit', 'Connection', 'View', 'Window', and 'Help'. Below the menu bar is a toolbar with icons for 'New', 'Open', 'Save', 'Connect', 'Disconnect', 'Clear Data', 'Options', 'View Hex', and 'Help'. The main area displays a list of IR codes, each preceded by 'IR:'. The codes are: 0, 0, 70, 0, 68, 21, 0, 0, 67, 0, 64, 0, 22, 25, 13, 0, 12, 0, 0, 24, 94, 8, 0, 28, 0, 90, 66, 0, 82, 74, 0, 0. At the bottom, there is a status bar showing 'COM16 / 115200 8-N-1' (highlighted with a red box) and 'Connected 00:04:47'. To the right of the status bar are several status indicators: TX, RX, RTS, CTS, DTR, DSR, DCD, and RI, each with a green dot.

Therefore, we mark the corresponding values of buttons on the remote control, as shown below.

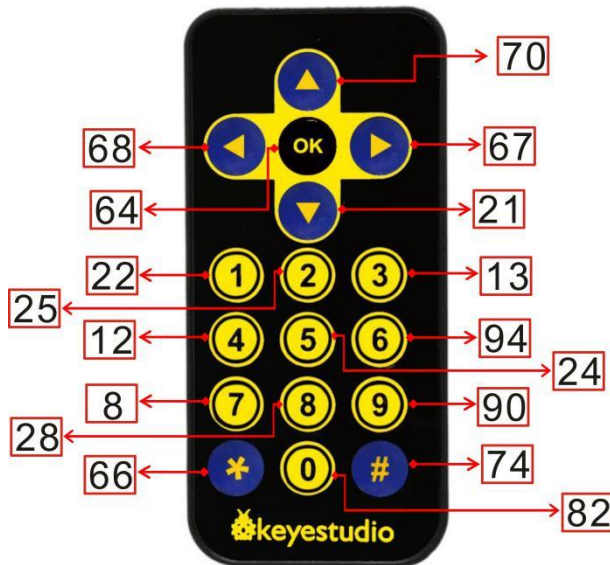

Project 54: IR Remote Control RGB

Overview

In the previous experiment, we used an infrared receiver module and a micro: bit control board to decode the infrared remote control. After decoding, we got the corresponding values of each key on infrared remote control. Thus, we can control other external sensors / modules based on these data. In this experiment, we add an SMD RGB module and control LED of RGB module to display the corresponding color by infrared remote.


Components Needed:

- Micro: bit motherboard * 1
- Keystudio Micro bit sensor V2 expansion board * 1
- USB cable * 1



- Keyestudio Digital IR Receiver Module * 1
- keyestudio RGB LED Module * 1
- Keyestudio infrared remote control * 1
- Dupont jumper wire*7
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

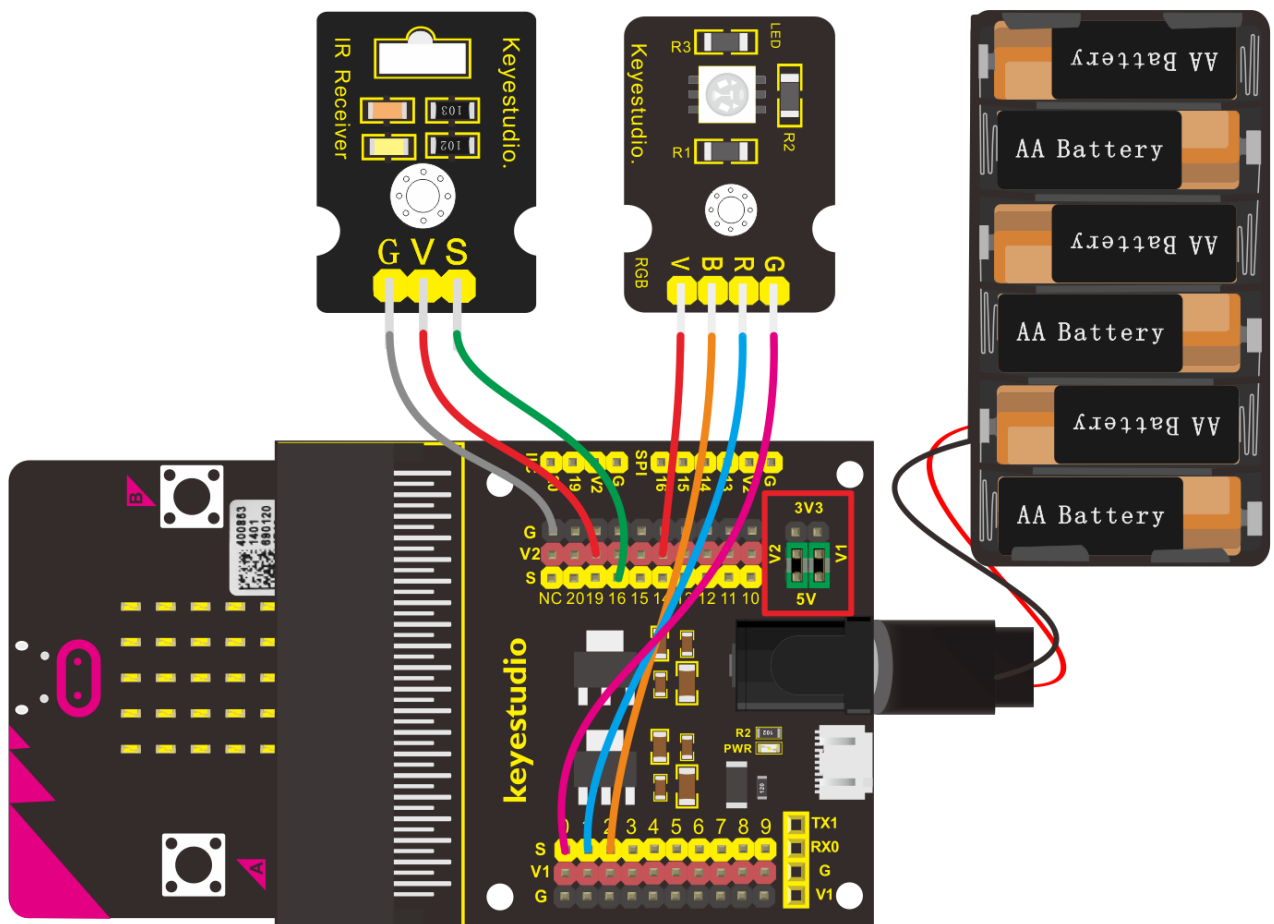

Test Code

Need to add library file, please refer to the previous lesson.



```
on start
  led enable false
  connect IR receiver at P16
  set val to 0
  set val2 to 0

function RGB LED red green blue
  analog write pin P1 to 1023 - red
  analog write pin P0 to 1023 - green
  analog write pin P2 to 1023 - blue

forever
  set val to IR button
  if val != 0 then
    set val2 to val
    if val2 = 70 then
      call RGB LED 1023 0 0
    else if val2 = 68 then
      call RGB LED 0 1023 0
    else if val2 = 67 then
      call RGB LED 0 0 1023
    else if val2 = 64 then
      call RGB LED 1023 0 1023
    else
      call RGB LED 1023 1023 1023
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

Connect IR receiver to P16

Set val to 0

Set val2 to 0

Subfunction RGB LED red green blue

Set the analog value of P1 to 1023-red

Set the analog value of P0 to 1023-green

Set the analog value of P2 to 1023-blue

The program under the block “forever” runs cyclically.

Set val to IR button

If val≠0, the program under then block will be executed

Set val2 to val

If val2=70, the program under then block will be executed

Call the subfunction RGB LED 1023 0 0 to turn on red LED

When val2=68, the program under then block will be executed

Call function RGB LED 0 1023 0 to turn on green LED

If val2=67, the program under then block will be executed

Call function RGB LED 0 0 1023 to turn on blue LED

When val2=64, the program under then block will be executed

Call function RGB LED 1023 0 1023 to turn on violet LED

If the above conditions are not met, the program under else will be executed.

Call function RGB LED 1023 1023 1023 to turn on white LED







Notes:

Some infrared remote controls don't come with a battery and need to be configured by yourself. The battery model is CR2025.

Before testing, make sure that the infrared remote control is OK. There is a tip for you: open the camera of the mobile phone to point at the signal light of infrared remote control, then press the button of remote control. If you see a purple light flashing via the cellphone, which means that the IR remote control is OK.

Test Results

Wire according to connection diagram, plug in external power and upload code to micro:bit, Point IR remote control at IR receiving head of expansion board, press the button. Press  button, LED of RGB displays red color; press  button, LED is green color; tap  button, LED shows blue color; press  button, LED is purple color; when the other buttons are pressed, LED is white.



Project 55: Fan Module


Overview

A Keyestudio L9110 fan module is included in the kit. Connect the INA INB interface of the fan module to the control terminal of the micro bit (with ANALOG IN function). We can control the direction and speed of the fan on the module by two interfaces. In the experiment, we control the fan on the module to rotate clockwise, stop, and counterclockwise.

Components Needed:

- micro: bit motherboard * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1
- Keyestudio L9110 fan module * 1
- Dupont jumper wire*4
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

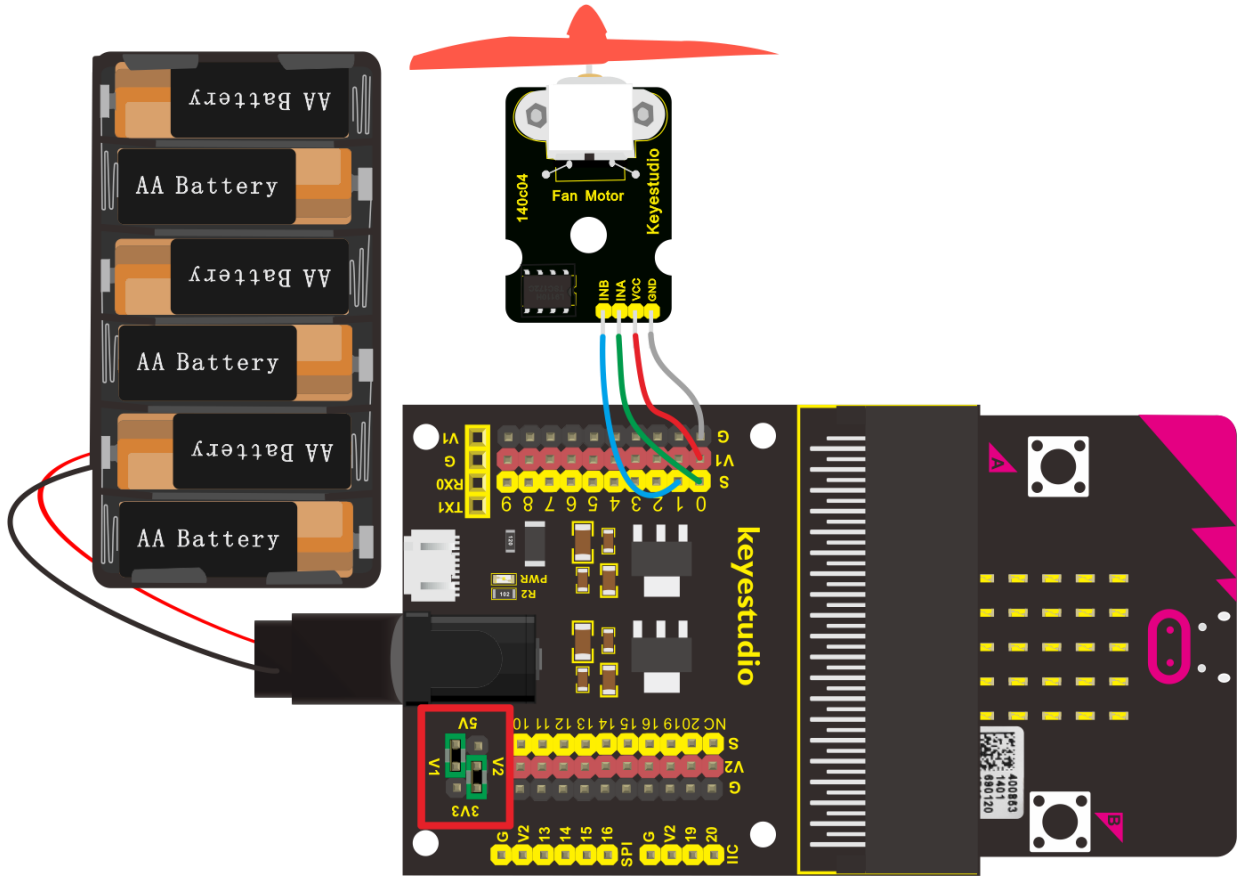

Test Code

```
on start
  led enable false

function forward speed1
  digital write pin P0 to 0
  analog write pin P1 to speed1

function reversal speed2
  digital write pin P1 to 0
  analog write pin P0 to speed2
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

Subfunction forward speed1


Set P0 to low level(0)

Set the analog value of P1 to speed1

Subfunction reversal speed2

Set P1 to low level(0)

Set the analog value of P0 to speed2

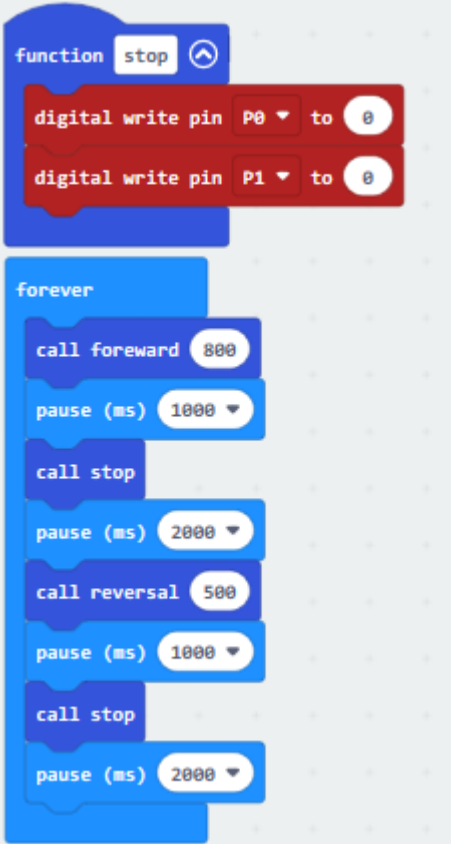

Subfunction stop
Set P0 to low level(00)
Set P1 to low level(00)
The program under the block "forever" runs cyclically.
Call subfunction forward and set to 800
Delay in 1000ms
Set subfunction stop , stop
delay in 2000ms
Call subfunction reversal and set to 500
delay in 1000ms
Set subfunction stop , stop
delay in 2000ms

Test Results

Wire according to connection diagram, plug in external power and upload code to micro:bit. The fan on the module rotates clockwise (relatively faster) for 1s; stops for 2s; rotates counterclockwise (relatively slower) for 1s, stops for 2s, and alternately.



Project 56: Knock Sensor

Overview


Sensors can be used to detect various common data in life, such as light, temperature, humidity, sound, vibration and so on. We can use sensors to sense external signals and then control other devices. Thus, we can do various interesting experiments.

In the experiment, we connect the knock sensor and the LED module to the micro bit control board. Control the external LED to turn on and off by knock sensor.

Components Needed:

- Micro: bit motherboard * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1
- Keyestudio Knock Sensor Module
- Keyestudio Digital White LED Module * 1
- Dupont jumper wire*6
- Premium Battery Holder 6-cell AA*1
- 1.5V AA Battery*6

Connection Diagram

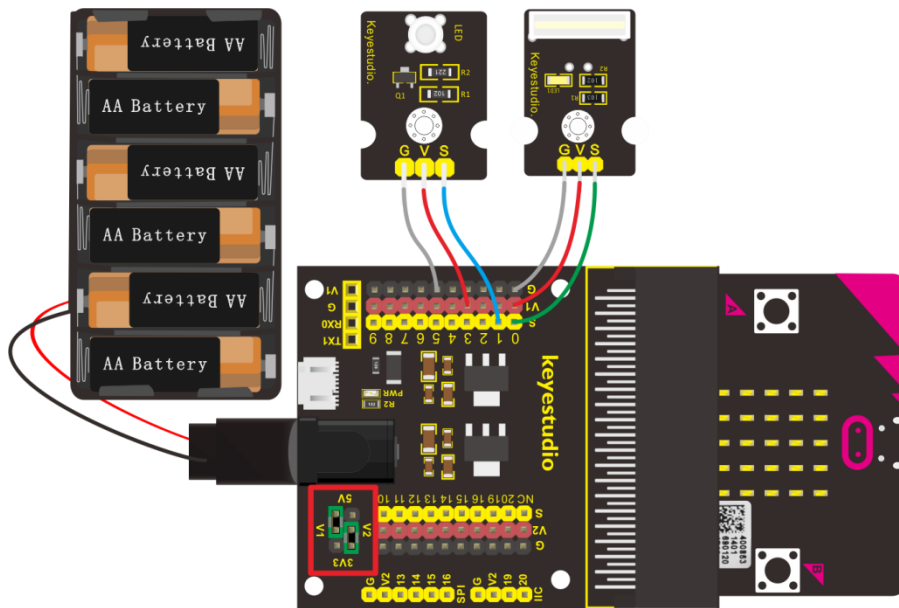

Test Code

```
on start
  led enable false

forever
  while true
  do
    if digital read pin P0 = 0 then
      digital write pin P1 to 1
      pause (ms) 500
    else
      digital write pin P1 to 0
```

“on start” : command block only runs once to start program.

Turn off LED dot matrix on micro:bit

The program under the block “forever” runs cyclically.

When it is true, the program under then block will be executed

If the digital signal of P0 is 0, the program under then block will be executed

If the digital signal of P0 is 0, that is

Set P1 to high level(1) to light up white LED

Delay in 500ms

When the digital signal of P0 is 1, the program under else will be executed.

Set P1 to low level(0) to turn off white LED



Test Results

Wire according to connection diagram, plug in external power and upload code to micro:bit, When the white sensor senses the knock signal, the LED on the external module lights up for 500ms, otherwise the LED turns off.

Project 57: Magic Light Cup Sensor

Overview

In this kit, there are two magic light cup sensors. Its the working principle is to adjust light by analog ports, so as to make two sensor change the brightness. The ball switch emits digital signals and triggers analog ports. Through the program, we can see the effect that two cups filled with light. In the experiment, we connect two magic light cup sensors to the micro bit expansion board, and achieve the effect with micro bit control board.

Components Needed:

- Micro: bit motherboard * 1
- Keyestudio Micro bit sensor V2 expansion board * 1
- USB cable * 1



```
on start
  led enable false
  set buttonStateA to 0
  set buttonStateB to 0
  set brightnessA to 10
  set brightnessB to 1000
```



```
forever
  set buttonStateA to digital read pin P1
  if << buttonStateA = 1 and brightnessA != 1000 >> then
    set brightnessA to brightnessA + 99
    pause (ms) 10
  +
  if << buttonStateA = 0 and brightnessA != 10 >> then
    set brightnessA to brightnessA - 99
    pause (ms) 1
  +
  analog write pin P2 to brightnessA
  set buttonStateB to digital read pin P3
  if << buttonStateB = 1 and brightnessB != 10 >> then
    set brightnessB to brightnessB - 99
    pause (ms) 1
  +
  if << buttonStateB = 0 and brightnessB != 1000 >> then
    set brightnessB to brightnessB + 99
    pause (ms) 1
  +
  analog write pin P0 to brightnessB
  serial write value "brightnessA" = brightnessA
  serial write value "brightnessB" = brightnessB
```



"on start" : command block only runs once to start program.

Turn off LED dot matrix of micro:bit

Set variable buttonStateA to 0

Set variable buttonStateB to 0

Set variable brightnessA to 10

Set variable brightnessB to 1000

The program under the block "forever" runs cyclically.

Set the digital signal read by P1 to variable buttonStateA

If buttonStateA=1 and brightnessA≠1000, the program under then block will be executed

Set variable brightnessA+99= variable brightnessA

Delay in 10ms

If buttonStateA=0 and brightnessA≠10, the program under then block will be executed

Set variable brightnessA-99 to brightnessA

Delay in 1ms

Set the analog value of P2 to brightnessA

Set the digital signals read by P3 to buttonStateB

If buttonStateB=1 and brightnessB≠10, the program under then block will be executed

Set variable brightnessB-99 to variable brightnessB

Delay in 1ms

If buttonStateB=0 and brightnessB≠1000, the program under then will be executed

Set variable brightnessB+99 to variable brightnessB

Delay in 1ms

Set the analog value of P0 to brightnessB

Serial writes "brightnessA" = variable brightnessA

Serial writes "brightnessB" = variable brightnessB



Test Results

Wire up according to connection diagram. plug in external power and upload code to micro:bit, tilt the two magic light cup sensors at the same time, one LED of light cup gradually darkens, and the other one gradually lights up. On the contrary, when the two magic light cup modules are tilted to the other side, one of the LEDs gradually brightens and another one gradually dims, similarly the light shifts position.

Project58:18B20 Thermometry

Description:

This 18B20 module adopts a DS18B20 sensor, which is a bus temperature sensing component. Besides, it supports multi-point networking, that is,



digital

multiple DS18B20 parallel in the sole three-wire to measure temperature of many points.


The core function of DS18B20 is direct digital temperature measurement with a configurable resolution of 9-bit, 10-bit, 11-bit and 12-bit, which correspond to 0.5°C, 0.25°C, 0.125°C ,and 0.0625°C.

By default, the resolution is 12-bit after it powering on. Its detected results



are within the range of 55°C ~ + 125°C and accomplished via a 9-bit ~ 12-bit digital serial transfer.


Wiring Diagram:

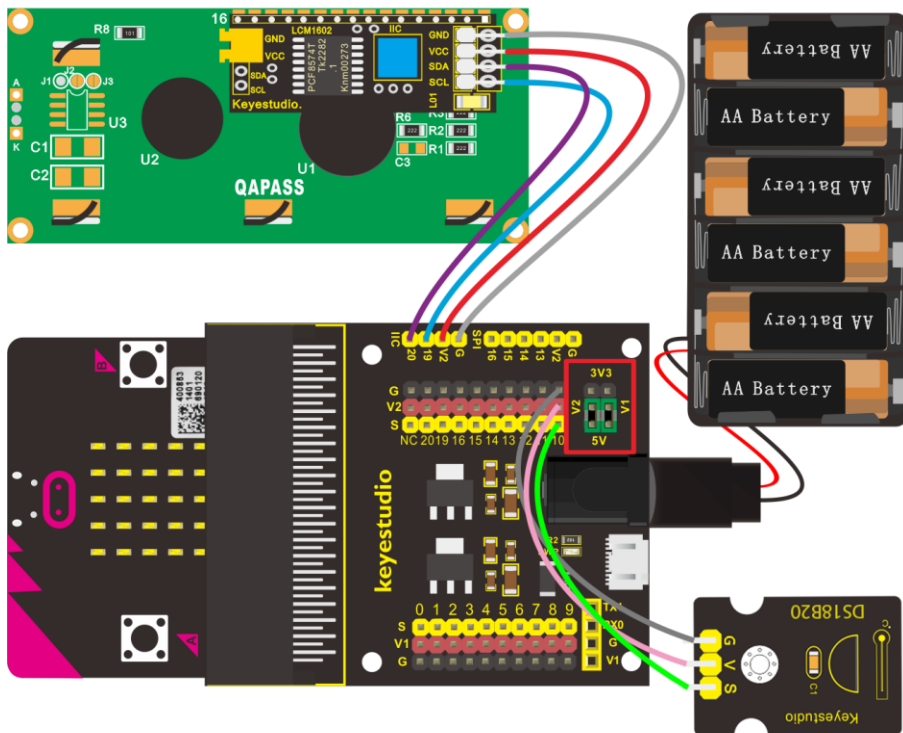




Test Code:

(1) Click “Extensions” and add libraries to upload codes:

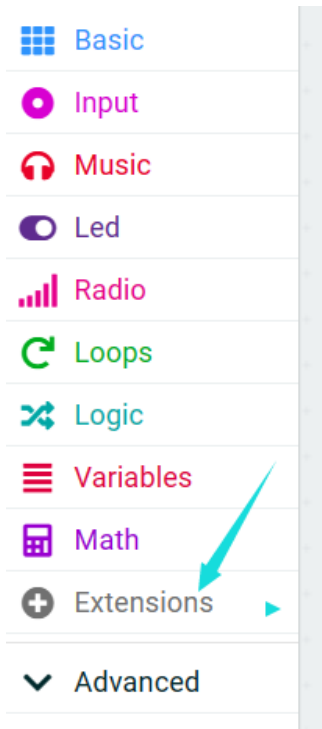

(2) Click: <https://github.com/lionyhq/pxt-18b20-v2only>

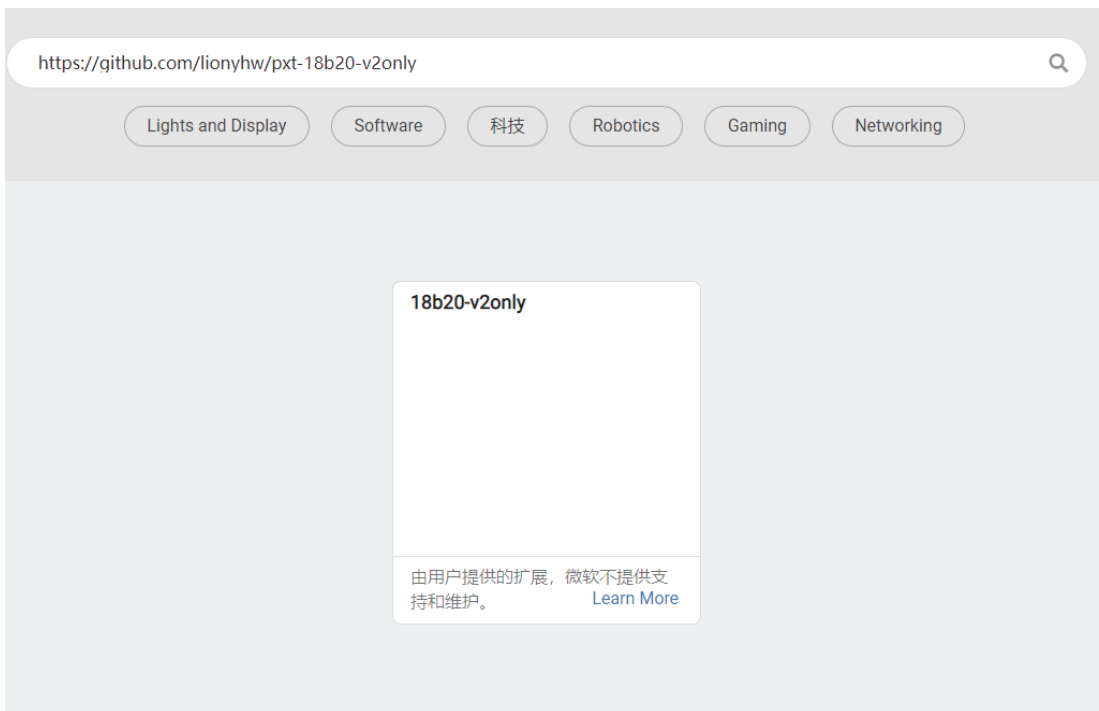

(3) Code



```
on start
  led enable false
forever
  serial write line "Temp:"
  serial write number value of DS18B20 temperature(°C) at pin P10
  serial write line "C"
  pause (ms) 200
```


(4) Code Explanation

<pre>on start led enable false forever serial write line "Temp:" serial write number value of DS18B20 temperature(°C) at pin P10 serial write line "C" pause (ms) 200</pre>	<ul style="list-style-type: none">① "on start" only executes once to start the program.② Turn off LED dot matrix.③ "forever" runs the code in a loop.④ Serial port prints temperature value.⑤ Delay 200ms.
---	--



After wiring up, uploading code and powering on, open CoolTerm and click Options, select SerialPort to set COM port and baud rate to 115200. (The tested baud rate of micro:bit USB serial communication is 115200.)

Click OK and Connect. The monitor displays the ambient temperature value, as shown below:

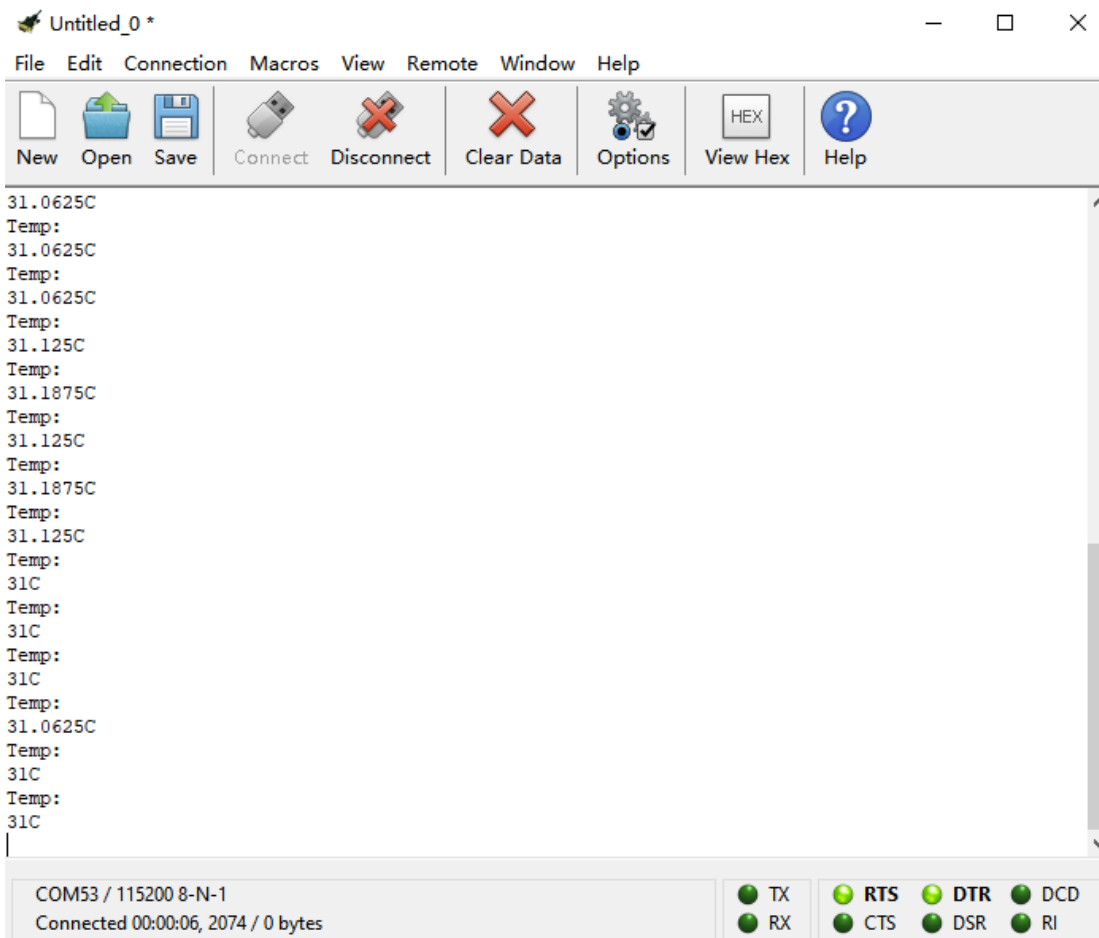



Code 2:

```
on start
  led enable false
  LCD1602 I2C address 0x27
  LCD show string "Temp:"
  on x: 0
  y: 0
  set string visibled
  set LCD backlight on

forever
  LCD show number value of DS18B20 temperature(°C) at pin P10
  on x: 5
  y: 0
  LCD show string "C"
  on x: 12
  y: 0
  pause (ms) 100
```



Test Result

After wiring up, uploading code and powering on, LCD1602 display shows the ambient temperature value.

7.Resources

<https://fs.keyestudio.com/KS4009-4010>